

Solutions Manual Accompanying

Elements of Electromagnetics,

Third Edition

Matthew Sadiku, Jerry Sagliocca, and Oladega Soriyan

Collected by :

Md. Shafiu Azam
shafi016.blogspot.com

TABLE OF CONTENTS

Chapter 1	1
Chapter 2	15
Chapter 3	40
Chapter 4	78
Chapter 5	113
Chapter 6	129
Chapter 7	164
Chapter 8	193
Chapter 9	221
Chapter 10	240
Chapter 11	280
Chapter 12	328
Chapter 13	350
Chapter 14	384
Chapter 15	389

CHAPTER 1

P. E. 1.1

(a) $\mathbf{A} + \mathbf{B} = (1,0,3) + (5,2,-6) = (6,2,-3)$

$$|\mathbf{A} + \mathbf{B}| = \sqrt{36 + 4 + 9} = \underline{\underline{7}}$$

(b) $5\mathbf{A} - \mathbf{B} = (5,0,15) - (5,2,-6) = \underline{\underline{(0,-2,21)}}$

(c) The component of \mathbf{A} along \mathbf{a}_y is $\mathbf{A}_y = \underline{\underline{0}}$

(d) $3\mathbf{A} + \mathbf{B} = (3,0,9) + (5,2,-6) = (8,2,3)$

A unit vector parallel to this vector is

$$\begin{aligned}\mathbf{a}_{11} &= \frac{(8,2,3)}{\sqrt{64 + 4 + 9}} \\ &= \pm \underline{\underline{(0.9117\mathbf{a}_x + 0.2279\mathbf{a}_y + 0.3419\mathbf{a}_z)}}\end{aligned}$$

P. E. 1.2 (a) The distance vector

$$\begin{aligned}\mathbf{r}_{QR} &= \mathbf{r}_R - \mathbf{r}_Q = (0,3,8) - (2,4,6) \\ &= \underline{\underline{-2\mathbf{a}_x - \mathbf{a}_y + 2\mathbf{a}_z}}\end{aligned}$$

(b) The distance between Q and R is

$$|\mathbf{r}_{QR}| = \sqrt{4 + 1 + 4} = \underline{\underline{3}}$$

(c) Vector $\mathbf{r}_{QP} = \mathbf{r}_P - \mathbf{r}_Q = (1,-3,5) - (2,4,6) = (-1,-7,-1)$

$$\cos \theta_{PQR} = \frac{\mathbf{r}_{QR} \cdot \mathbf{r}_{QP}}{|\mathbf{r}_{QR}| |\mathbf{r}_{QP}|} = \frac{7}{3\sqrt{51}}$$

$$\theta_{PQR} = \underline{\underline{70.93^\circ}}$$



(d) Area = $\frac{1}{2} |\mathbf{r}_{QR} \times \mathbf{r}_{QP}| = \frac{1}{2} |(15, -4, 13)|$
 $= \underline{\underline{10.12}}$

P. E. 1.3 Consider the figure shown below:

$$\begin{aligned} U_z &= U_p + U_w = -350\mathbf{a}_x + \frac{40}{\sqrt{2}}(-\mathbf{a}_x + \mathbf{a}_y) \\ &= -378\mathbf{a}_x + 28.28\mathbf{a}_y \end{aligned}$$

or

$$\mathbf{u} = 379.3\angle 175.72^\circ$$

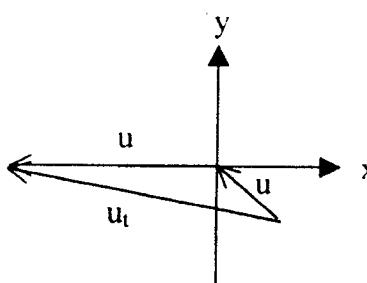

P. E. 1.4

At point (1,0), $\mathbf{G} = \mathbf{a}_y$;

at point (0,1), $\mathbf{G} = -\mathbf{a}_x$;

at point (2,0), $\mathbf{G} = \mathbf{a}_y$;

at point (1,1), $\mathbf{G} = \frac{-\mathbf{a}_x + \mathbf{a}_y}{\sqrt{2}}$; and so on.

It is evident that \mathbf{G} is a unit vector at each point. Thus the vector field \mathbf{G} is as sketched in Fig.1.8.

P. E. 1.5

Using the dot product,

$$\cos \theta_{AB} = \frac{\mathbf{A} \cdot \mathbf{B}}{AB} = \frac{-13}{\sqrt{10}\sqrt{65}} = -\sqrt{\frac{13}{50}}$$

or using the cross product,

$$\sin \theta_{AB} = \frac{|\mathbf{A} \times \mathbf{B}|}{AB} = \sqrt{\frac{481}{650}}$$

Either way,

$$\underline{\theta_{AB} = 120.66^\circ}$$

P. E. 1.6

$$(a) \mathbf{E}_F = (\mathbf{E} \cdot \mathbf{a}_F) \mathbf{a}_F = \frac{(\mathbf{E} \cdot \mathbf{F})\mathbf{F}}{|\mathbf{F}|^2} = \frac{-10(4, -10, 5)}{141}$$

$$= -0.2837\mathbf{a}_x + 0.7092\mathbf{a}_y - 0.3546\mathbf{a}_z$$

$$(b) \mathbf{E} \times \mathbf{F} = \begin{vmatrix} \mathbf{a}_x & \mathbf{a}_y & \mathbf{a}_z \\ 0 & 3 & 4 \\ 4 & -10 & 5 \end{vmatrix} = (55, 16, -12)$$

$$\mathbf{a}_{E \times F} = \pm \underline{(0.9398, 0.2734, -0.205)}$$

P. E. 1.7 $\mathbf{a} + \mathbf{b} + \mathbf{c} = 0$ showing that \mathbf{a} , \mathbf{b} , and \mathbf{c} form the sides of a triangle.

$$\mathbf{a} \cdot \mathbf{b} = 0,$$

hence it is a right angle triangle.

$$\text{Area} = \frac{1}{2} |\mathbf{a} \times \mathbf{b}| = \frac{1}{2} |\mathbf{b} \times \mathbf{c}| = \frac{1}{2} |\mathbf{c} \times \mathbf{a}|$$

$$\frac{1}{2} |\mathbf{a} \times \mathbf{b}| = \frac{1}{2} \begin{vmatrix} 4 & 0 & -1 \\ 1 & 3 & 4 \end{vmatrix} = \frac{1}{2} |(3, -17, 12)|$$

$$\text{Area} = \frac{1}{2} \sqrt{9 + 289 + 144} = \underline{\underline{10.51}}$$

P. E. 1.8

$$(a) \mathbf{P}_1 \mathbf{P}_2 = \sqrt{(x_2 - x_1)^2 + (y_2 - y_1)^2 + (z_2 - z_1)^2}$$

$$= \sqrt{25 + 4 + 64} = \underline{\underline{9.644}}$$

$$(b) \mathbf{r}_P = \mathbf{r}_{P_1} + \lambda(\mathbf{r}_{P_2} - \mathbf{r}_{P_1})$$

$$= (1, 2, -3) + \lambda(-5, -2, 8)$$

$$= \underline{\underline{(1 - 5\lambda, 2 - 2\lambda, -3 + 8\lambda)}}.$$

(c) The shortest distance is

$$\mathbf{d} = \mathbf{P}_1 \mathbf{P}_3 \sin \theta = |\mathbf{P}_1 \mathbf{P}_3 \times \mathbf{a}_{P_1 P_2}|$$

$$= \frac{1}{\sqrt{93}} \begin{vmatrix} 6 & -3 & 5 \\ -5 & -2 & 8 \end{vmatrix}$$

$$= \frac{1}{\sqrt{93}} |(-14, -73, -27)| = \underline{\underline{8.2}}$$

Prob. 1.1

$$\mathbf{r} = (-3, 2, 2) - (2, 4, 4) = (-5, -2, -2)$$

$$\mathbf{a}_r = \frac{\mathbf{r}}{|\mathbf{r}|} = \frac{(-5, -2, -2)}{\sqrt{25 + 4 + 4}} = -0.8703\mathbf{a}_x - 0.3482\mathbf{a}_y - 0.3482\mathbf{a}_z$$

Prob. 1.2

$$(a) \mathbf{A} + 2\mathbf{B} = (2, 5, -3) + (6, -8, 0) = \underline{\underline{8\mathbf{a}_x - 3\mathbf{a}_y - 3\mathbf{a}_z}}$$

$$(b) \mathbf{A} - 5\mathbf{C} = (2, 5, -3) - (5, 5, 5) = (-3, 0, -8)$$

$$|\mathbf{A} - 5\mathbf{C}| = \sqrt{9 + 0 + 64} = \underline{\underline{8.544}}$$

$$(c) k\mathbf{B} = 3k\mathbf{a}_x - 4k\mathbf{a}_y$$

$$|k\mathbf{B}| = \sqrt{9k^2 + 16k^2} = \pm 5k = 2$$

$$\Rightarrow k = \underline{\underline{\pm 0.4}}$$

$$(d) \mathbf{A} \cdot \mathbf{B} = (2, 5, -3) \cdot (3, -4, 0) = 6 - 20 + 0 = 14$$

$$\mathbf{A} \times \mathbf{B} = \begin{vmatrix} 2 & 5 & -3 \\ 3 & -4 & 0 \end{vmatrix} = (-12, -9, -23)$$

$$\frac{\mathbf{A} \times \mathbf{B}}{\mathbf{A} \cdot \mathbf{B}} = \left(\frac{12}{14}, \frac{9}{14}, \frac{23}{14} \right) = \underline{\underline{0.8571\mathbf{a}_x + 0.6428\mathbf{a}_y + 1.642\mathbf{a}_z}}$$

Prob. 1.3

$$(a) \mathbf{A} - 2\mathbf{B} = (2, 1, -3) - (0, 2, -2) = (2, -1, -1)$$

$$\mathbf{A} - 2\mathbf{B} + \mathbf{C} = \underline{\underline{5\mathbf{a}_x + 4\mathbf{a}_y + 6\mathbf{a}_z}}$$

$$(b) \mathbf{A} + \mathbf{B} = (2, 2, -4)$$

$$\mathbf{C} - 4(\mathbf{A} + \mathbf{B}) = (3, 5, 7) - (8, 8, -16) = \underline{\underline{-5\mathbf{a}_x - 3\mathbf{a}_y + 23\mathbf{a}_z}}$$

$$(c) 2\mathbf{A} - 3\mathbf{B} = (4, 2, -6) - (0, 3, -3) = (4, -1, -3)$$

$$|\mathbf{C}| = \sqrt{9 + 25 + 49} = 9.11$$

$$\frac{2\mathbf{A} - 3\mathbf{B}}{|\mathbf{C}|} = \underline{\underline{0.439\mathbf{a}_x - 0.11\mathbf{a}_y - 0.3293\mathbf{a}_z}}$$

$$(d) \mathbf{A} \cdot \mathbf{C} = 6 + 5 - 21 = -10,$$

$$|\mathbf{B}| = \sqrt{2}$$

$$\mathbf{A} \cdot \mathbf{C} - |\mathbf{B}|^2 = -10 + 2 = \underline{\underline{-8}}$$

$$(e) \frac{1}{3}\mathbf{A} + \frac{1}{4}\mathbf{C} = \left(\frac{2}{3}, \frac{1}{3}, -1\right) + \left(\frac{3}{4}, \frac{5}{4}, \frac{7}{4}\right) = (1.4167, 1.5833, 0.75)$$

$$\frac{1}{2}\mathbf{B} \times \left(\frac{1}{3}\mathbf{A} + \frac{1}{4}\mathbf{C}\right) = \frac{1}{2} \begin{vmatrix} 0 & 1 & -1 \\ 1.4167 & 1.5833 & 0.75 \end{vmatrix} = \underline{\underline{1.1667\mathbf{a}_x - 0.7084\mathbf{a}_y - 0.7084\mathbf{a}_z}}$$

Prob. 1.4

$$(a) T = (3, -2, 1) \text{ and } S = (4, 6, 2)$$

$$(b) \mathbf{r}_{TS} = \mathbf{r}_S - \mathbf{r}_T = (4, 6, 2) - (3, -2, 1) = \underline{\underline{\mathbf{a}_x + 8\mathbf{a}_y + \mathbf{a}_z}}$$

$$(c) \text{ distance} = |\mathbf{r}_{TS}| = \sqrt{1+64+1} = \underline{\underline{8.124 \text{ m}}}$$

Prob. 1.5

$$\text{Let } \mathbf{D} = \alpha\mathbf{A} + \beta\mathbf{B} + \mathbf{C}$$

$$= (5\alpha - \beta + 8)\mathbf{a}_x + (3\alpha + 4\beta + 2)\mathbf{a}_y + (-2\alpha + 6\beta)\mathbf{a}_z$$

$$\mathbf{D}_x = 0 \rightarrow 5\alpha - \beta + 8 = 0 \quad (1)$$

$$\mathbf{D}_z = 0 \rightarrow -2\alpha + 6\beta = 0 \rightarrow \alpha = 3\beta \quad (2)$$

Substituting (2) into (1),

$$15\beta - \beta + 8 = 0 \rightarrow \beta = -\frac{8}{14} = -\frac{4}{7}$$

Thus

$$\underline{\underline{\alpha = -\frac{12}{7}, \beta = -\frac{4}{7}}}$$

Prob. 1.6

$$\mathbf{A} \cdot \mathbf{B} = 0 \rightarrow 0 = 3\alpha + \beta - 24 \quad (1)$$

$$\mathbf{A} \cdot \mathbf{C} = 0 \rightarrow 0 = 5\alpha - 2 + 4\gamma \quad (2)$$

$$\mathbf{B} \cdot \mathbf{C} = 0 \rightarrow 0 = 15 - 2\beta - 6\gamma \quad (3)$$

In matrix form,

$$\begin{bmatrix} 24 \\ 2 \\ 15 \end{bmatrix} = \begin{bmatrix} 3 & 1 & 0 \\ 5 & 0 & 4 \\ 0 & 2 & 6 \end{bmatrix} \begin{bmatrix} \alpha \\ \beta \\ \gamma \end{bmatrix}$$

$$\Delta = \begin{vmatrix} 3 & 1 & 0 \\ 5 & 0 & 4 \\ 0 & 2 & 6 \end{vmatrix} = 3(0 - 8) - 1(30 - 0) + 0(10 - 0) = -24 - 30 = -54$$

$$\Delta_1 = \begin{vmatrix} 24 & 1 & 0 \\ 2 & 0 & 4 \\ 15 & 2 & 6 \end{vmatrix} = -24 \times 8 - (12 - 60) = -144$$

$$\Delta_2 = \begin{vmatrix} 3 & 24 & 0 \\ 5 & 2 & 4 \\ 0 & 15 & 6 \end{vmatrix} = 3(12 - 60) - 24 \times 30 = -864$$

$$\Delta_3 = \begin{vmatrix} 3 & 1 & 24 \\ 5 & 0 & 2 \\ 0 & 2 & 15 \end{vmatrix} = -12 - 75 + 240 = 153$$

$$\alpha = \frac{\Delta_1}{\Delta} = \frac{-144}{-54} = \underline{\underline{2.667}}$$

$$\beta = \frac{\Delta_2}{\Delta} = \frac{-864}{-54} = \underline{\underline{16}}$$

$$\gamma = \frac{\Delta_3}{\Delta} = \frac{153}{-54} = \underline{\underline{-2.833}}$$

Prob. 1.7

$$(a) \mathbf{A} \cdot \mathbf{B} = \mathbf{AB} \cos \theta_{AB}$$

$$\mathbf{A} \times \mathbf{B} = \mathbf{AB} \sin \theta_{AB} \mathbf{a}_n$$

$$(\mathbf{A} \cdot \mathbf{B})^2 + |\mathbf{A} \times \mathbf{B}|^2 = (\mathbf{AB})^2 (\cos^2 \theta_{AB} + \sin^2 \theta_{AB}) = (\mathbf{AB})^2$$

(b) $\mathbf{a}_x \cdot (\mathbf{a}_y \times \mathbf{a}_z) = \mathbf{a}_x \cdot \mathbf{a}_x = 1$. Hence,

$$\frac{\mathbf{a}_y \times \mathbf{a}_z}{\mathbf{a}_x \cdot \mathbf{a}_y \times \mathbf{a}_z} = \frac{\mathbf{a}_x}{1} = \mathbf{a}_x$$

$$\frac{\mathbf{a}_z \times \mathbf{a}_x}{\mathbf{a}_x \cdot \mathbf{a}_y \times \mathbf{a}_z} = \frac{\mathbf{a}_y}{1} = \mathbf{a}_y$$

$$\frac{\mathbf{a}_x \times \mathbf{a}_y}{\mathbf{a}_x \cdot \mathbf{a}_y \times \mathbf{a}_z} = \frac{\mathbf{a}_z}{1} = \mathbf{a}_z$$

Prob. 1.8

(a) $\mathbf{P} + \mathbf{Q} = (2, 2, 0)$, $\mathbf{P} + \mathbf{Q} - \mathbf{R} = (3, 1, -2)$

$$|\mathbf{P} + \mathbf{Q} - \mathbf{R}| = \sqrt{9 + 1 + 4} = \sqrt{14} = \underline{\underline{3.742}}$$

$$(b) \mathbf{P} \cdot \mathbf{Q} \times \mathbf{R} = \begin{vmatrix} -2 & -1 & -2 \\ 4 & 3 & 2 \\ -1 & 1 & 2 \end{vmatrix} = -2(6 - 2) + (8 + 2) - 2(4 + 3) = -8 + 10 - 14 = \underline{\underline{-12}}$$

$$\mathbf{Q} \times \mathbf{R} = \begin{vmatrix} 4 & 3 & 2 \\ -1 & 1 & 2 \end{vmatrix} = (4, -10, 7)$$

$$\mathbf{P} \cdot \mathbf{Q} \times \mathbf{R} = (-2, -1, -2) \cdot (4, -10, 7) = -8 + 10 - 14 = \underline{\underline{-12}}$$

$$(c) \mathbf{Q} \times \mathbf{P} = \begin{vmatrix} 4 & 3 & 2 \\ -2 & -1 & -2 \end{vmatrix} = (-4, 4, 2)$$

$$\mathbf{Q} \times \mathbf{P} \cdot \mathbf{R} = (-4, 4, 2) \cdot (-1, 1, 2) = 4 + 4 + 4 = \underline{\underline{12}}$$

$$\text{or } \mathbf{Q} \times \mathbf{P} \cdot \mathbf{R} = \mathbf{R} \cdot \mathbf{Q} \times \mathbf{P} = \begin{vmatrix} -1 & 1 & 2 \\ 4 & 3 & 2 \\ -2 & -1 & -2 \end{vmatrix} = -(-6 + 2) - (-8 + 4) + 2(-4 + 6) = \underline{\underline{12}}$$

$$(d) (\mathbf{P} \times \mathbf{Q}) \cdot (\mathbf{Q} \times \mathbf{R}) = (4, -4, 2) \cdot (4, -10, 7) = 16 + 40 - 14 = \underline{\underline{42}}$$

$$(e) (\mathbf{P} \times \mathbf{Q}) \times (\mathbf{Q} \times \mathbf{R}) = \begin{vmatrix} 4 & -4 & 2 \\ 4 & -10 & 7 \end{vmatrix} = \underline{\underline{-48\mathbf{a}_x - 36\mathbf{a}_y - 24\mathbf{a}_z}}$$

$$(f) \cos \theta_{PR} = \frac{\mathbf{P} \cdot \mathbf{R}}{|\mathbf{P}| |\mathbf{R}|} = \frac{(2 - 1 - 4)}{\sqrt{4 + 1 + 4} \sqrt{1 + 1 + 4}} = \frac{-3}{3\sqrt{6}} = \frac{-1}{\sqrt{6}}$$

$$\underline{\underline{\theta_{PR} = 114.1^\circ}}$$

Prob. 1.11

$$\cos \theta = \frac{\mathbf{H} \cdot \mathbf{a}_x}{|\mathbf{H}|} = \frac{3}{\sqrt{9+25+64}} = \frac{3}{98}$$

$$\theta_x = \underline{\underline{72.36^\circ}}$$

$$\cos \theta = \frac{\mathbf{H} \cdot \mathbf{a}_y}{|\mathbf{H}|} = \frac{5}{\sqrt{9+25+64}} = \frac{5}{98}$$

$$\theta_y = \underline{\underline{59.66^\circ}}$$

$$\cos \theta = \frac{\mathbf{H} \cdot \mathbf{a}_z}{|\mathbf{H}|} = \frac{-8}{\sqrt{9+25+64}} = \frac{-8}{98}$$

$$\theta_z = \underline{\underline{143.91^\circ}}$$

Prob. 1.12

$$\mathbf{Q} \times \mathbf{R} = \begin{vmatrix} 1 & 1 & 1 \\ 2 & 0 & 3 \end{vmatrix} = (3, -1, -2)$$

$$\mathbf{P} \cdot (\mathbf{Q} \times \mathbf{R}) = (2, -1, 1) \cdot (3, -1, 2) = 6 + 1 - 2 = \underline{\underline{5}}$$

Prob. 1.13

(a) Using the fact that

$$(\mathbf{A} \times \mathbf{B}) \times \mathbf{C} = (\mathbf{A} \cdot \mathbf{C})\mathbf{B} - (\mathbf{B} \cdot \mathbf{C})\mathbf{A},$$

we get

$$\mathbf{A} \times (\mathbf{A} \times \mathbf{B}) = -(\mathbf{A} \times \mathbf{B}) \times \mathbf{A} = (\mathbf{B} \cdot \mathbf{A})\mathbf{A} - (\mathbf{A} \cdot \mathbf{A})\mathbf{B}$$

$$(b) \mathbf{A} \times (\mathbf{A} \times (\mathbf{A} \times \mathbf{B})) = \mathbf{A} \times [(\mathbf{A} \cdot \mathbf{B})\mathbf{A} - (\mathbf{A} \cdot \mathbf{A})\mathbf{B}] \\ = (\mathbf{A} \cdot \mathbf{B})(\mathbf{A} \times \mathbf{A}) - (\mathbf{A} \cdot \mathbf{A})(\mathbf{A} \times \mathbf{B})$$

Prob. 1.14

$\mathbf{A} \cdot (\mathbf{B} \times \mathbf{C}) = \begin{vmatrix} A_x & A_y & A_z \\ B_x & B_y & B_z \\ C_x & C_y & C_z \end{vmatrix}, \quad (\mathbf{A} \times \mathbf{B}) \cdot \mathbf{C} = \begin{vmatrix} A_x & A_y & A_z \\ B_x & B_y & B_z \\ C_x & C_y & C_z \end{vmatrix}$
--

Hence, $\mathbf{A} \cdot (\mathbf{B} \times \mathbf{C}) = (\mathbf{A} \times \mathbf{B}) \cdot \mathbf{C}$

Prob. 1.15

$$\mathbf{P}_1\mathbf{P}_2 = \mathbf{r}_{P_2} - \mathbf{r}_{P_1} = (-6, 0, -3)$$


$$\mathbf{P}_1\mathbf{P}_3 = \mathbf{r}_{P_3} - \mathbf{r}_{P_1} = (1, 5, -6)$$

$$\mathbf{P}_1\mathbf{P}_2 \times \mathbf{P}_1\mathbf{P}_3 = \begin{vmatrix} -6 & 0 & -3 \\ 1 & 5 & -6 \end{vmatrix} = (15, 39, -30)$$

$$\text{Area of the triangle} = \frac{1}{2} |\mathbf{P}_1\mathbf{P}_2 \times \mathbf{P}_1\mathbf{P}_3| = \frac{1}{2} \sqrt{15^2 + 39^2 + 30^2} = \underline{\underline{25.72}}$$

Prob. 1.16

Let $\mathbf{P}_1 = (4, 1, -3)$, $\mathbf{P}_2 = (-2, 5, 4)$, and $\mathbf{P}_3 = (0, 1, 6)$

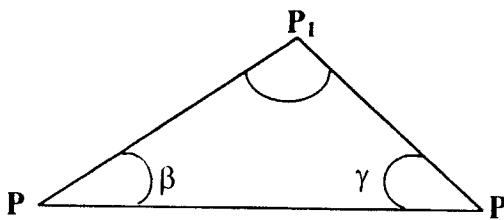

$$\mathbf{a} = \mathbf{r}_{P_2} - \mathbf{r}_{P_1} = (-2, 5, 4) - (4, 1, -3) = (-6, 4, 7)$$

$$\mathbf{b} = \mathbf{r}_{P_3} - \mathbf{r}_{P_1} = (0, 1, 6) - (4, 1, -3) = (2, -4, 2)$$

$$\mathbf{c} = \mathbf{r}_{P_2} - \mathbf{r}_{P_3} = (-2, 5, 4) - (0, 1, 6) = (4, 0, -9)$$

Note that $\mathbf{a} + \mathbf{b} + \mathbf{c} = 0$

$$\mathbf{a} \cdot \mathbf{b} = ab \cos(180 - \gamma) \rightarrow -\cos \gamma = \frac{\mathbf{a} \cdot \mathbf{b}}{|\mathbf{a}| |\mathbf{b}|} = \frac{-12 - 16 + 14}{\sqrt{101} \sqrt{24}}$$

$$\gamma = \cos^{-1} \frac{14}{\sqrt{101} \sqrt{24}} = \underline{\underline{73.47^\circ}}$$

$$\mathbf{b} \cdot \mathbf{c} = bc \cos(180 - \beta) \rightarrow -\cos \beta = \frac{\mathbf{b} \cdot \mathbf{c}}{|\mathbf{b}| |\mathbf{c}|} = \frac{8 + 0 - 18}{\sqrt{24} \sqrt{97}}$$

$$\beta = \cos^{-1} \frac{10}{\sqrt{24} \sqrt{97}} = \underline{\underline{78.04^\circ}}$$

$$\mathbf{a} \cdot \mathbf{c} = ac \cos(180 - \alpha) \rightarrow -\cos \alpha = \frac{\mathbf{a} \cdot \mathbf{c}}{|\mathbf{a}| |\mathbf{c}|} = \frac{-24 + 0 - 63}{\sqrt{101} \sqrt{97}}$$

$$\alpha = \cos^{-1} \frac{87}{\sqrt{101} \sqrt{97}} = \underline{\underline{28.48^\circ}}$$

Prob. 1.17

(a) $\mathbf{r}_{PQ} = \mathbf{r}_Q - \mathbf{r}_P = (2, -1, 3) - (-1, 4, 8) = (3, -5, -5)$

$$r_{PQ} = |\mathbf{r}_{PQ}| = \sqrt{9 + 25 + 25} = \underline{\underline{7.681}}$$

(b) $\mathbf{r}_{PR} = \mathbf{r}_R - \mathbf{r}_P = (-1, 2, 3) - (-1, 4, 8) = (0, -2, -5) = -2\mathbf{a}_y - 5\mathbf{a}_z$

(c) $\mathbf{r}_{QP} = -\mathbf{r}_{PQ} = -3\mathbf{a}_x + 5\mathbf{a}_y + 5\mathbf{a}_z$

$$\mathbf{r}_{QR} = \mathbf{r}_Q - \mathbf{r}_R = (2, -1, 3) - (-1, 2, 3) = 3\mathbf{a}_x - 3\mathbf{a}_y$$

$$\cos \theta = \frac{\mathbf{r}_{QP} \cdot \mathbf{r}_{QR}}{|\mathbf{r}_{QP}| |\mathbf{r}_{QR}|} = \frac{-9 - 15}{\sqrt{9 + 25 + 25} \sqrt{9 + 9}} = \frac{-24}{\sqrt{18} \sqrt{59}}$$

$$\underline{\underline{\theta = 137.43^\circ}}$$

(d) Area = $\frac{1}{2} |\mathbf{r}_{QP} \times \mathbf{r}_{QR}|$

$$\mathbf{r}_{QP} \times \mathbf{r}_{QR} = \begin{vmatrix} -3 & 5 & 5 \\ 3 & -3 & 0 \end{vmatrix} = 15\mathbf{a}_x + 15\mathbf{a}_y - 6\mathbf{a}_z$$

$$\text{Area} = \frac{1}{2} \sqrt{15^2 + 15^2 + 6^2} = \underline{\underline{11.02}}$$

(e) Perimeter = $QP + PR + RQ = \mathbf{r}_{QP} + \mathbf{r}_{PR} + \mathbf{r}_{QR}$
 $= \sqrt{59} + \sqrt{4 + 25} + \sqrt{18}$
 $= 7.681 + 5.385 + 4.243$
 $= \underline{\underline{17.31}}$

Prob. 1.18

(a) Let $\mathbf{A} = (A, B, C)$ and $\mathbf{r} = (x, y, z)$

$$(\mathbf{r} - \mathbf{A}) \cdot \mathbf{A} = (x - A)A + (y - B)B + (z - C)C
= Ax + By + Cz + D$$

where $D = -A^2 - B^2 - C^2$. Hence,

$$(\mathbf{r} - \mathbf{A}) \cdot \mathbf{A} = 0 \rightarrow Ax + By + Cz + D = 0$$

which is the equation of a plane.

(b) $(\mathbf{r} - \mathbf{A}) \cdot \mathbf{r} = (x - A)x + (y - B)y + (z - C)z$

If $(\mathbf{r} - \mathbf{A}) \cdot \mathbf{r} = 0$, then


$$x^2 + y^2 + z^2 - Ax - By - Cz = 0$$

which is the equation of a sphere whose surface touches the origin.

(c) See parts (a) and (b).

Prob. 1.19

(a) Let P and Q be as shown below:

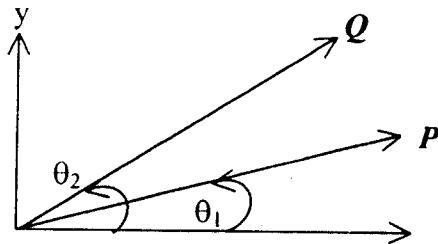

$$|P| = \cos^2 \theta_1 + \sin^2 \theta_1 = 1, |Q| = \cos^2 \theta_2 + \sin^2 \theta_2 = 1,$$

Hence P and Q are unit vectors.

$$(b) P \cdot Q = (1)(1)\cos(\theta_2 - \theta_1)$$


But $P \cdot Q = \cos \theta_1 \cos \theta_2 + \sin \theta_1 \sin \theta_2$. Thus,

$$\underline{\cos(\theta_2 - \theta_1) = \cos \theta_1 \cos \theta_2 + \sin \theta_1 \sin \theta_2}$$

Let $P_1 = P = \cos \theta_1 \mathbf{a}_x + \sin \theta_1 \mathbf{a}_y$, and

$$Q_1 = \cos \theta_2 \mathbf{a}_x - \sin \theta_2 \mathbf{a}_y.$$

P_1 and Q_1 are unit vectors as shown below:

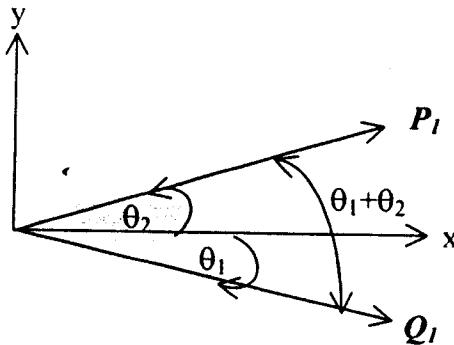

$$P_1 \cdot Q_1 = (1)(1)\cos(\theta_1 + \theta_2)$$

But $P_1 \cdot Q_1 = \cos \theta_1 \cos \theta_2 - \sin \theta_1 \sin \theta_2$,

$$\underline{\cos(\theta_2 + \theta_1) = \cos \theta_1 \cos \theta_2 - \sin \theta_1 \sin \theta_2}$$

Alternatively, we can obtain this formula from the previous one by replacing θ_2 by $-\theta_2$ in Q .

(c)

$$\frac{1}{2}|P - Q| = \frac{1}{2}|(\cos\theta_1 - \cos\theta_2)\mathbf{a}_x + (\sin\theta_1 - \sin\theta_2)\mathbf{a}_y|$$

$$= \frac{1}{2}\sqrt{\cos^2\theta_1 + \sin^2\theta_1 + \cos^2\theta_2 + \sin^2\theta_2 - 2\cos\theta_1\cos\theta_2 - 2\sin\theta_1\sin\theta_2}$$

$$= \frac{1}{2}\sqrt{2 - 2(\cos\theta_1\cos\theta_2 + \sin\theta_1\sin\theta_2)} = \frac{1}{2}\sqrt{2 - 2\cos(\theta_2 - \theta_1)}$$

Let $\theta_2 - \theta_1 = \theta$, the angle between P and Q .

$$\frac{1}{2}|P - Q| = \frac{1}{2}\sqrt{2 - 2\cos\theta}$$

But $\cos 2A = 1 - 2\sin^2 A$.

$$\frac{1}{2}|P - Q| = \frac{1}{2}\sqrt{2 - 2 + 4\sin^2\theta/2} = \sin\theta/2$$

Thus,

$$\underline{\frac{1}{2}|P - Q| = |\sin\frac{\theta_2 - \theta_1}{2}|}$$

Prob. 1.20

$$\mathbf{w} = \frac{w(1, -2, 2)}{3} = (1, -2, 2), \mathbf{r} = \mathbf{r}_p - \mathbf{r}_o = (1, 3, 4) - (2, -3, 1) = (-1, 6, 3)$$

$$\mathbf{u} = \mathbf{w} \times \mathbf{r} = \begin{vmatrix} 1 & -2 & 2 \\ -1 & 6 & 3 \end{vmatrix} = (-18, -5, 4)$$

$$\underline{\mathbf{u} = -18\mathbf{a}_x - 5\mathbf{a}_y + 4\mathbf{a}_z}$$

Prob. 1.21

(a) At T , $A = (-4, 3, -9)$

$$|A| = \sqrt{16 + 9 + 81} = \sqrt{106} = \underline{\underline{10.3}}$$

(b) Let $\mathbf{r}_{TS} = \mathbf{B} = \mathbf{B}\mathbf{a}_B$

$$\mathbf{B} = 5.6, \mathbf{a}_B = \mathbf{a}_A = \frac{(-4,3,-9)}{10.3}$$

$$\begin{aligned}\mathbf{r}_{TS} &= \mathbf{B} = \frac{5.6(-4,3,-9)}{10.3} \\ &= \underline{\underline{-2.175\mathbf{a}_x + 1.631\mathbf{a}_y - 4.893\mathbf{a}_z}}\end{aligned}$$

(c) $\mathbf{r}_{TS} = \mathbf{r}_S - \mathbf{r}_T \rightarrow \mathbf{r}_S = \mathbf{r}_T + \mathbf{r}_{TS}$

$$\therefore \mathbf{r}_S = \underline{\underline{-0.175\mathbf{a}_x + 0.631\mathbf{a}_y - 1.893\mathbf{a}_z}}$$

Prob. 1.22

(a) At (1,2,3), $\mathbf{E} = (2,1,6)$

$$|\mathbf{E}| = \sqrt{4+1+36} = \sqrt{41} = \underline{\underline{6.403}}$$

(b) At (1,2,3), $\mathbf{F} = (2,-4,6)$

$$\begin{aligned}\mathbf{E}_F &= (\mathbf{E} \cdot \mathbf{a}_F)\mathbf{a}_F = \frac{(\mathbf{E} \cdot \mathbf{F})\mathbf{F}}{|\mathbf{F}|^2} = \frac{36}{56}(2,-4,6) \\ &= \underline{\underline{1.286\mathbf{a}_x - 2.571\mathbf{a}_y + 3.857\mathbf{a}_z}}\end{aligned}$$

(c) At (0,1,-3), $\mathbf{E} = (0,1,-3)$, $\mathbf{F} = (0,-1,0)$

$$\mathbf{E} \times \mathbf{F} = \begin{vmatrix} 0 & 1 & -3 \\ 0 & -1 & 0 \end{vmatrix} = (-3,0,0)$$

$$\mathbf{a}_{E \times F} = \pm \frac{\mathbf{E} \times \mathbf{F}}{|\mathbf{E} \times \mathbf{F}|} = \pm \underline{\underline{\mathbf{a}_x}}$$

CHAPTER 2

P. E. 2.1

(a) At P(1,3,5), $x = 1$, $y = 3$, $z = 5$,

$$\rho = \sqrt{x^2 + y^2} = \sqrt{10}, \quad z = 5, \quad \phi = \tan^{-1} y/x = 3$$

$$P(\rho, \phi, z) = P(\sqrt{10}, \tan^{-1} 3, 5) = \underline{\underline{P(3.162, 71.6^\circ, 5)}}$$

Spherical system:

$$r = \sqrt{x^2 + y^2 + z^2} = \sqrt{35} = 5.916$$

$$r = \sqrt{x^2 + y^2 + z^2} = \sqrt{35} = 5.916$$

$$\theta = \tan^{-1} \sqrt{x^2 + y^2}/z = \tan^{-1} \sqrt{10}/5 = \tan^{-1} 0.6325 = 32.31^\circ$$

$$P(r, \theta, \phi) = \underline{\underline{P(5.916, 32.31^\circ, 71.56^\circ)}}$$

At T(0,-4,3), $x = 0$, $y = -4$, $z = 3$;

$$\rho = \sqrt{x^2 + y^2} = 4, z = 3, \phi = \tan^{-1} y/x = \tan^{-1} -4/0 = 270^\circ$$

$$T(\rho, \phi, z) = \underline{\underline{T(4, 270^\circ, 3)}}.$$

Spherical system:

$$r = \sqrt{x^2 + y^2 + z^2} = 5, \theta = \tan^{-1} \rho/z = \tan^{-1} 4/3 = 53.13^\circ.$$

$$T(r, \theta, \phi) = \underline{\underline{T(5, 53.13^\circ, 270^\circ)}}.$$

At S(-3,-4,-10), $x = -3$, $y = -4$, $z = -10$;

$$\rho = \sqrt{x^2 + y^2} = 5, \phi = \tan^{-1} -4/-3 = 233.1^\circ$$

$$S(\rho, \phi, z) = \underline{\underline{S(5, 233.1^\circ, -10)}}.$$

Spherical system:

$$r = \sqrt{x^2 + y^2 + z^2} = 5\sqrt{5} = 11.18.$$

$$\theta = \tan^{-1} \rho/z = \tan^{-1} 5/-10 = 153.43^\circ;$$

$$S(r, \theta, \phi) = \underline{\underline{S(11.18, 153.43^\circ, 233.1^\circ)}}.$$

(b) In Cylindrical system, $\rho = \sqrt{x^2 + y^2}$; $yz = z\rho \sin \theta$,

$$Q_r = \frac{\rho}{\sqrt{\rho^2 + z^2}}; \quad Q_\theta = 0; \quad Q_z = \frac{z\rho \sin \phi}{\sqrt{\rho^2 + z^2}};$$

$$\begin{bmatrix} Q_\rho \\ Q_\phi \\ Q_z \end{bmatrix} = \begin{bmatrix} \cos\phi & \sin\phi & 0 \\ -\sin\phi & \cos\phi & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} Q_x \\ 0 \\ Q_z \end{bmatrix};$$

$$Q_\rho = Q_x \cos\phi = \frac{\rho \cos\phi}{\sqrt{\rho^2 + z^2}}, \quad Q_\phi = -Q_x \sin\phi = \frac{-\rho \sin\phi}{\sqrt{\rho^2 + z^2}}$$

Hence,

$$\bar{Q} = \frac{\rho}{\sqrt{x^2 + z^2}} (\cos\phi \bar{a}_\rho, -\sin\phi \bar{a}_\phi, -z \sin\phi \bar{a}_z).$$

In Spherical coordinates:

$$Q_x = \frac{r \sin\phi}{r} = \sin\phi;$$

$$Q_z = -r \sin\phi \sin\theta r \cos\theta \frac{1}{r} = -r \sin\theta \cos\theta \sin\phi.$$

$$\begin{bmatrix} Q_r \\ Q_\theta \\ Q_\phi \end{bmatrix} = \begin{bmatrix} \sin\theta \cos\phi & \sin\theta \sin\phi & \cos\theta \\ \cos\theta \cos\phi & \cos\theta \sin\phi & -\sin\phi \\ -\sin\phi & \cos\phi & 0 \end{bmatrix} \begin{bmatrix} Q_x \\ 0 \\ Q_z \end{bmatrix};$$

$$Q_r = Q_x \sin\theta \cos\phi + Q_z \cos\theta = \sin^2\theta \cos\phi - r \sin\theta \cos^2\theta \sin\phi.$$

$$Q_\theta = Q_x \cos\theta \cos\phi - Q_z \sin\theta = \sin\theta \cos\theta \cos\phi + r \sin^2\theta \cos\theta \sin\phi.$$

$$Q_\phi = -Q_x \sin\phi = -\sin\theta \sin\phi.$$

$$\therefore \bar{Q} = \sin\theta (\sin\theta \cos\phi - r \cos^2\theta \sin\phi) \bar{a}_r + \sin\theta \cos\phi (\cos\phi + r \sin\theta \sin\phi) \bar{a}_\theta - \sin\theta \sin\phi \bar{a}_\phi$$

At T :

$$\bar{Q}(x, y, z) = \frac{4}{5} \bar{a}_x + \frac{12}{5} \bar{a}_z = 0.8 \bar{a}_x + 2.4 \bar{a}_z;$$

$$\bar{Q}(\rho, \phi, z) = \frac{4}{5} (\cos 270^\circ \bar{a}_\rho - \sin 270^\circ \bar{a}_\phi - 3 \sin 270^\circ \bar{a}_z)$$

$$= 0.8 \bar{a}_\phi + 2.4 \bar{a}_z;$$

$$\bar{Q}(r, \theta, \phi) = \frac{4}{5} \left(0 - \frac{45}{25}(-1)\right) \bar{a}_r + \frac{4}{5} \left(\frac{3}{5}\right) \left(0 - \frac{20}{5}(-1)\right) \bar{a}_\theta - \frac{4}{5} (-1) \bar{a}_\phi$$

$$= \frac{36}{25} \bar{a}_r + \frac{48}{25} \bar{a}_\theta + \frac{4}{5} \bar{a}_\phi = \underline{\underline{1.44 \bar{a}_r + 1.92 \bar{a}_\theta + 0.8 \bar{a}_\phi}}$$

$$\begin{aligned}
 (\hat{A} \cdot \hat{a}_z) \hat{a}_z &= \left(\frac{3}{2} - \sqrt{3}\right) \left(\frac{1}{2} \hat{a}_r - \frac{\sqrt{3}}{2} \hat{a}_\theta\right) \\
 &= \underline{-0.116 \hat{a}_r + 0.201 \hat{a}_\theta}.
 \end{aligned}$$

Prob. 2.1

(a)

$$x = \rho \cos \phi = 1 \cos 60^\circ = 0.5;$$

$$y = \rho \sin \phi = 1 \sin 120^\circ = 0.866;$$

$$z = 2;$$

$$P(x, y, z) = \underline{P(0.5, 0.866, 2)}.$$

(b)

$$x = 2 \cos 90^\circ = 0; \quad y = 2 \sin 90^\circ = 1; \quad z = -10.$$

$$Q = \underline{Q(0, 1, -4)}.$$

(c)

$$x = r \sin \theta \cos \phi = 3 \sin 45^\circ \cos 210^\circ = -1.837;$$

$$y = r \sin \theta \sin \phi = 10 \sin 135^\circ \sin 90^\circ = -1.061;$$

$$z = r \cos \theta = 10 \cos 135^\circ = 2.121.$$

$$R(x, y, z) = \underline{R(-1.837, -1.061, 2.121)}.$$

(d)

$$x = 4 \sin 90^\circ \cos 30^\circ = 3.464.$$

$$y = 3 \sin 30^\circ \sin 240^\circ = 2.$$

$$z = r \cos \theta = 4 \cos 90^\circ = 0.$$

$$T(x, y, z) = \underline{T(3.464, 2, 0)}.$$

Prob.2.2(a) Given $P(1, -4, -3)$, convert to cylindrical and spherical values;

$$\rho = \sqrt{x^2 + y^2} = \sqrt{I^2 + (-4)^2} = \sqrt{17} = 4.123.$$

$$\phi = \tan^{-1} \frac{y}{x} = \tan^{-1} \frac{-4}{I} = 284.04^\circ.$$

$$\therefore P(\rho, \phi, z) = \underline{(4.123, 284.04^\circ, -3)}.$$

Spherical:

$$r = \sqrt{x^2 + y^2 + z^2} = \sqrt{I^2 + 16 + 9} = 5.099.$$

$$\theta = \tan^{-1} \frac{\rho}{z} = \tan^{-1} \frac{4.123}{-3} = 126.04^\circ.$$

$$P(r, \theta, \phi) = \underline{P(5.099, 126.04^\circ, 284.04^\circ)}.$$

Prob . 2.3

(a)

$$x = \rho \cos \phi, \quad y = \rho \sin \phi,$$

$$V = \underline{\rho z \cos \phi - \rho^2 \sin \phi \cos \phi + \rho z \sin \phi}$$

(b)

$$\begin{aligned} U &= x^2 + y^2 + z^2 + y^2 + 2z^2 \\ &= r^2 + r^2 \sin^2 \theta \sin^2 \phi + 2r^2 \cos^2 \theta \\ &= \underline{r^2 [1 + \sin^2 \theta \sin^2 \phi + 2 \cos^2 \theta]} \end{aligned}$$

Prob. 2.4

(a)

$$\begin{bmatrix} D_\rho \\ D_\phi \\ D_z \end{bmatrix} = \begin{bmatrix} \cos \phi & \sin \phi & 0 \\ -\sin \phi & \cos \phi & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 0 \\ x+z \\ 0 \end{bmatrix}$$

$$D_\rho = (x+z) \sin \phi = (\rho \cos \phi + z) \sin \phi$$

$$D_\phi = (x+z) \cos \phi = (\rho \cos \phi + z) \cos \phi$$

$$\bar{D} = (\rho \cos \phi + z) [\sin \phi \bar{a}_\rho + \cos \phi \bar{a}_\phi]$$

Spherical:

$$\begin{bmatrix} D_r \\ D_\theta \\ D_\phi \end{bmatrix} = \begin{bmatrix} \dots & \sin \theta \sin \phi & \dots \\ \dots & \cos \theta \sin \phi & \dots \\ \dots & \cos \phi & \dots \end{bmatrix} \begin{bmatrix} 0 \\ x+z \\ 0 \end{bmatrix}$$

$$D_r = (x+z)\sin\theta\cos\phi = r(\sin\theta\cos\phi + \cos\theta)\sin\theta\sin\phi.$$

$$D_\theta = (x+z)\cos\theta\sin\phi = r(\sin\theta\sin\phi + \cos\theta)\cos\theta\sin\phi.$$

$$D_\phi = (x+z)\cos\phi = r(\sin\theta\cos\phi + \cos\theta)\cos\phi.$$

$$\bar{D} = \underline{r(\sin\theta\cos\phi + \cos\theta)[\sin\theta\sin\phi \bar{a}_r + \cos\theta\sin\phi \bar{a}_\theta + \cos\phi \bar{a}_\phi]}.$$

(b) Cylindrical:

$$\begin{bmatrix} E_\rho \\ E_\phi \\ E_z \end{bmatrix} = \begin{bmatrix} \cos\phi & \sin\phi & 0 \\ -\sin\phi & \cos\phi & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} y^2 - x^2 \\ xyz \\ x^2 - z^2 \end{bmatrix}$$

$$\begin{aligned} E_\rho &= (y^2 - x^2)\cos\phi + xyz\sin\phi \\ &= \rho^2(\sin^2\phi - \cos^2\phi)\cos\phi + \rho^2z\cos\phi\sin^2\phi \\ &= -\rho^2\cos 2\phi\cos\phi + \rho^2z\sin^2\phi\cos\phi. \end{aligned}$$

$$\begin{aligned} E_\phi &= -(y^2 - x^2)\sin\phi + xyz\cos\phi \\ &= \rho^2\cos 2\phi\sin\phi + \rho^2\cos 2\phi\sin\phi + \rho^2z\sin\phi\cos^2\phi. \end{aligned}$$

$$E_z = x^2 - z^2 = \rho^2\cos^2\phi - z^2.$$

$$\bar{E} = \underline{\rho^2\cos\phi(z\sin^2\phi - \cos 2\phi)\bar{a}_\rho + \rho^2\sin\phi(2\cos^2\phi + \cos 2\phi)\bar{a}_\phi + (\rho^2\cos\phi - z^2)\bar{a}_z}.$$

In spherical:

$$\begin{bmatrix} E_r \\ E_\theta \\ E_\phi \end{bmatrix} = \begin{bmatrix} \sin\theta\cos\phi & \sin\theta\sin\phi & \cos\theta \\ \cos\theta\cos\phi & \cos\theta\sin\phi & -\sin\theta \\ -\sin\phi & \cos\phi & 0 \end{bmatrix} \begin{bmatrix} y^2 - x^2 \\ xyz \\ x^2 - z^2 \end{bmatrix}$$

$$E_r = (y^2 - x^2)\sin\theta\cos\phi + xyz\sin\theta\sin\phi + (x^2 - z^2)\cos\theta;$$

$$\text{but } x = r\sin\theta\cos\phi, \quad y = r\sin\theta\sin\phi, \quad z = r\cos\theta;$$

$$E_r = r^2\sin^2\theta(\sin^2\phi - \cos^2\phi)\cos\phi + r^3\sin^3\theta\cos\theta\sin^2\phi\cos\phi + r^2(\sin^2\theta\cos^2\phi)\cos\phi;$$

$$E_\theta = (y^2 - x^2)\cos\theta\cos\phi + xyz\cos\theta\sin\phi - (x^2 - z^2)\sin\theta;$$

$$= -r^2\sin^2\theta\cos 2\phi\cos\theta\cos\phi + r^3\sin^2\theta\cos^2\theta\sin^2\phi\cos\phi - r^2(\sin^2\theta\cos^2\phi - \cos^2\theta)\sin\theta;$$

$$E_\phi = (x^2 - y^2)\sin\phi + xyz\cos\phi$$

$$= r^2\sin^2\theta\cos 2\phi\sin\phi + r^3\sin^2\theta\cos^2\phi\sin\phi\cos\phi;$$

$$\begin{aligned}\bar{E} = & [-r^2 \sin^2 \theta \cos 2\phi + r^3 \sin^2 \theta \cos \theta \sin^2 \phi \cos \phi + r^2 (\sin^2 \theta \cos^2 \phi - \cos^2 \theta) \cos \theta] \bar{a}_r + \\ & [-r^2 \sin^2 \theta \cos 2\phi \cos \theta \cos \phi + r^3 \sin^2 \theta \cos^2 \theta \sin^2 \phi \cos \phi - r^2 \sin \theta (\sin^2 \theta \cos^2 \phi - \cos^2 \theta)] \bar{a}_\theta + \\ & + \underline{[r^2 \sin^2 \theta \cos 2\phi \sin \phi + r^3 \sin^2 \theta \cos^2 \phi \sin \phi \cos \theta]} \bar{a}_\phi\end{aligned}$$

Prob. 2.5 (a)

$$\begin{bmatrix} F_\rho \\ F_\phi \\ F_z \end{bmatrix} = \begin{bmatrix} \cos \phi & \sin \phi & 0 \\ -\sin \phi & \cos \phi & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \frac{x}{\sqrt{\rho^2 + z^2}} \\ \frac{y}{\sqrt{\rho^2 + z^2}} \\ \frac{4}{\sqrt{\rho^2 + z^2}} \end{bmatrix}$$

$$F_\rho = \frac{1}{\sqrt{\rho^2 + z^2}} [\rho \cos^2 \phi + \rho \sin^2 \phi] = \frac{\rho}{\sqrt{\rho^2 + z^2}};$$

$$F_\phi = \frac{1}{\sqrt{\rho^2 + z^2}} [-\rho \cos \phi \sin \phi + \rho \cos \phi \sin \phi] = 0;$$

$$F_z = \frac{4}{\sqrt{\rho^2 + z^2}};$$

$$\bar{F} = \frac{1}{\sqrt{\rho^2 + z^2}} (\rho \bar{a}_\rho + 4 \bar{a}_z).$$

In Spherical:

$$\begin{bmatrix} F_r \\ F_\theta \\ F_\phi \end{bmatrix} = \begin{bmatrix} \sin \theta \cos \phi & \sin \theta \sin \phi & \cos \theta \\ \cos \theta \cos \phi & \cos \theta \sin \phi & -\sin \theta \\ -\sin \theta & \cos \theta & 0 \end{bmatrix} \begin{bmatrix} \frac{x}{r} \\ \frac{y}{r} \\ \frac{4}{r} \end{bmatrix}$$

$$F_r = \frac{r}{r} \sin^2 \theta \cos^2 \theta + \frac{r}{r} \sin^2 \theta \sin^2 \theta + \frac{4}{r} \cos \theta = \sin^2 \theta + \frac{4}{r} \cos \theta;$$

$$F_\theta = \sin \theta \cos \theta \cos^2 \phi + \sin \theta \cos \theta \sin^2 \phi - \frac{4}{r} \sin \theta = \sin \theta \cos \theta - \frac{4}{r} \sin \theta;$$

$$F_\phi = -\sin \theta \cos \phi \sin \phi + \sin \theta \sin \phi \cos \phi = 0;$$

$$\therefore \bar{F} = (\sin^2 \theta + \frac{4}{r} \sin \theta) \bar{a}_r + \sin \theta (\cos \theta - \frac{4}{r}) \bar{a}_\theta.$$

(b)

$$\begin{bmatrix} G_\rho \\ G_\theta \\ G_z \end{bmatrix} = \begin{bmatrix} \cos \phi & \sin \phi & 0 \\ -\sin \phi & \sin \phi & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \frac{x\rho^2}{\sqrt{\rho^2 + z^2}} \\ \frac{y\rho^2}{\sqrt{\rho^2 + z^2}} \\ \frac{z\rho^2}{\sqrt{\rho^2 + z^2}} \end{bmatrix}$$

$$G_\rho = \frac{\rho^2}{\sqrt{\rho^2 + z^2}} [\rho \cos^2 \phi + \rho \sin^2 \phi] = \frac{\rho^3}{\sqrt{\rho^2 + z^2}};$$

$$G_\theta = 0;$$

$$G_z = \frac{z\rho^2}{\sqrt{\rho^2 + z^2}};$$

$$\bar{G} = \frac{\rho^2}{\sqrt{\rho^2 + z^2}} (\rho \bar{a}_\rho + z \bar{a}_z).$$

Spherical :

$$\begin{bmatrix} G_r \\ G_\theta \\ G_\phi \end{bmatrix} = \begin{bmatrix} \sin \theta \cos \phi & \sin \theta \sin \phi & \cos \theta \\ \cos \theta \cos \phi & \cos \theta \sin \phi & -\sin \theta \\ -\sin \phi & \cos \phi & 0 \end{bmatrix} \begin{bmatrix} \frac{xr \sin \theta}{r} \\ y \sin \theta \\ z \sin \theta \end{bmatrix}$$

$$G_r = r \sin^2 \theta \cos^2 \phi + r \sin^2 \theta \sin^2 \phi + r \cos^2 \theta \sin \theta \\ = r \sin^3 \theta + r \cos^2 \theta \sin \theta = r \sin \theta.$$

$$G_\theta = r \sin^2 \theta \cos \theta \cos^2 \phi + r \sin^2 \theta \cos \theta \sin^2 \phi - r \sin^3 \theta \cos \theta \\ = r \sin^2 \theta \cos \theta - r \sin^2 \theta \cos \theta = 0.$$

$$G_\phi = -r \sin^2 \theta \sin \phi \cos \phi + r \sin^2 \theta \cos \phi \sin \phi = 0.$$

$$\therefore \bar{G} = \underline{\underline{r \sin \theta \bar{a}_r}}.$$

Prob. 2.6 (a)

$$\begin{bmatrix} A_x \\ A_y \\ A_z \end{bmatrix} = \begin{bmatrix} \cos \phi & -\sin \phi & 0 \\ \sin \phi & \cos \phi & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \rho(z^2 + I) \\ -\rho z \cos \phi \\ 0 \end{bmatrix}$$

$$A_x = \rho(z^2 + I) \cos \phi + \rho z \sin \phi \cos \phi \\ = \sqrt{x^2 + y^2} (z^2 + I) \frac{x}{\sqrt{x^2 + y^2}} + \sqrt{x^2 + y^2} \left(\frac{zxy}{x^2 + y^2} \right) \\ = x(z^2 + I) + \frac{xyz}{\sqrt{x^2 + y^2}}.$$

$$A_y = \rho(z^2 + I) \sin \phi - \rho z \cos^2 \phi \\ = \sqrt{x^2 + y^2} (z^2 + I) \frac{y}{\sqrt{x^2 + y^2}} - \frac{x^2 z}{\sqrt{x^2 + y^2}} \\ = y(z^2 + I) - \frac{x^2 z}{\sqrt{x^2 + y^2}};$$

$$A_z = 0;$$

$$\therefore \bar{A} = \underline{\underline{[x(z^2 + I) + \frac{xyz}{\sqrt{x^2 + y^2}}] \bar{a}_x + [y(z^2 + I) - \frac{x^2 z}{\sqrt{x^2 + y^2}}] \bar{a}_y}}.$$

$$\begin{bmatrix} B_x \\ B_y \\ B_z \end{bmatrix} = \begin{bmatrix} \sin\theta \cos\phi & \cos\theta \cos\phi & -\sin\phi \\ \sin\theta \sin\phi & \cos\theta \sin\phi & \cos\phi \\ \cos\theta & -\sin\theta & 0 \end{bmatrix} \begin{bmatrix} 2x \\ r \cos\theta \cos\theta \\ -r \sin\phi \end{bmatrix}$$

$$B_x = 2x \sin\theta \cos\phi + r \cos^2\theta \cos^2\phi + r \sin^2\phi$$

$$= \frac{2x^2 \sqrt{x^2 + y^2}}{\sqrt{x^2 + y^2} \sqrt{x^2 + y^2 + z^2}} + \frac{\sqrt{x^2 + y^2 + z^2}}{x^2 + y^2 + z^2} \left(\frac{xz}{x^2 + y^2} \right) + \sqrt{x^2 + y^2 + z^2} \left(\frac{y^2}{x^2 + y^2} \right)$$

$$= \frac{2x^2}{\sqrt{x^2 + y^2 + z^2}} + \frac{xz}{(x^2 + y^2) \sqrt{x^2 + y^2 + z^2}} + \frac{y^2 \sqrt{x^2 + y^2 + z^2}}{x^2 + y^2};$$

$$B_y = 2x \sin\theta \sin\phi + r \cos^2\theta \sin\phi \cos\phi - r \sin\phi \cos\phi$$

$$= \frac{2xy \sqrt{x^2 + y^2}}{\sqrt{x^2 + y^2} \sqrt{x^2 + y^2 + z^2}} + \frac{\sqrt{x^2 + y^2 + z^2} (xyz^2)}{x^2 + y^2 + z^2} - \sqrt{x^2 + y^2 + z^2} \left(\frac{xy}{x^2 + y^2} \right)$$

$$= \frac{2xy}{\sqrt{x^2 + y^2 + z^2}} + \frac{xyz^2}{x^2 + y^2 \sqrt{x^2 + y^2 + z^2}} - \frac{xy \sqrt{x^2 + y^2 + z^2}}{\sqrt{x^2 + y^2}};$$

$$B_z = 2x \cos\phi - r \sin\theta \cos\theta \cos\phi$$

$$= \frac{2xz}{\sqrt{x^2 + y^2 + z^2}} - \frac{\sqrt{x^2 + y^2 + z^2}}{(x^2 + y^2 + z^2)} \left(\frac{xy}{\sqrt{x^2 + y^2}} \right)$$

$$= \frac{2xz}{\sqrt{x^2 + y^2 + z^2}} - \frac{xz}{\sqrt{x^2 + y^2 + z^2}} = \frac{xz}{\sqrt{x^2 + y^2 + z^2}};$$

$$\therefore \bar{B} = \left[\frac{2x^2}{\sqrt{x^2 + y^2 + z^2}} + \frac{xz}{(x^2 + y^2) \sqrt{x^2 + y^2 + z^2}} + \frac{y^2 \sqrt{x^2 + y^2 + z^2}}{x^2 + y^2} \right] \bar{a}_x +$$

$$\left[\frac{2xy}{\sqrt{x^2 + y^2 + z^2}} + \frac{xyz^2}{(x^2 + y^2) \sqrt{x^2 + y^2 + z^2}} - \frac{xy \sqrt{x^2 + y^2 + z^2}}{x^2 + y^2} \right] \bar{a}_y +$$

$$\left[\frac{xz}{\sqrt{x^2 + y^2 + z^2}} \right] \bar{a}_z$$

Prob 2.7 (a)

$$\begin{bmatrix} C_x \\ C_y \\ C_z \end{bmatrix} = \begin{bmatrix} \cos\phi & -\sin\phi & 0 \\ \sin\phi & \cos\phi & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} z\sin\phi \\ -\rho\cos\phi \\ 2\rho z \end{bmatrix}$$

$$C_x = z\sin\phi\cos\phi + \rho\sin\phi\cos\phi = \frac{xyz}{x^2+y^2} + \frac{xy\sqrt{x^2+y^2}}{x^2+y^2};$$

$$C_y = z\sin^2\phi - \rho\cos^2\phi = \frac{y^2z}{x^2+y^2} - \frac{x^2\sqrt{x^2+y^2}}{x^2+y^2};$$

$$C_z = 2\rho z = 2z\sqrt{x^2+y^2};$$

$$\therefore \bar{C} = \underline{\left(\frac{xyz}{x^2+y^2} + \frac{xy}{\sqrt{x^2+y^2}} \right) \bar{a}_x + \left(\frac{y^2z}{x^2+y^2} - \frac{x^2}{\sqrt{x^2+y^2}} \right) \bar{a}_y + 2z\sqrt{x^2+y^2} \bar{a}_z}$$

(b)

$$\begin{bmatrix} D_x \\ D_y \\ D_z \end{bmatrix} = \begin{bmatrix} \sin\theta\cos\phi & \cos\theta\cos\phi & -\sin\phi \\ \sin\theta\sin\phi & \cos\theta\sin\phi & \cos\phi \\ \cos\theta & -\sin\phi & 0 \end{bmatrix} \begin{bmatrix} \frac{\sin\theta}{r^2} \\ \frac{\cos\theta}{r^2} \\ 0 \end{bmatrix}$$

$$D_x = \frac{\sin^2\theta\cos\phi}{r^2} + \frac{\cos^2\theta\cos\phi}{r^2} = \frac{\cos\phi}{r^2} = \frac{x}{\sqrt{x^2+y^2}(x^2+y^2+z^2)};$$

$$D_y = \frac{\sin^2\theta\sin\phi}{r^2} + \frac{\cos^2\theta\sin\phi}{r^2} = \frac{\sin\phi}{r^2} = \frac{y}{\sqrt{x^2+y^2}(x^2+y^2+z^2)};$$

$$D_z = \frac{\sin\theta\cos\theta}{r^2} - \frac{\sin\theta\cos\theta}{r^2} = 0;$$

$$\therefore \bar{D} = \underline{\frac{1}{\sqrt{x^2+y^2}(x^2+y^2+z^2)} (x\bar{a}_x + y\bar{a}_y)}$$

Prob. 2.8 (a)

$$\bar{a}_x \bullet \bar{a}_\rho = (\cos\phi \bar{a}_\rho - \sin\phi \bar{a}_\theta) \bullet \bar{a}_\rho = \cos\phi$$

$$\bar{a}_x \bullet \bar{a}_\theta = (\cos\phi \bar{a}_\rho - \sin\phi \bar{a}_\theta) \bullet \bar{a}_\theta = -\sin\phi$$

$$\bar{a}_y \bullet \bar{a}_\rho = (\sin\phi \bar{a}_\rho + \cos\phi \bar{a}_\theta) \bullet \bar{a}_\rho = \sin\phi$$

$$\bar{a}_y \bullet \bar{a}_\theta = (\sin\phi \bar{a}_\rho + \cos\phi \bar{a}_\theta) \bullet \bar{a}_\theta = \cos\phi$$

(b)

Since \bar{a}_ρ , \bar{a}_θ , and \bar{a}_z are mutually orthogonal

$$\bar{a}_z \bullet \bar{a}_z = 1; \quad \bar{a}_z \bullet \bar{a}_\rho = 0; \quad \bar{a}_z \bullet \bar{a}_\theta = 0.$$

Also, $\bar{a}_x \bullet \bar{a}_z = 0$; $\bar{a}_y \bullet \bar{a}_z = 0$.

$$\begin{bmatrix} \cos\phi & -\sin\phi & 0 \\ \sin\phi & \cos\phi & 0 \\ 0 & 0 & 1 \end{bmatrix} = \begin{bmatrix} \bar{a}_x \bullet \bar{a}_\rho & \bar{a}_x \bullet \bar{a}_\theta & \bar{a}_z \bullet \bar{a}_z \\ \bar{a}_y \bullet \bar{a}_\rho & \bar{a}_y \bullet \bar{a}_\theta & \bar{a}_y \bullet \bar{a}_z \\ \bar{a}_z \bullet \bar{a}_\rho & \bar{a}_z \bullet \bar{a}_\theta & \bar{a}_z \bullet \bar{a}_z \end{bmatrix}$$

(c)

In spherical system:

$$\bar{a}_x = \sin\theta \cos\phi \bar{a}_r + \cos\theta \cos\phi \bar{a}_\theta - \sin\phi \bar{a}_\phi.$$

$$\bar{a}_y = \sin\theta \sin\phi \bar{a}_r + \cos\theta \sin\phi \bar{a}_\theta - \cos\phi \bar{a}_\phi.$$

$$\bar{a}_z = \cos\theta \bar{a}_r - \sin\theta \bar{a}_\theta.$$

Hence,

$$\bar{a}_x \bullet \bar{a}_r = \sin\theta \cos\phi;$$



$$\bar{a}_x \bullet \bar{a}_\theta = \cos\theta \cos\phi;$$

$$\bar{a}_y \bullet \bar{a}_r = \sin\theta \sin\phi;$$

$$\bar{a}_y \bullet \bar{a}_\theta = \cos\theta \sin\phi;$$

$$\bar{a}_z \bullet \bar{a}_r = \cos\theta;$$

$$\bar{a}_z \bullet \bar{a}_\theta = -\sin\theta;$$

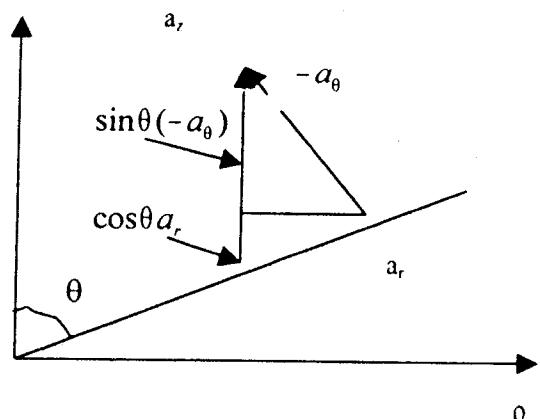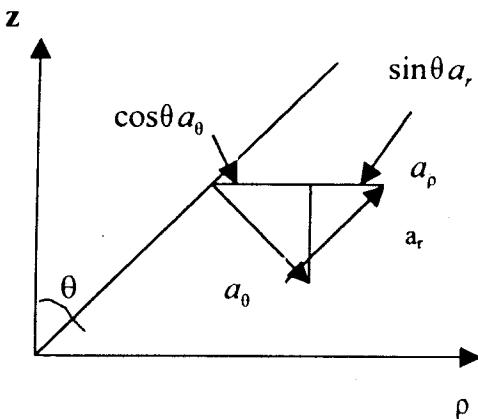

$$\begin{bmatrix} \bar{a}_\rho \\ \bar{a}_\phi \\ \bar{a}_z \end{bmatrix} = \begin{bmatrix} \sin \theta & \cos \theta & 0 \\ 0 & 0 & 1 \\ \cos \theta & -\sin \theta & 0 \end{bmatrix} \begin{bmatrix} \bar{a}_r \\ \bar{a}_\theta \\ \bar{a}_z \end{bmatrix}$$

Prob. 2.10 (a)

$$\begin{bmatrix} H_\rho \\ H_\phi \\ H_z \end{bmatrix} = \begin{bmatrix} \cos \phi & \sin \phi & 0 \\ -\sin \phi & \cos \phi & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} xy^2 z \\ x^2 yz \\ xyz^2 \end{bmatrix}$$

$$H_\rho = xy^2 z \cos \phi + x^2 yz \sin \phi = \rho^3 z \cos^2 \phi \sin^2 \phi + \rho^3 z \cos^2 \phi \sin^2 \phi \\ = \frac{1}{2} \rho^3 z \sin^2 2\phi$$

$$H_\phi = -xy^2 z \sin \phi + x^2 yz \cos \phi = -\rho^3 z \cos \phi \sin^3 \phi + \rho^3 z \cos \phi \sin \phi \\ = \rho^3 z \cos \phi \sin \phi \cos 2\phi.$$

$$H_z = xyz^2 = \rho^2 z^2 \sin \phi \cos \phi.$$

$$\underline{\underline{H}} = \frac{1}{2} \rho^3 z \sin^2 2\phi \bar{a}_\rho + \frac{1}{2} \rho^3 z \sin 2\phi \cos 2\phi \bar{a}_\phi + \frac{1}{2} \rho^3 z \sin 2\phi \bar{a}_z.$$

$$\begin{bmatrix} H_r \\ H_\theta \\ H_\phi \end{bmatrix} = \begin{bmatrix} \sin \theta \cos \phi & \sin \theta \sin \phi & \cos \theta \\ \cos \theta \cos \phi & \cos \theta \sin \phi & -\sin \theta \\ -\sin \phi & \cos \phi & 0 \end{bmatrix} \begin{bmatrix} xy^2 z \\ x^2 yz \\ xyz^2 \end{bmatrix}$$

$$x = r \sin \theta \cos \phi, \quad y = r \sin \theta \sin \phi, \quad z = r \cos \theta.$$

$$\begin{aligned}
 H_r &= xyz[y \sin \theta \cos \phi + x \sin \theta \sin \phi + z \cos \theta \\
 &= r^3 \sin^2 \theta \cos \theta \sin \phi [r \sin^2 \theta \sin \phi \cos \phi + r \sin^2 \theta \sin \phi \cos \phi + r \cos^2 \theta] \\
 H_\theta &= xyz[y \cos \theta \cos \phi + x \cos \theta \sin \phi - z \sin \theta] \\
 &= r^3 \sin^2 \theta \cos \theta \sin \phi \cos \phi [r \sin \theta \cos \theta \sin \phi \cos \phi + r \sin \theta \cos \theta \sin \phi \cos \phi - r \cos \theta \sin \theta] \\
 H_\phi &= xyz[-y \sin \phi + x \cos \phi] \\
 &= r^3 \sin^2 \theta \cos \theta \sin \phi \cos \phi [-r \sin \theta \sin^2 \phi + r \sin \theta \cos^2 \phi] \\
 &= r^3 \sin^3 \theta \cos \theta \sin \phi \cos 2\phi. \\
 \bar{H} &= r^3 \sin^2 \theta \cos \theta \sin \phi \cos \phi [(\sin^2 \theta \sin 2\phi + \cos^2 \theta) \bar{a}_r + \\
 &\quad (\sin \theta \cos \theta \sin 2\phi - \cos \theta \sin \theta) \bar{a}_\theta + \sin \theta \cos 2\phi \bar{a}_\phi].
 \end{aligned}$$

(b)

$$\text{At } (3, -4, 5), \bar{H}(x, y, z) = -60(-4, 3, 5)$$

$$|\bar{H}(x, y, z)| = 424.3$$

This will help check $H(\rho, \phi, z)$ and $H(r, \theta, \phi)$

$$\begin{aligned}
 \rho &= 5, z = 5, \phi = 360^\circ - \tan^{-1} \frac{4}{3} = 306.87^\circ \\
 \bar{H} &= \frac{I}{2}(125)(5)(-0.96)\bar{a}_\rho + \frac{I}{2}(125)(5)(-0.90)(-0.277)\bar{a}_\phi + \frac{I}{2}(25)(5)(-0.96)\bar{a}_z \\
 &= \underline{\underline{288\bar{a}_\rho + 84\bar{a}_\phi - 300\bar{a}_z}}
 \end{aligned}$$

Spherical,

$$\begin{aligned}
 r &= \sqrt{50} = 5\sqrt{2}; \quad \sin \theta = \frac{5}{5\sqrt{2}} = \frac{1}{\sqrt{2}}; \quad \cos \theta = \frac{5}{5\sqrt{2}} = \frac{1}{\sqrt{2}}. \\
 &\quad \& \quad \sin \phi = -\frac{4}{5}, \quad \cos \phi = \frac{3}{5}.
 \end{aligned}$$

$$\begin{aligned}
 \therefore \bar{H} &= 2500\left(\frac{1}{2}\right)\left(\frac{1}{\sqrt{2}}\right)\left(-\frac{12}{25}\right)\left[\left\{\frac{1}{2} * 2\left(-\frac{12}{28}\right) + \frac{1}{2}\right\}\bar{a}_r + \left\{\frac{1}{2} * 2\left(-\frac{12}{25}\right) - \frac{1}{2}\right\}\bar{a}_\theta + \frac{1}{\sqrt{2}}\left\{\frac{9}{12} - \frac{16}{25}\right\}\bar{a}_\phi\right] \\
 &= \underline{\underline{-8.485\bar{a}_r + 415.8\bar{a}_\theta + 84\bar{a}_\phi}}.
 \end{aligned}$$

Prob 2.11 (a)

$$\begin{bmatrix} A_x \\ A_y \\ A_z \end{bmatrix} = \begin{bmatrix} \cos \phi & -\sin \phi & 0 \\ \sin \phi & \cos \phi & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \rho \cos \phi \\ 0 \\ \rho z^2 \sin \phi \end{bmatrix}$$

$$A_x = \rho \cos^2 \phi = \sqrt{x^2 + y^2} \frac{x^2}{x^2 + y^2} = \frac{x^2}{\sqrt{x^2 + y^2}}$$

$$A_y = \rho \sin \phi \cos \phi = \sqrt{x^2 + y^2} \frac{xy}{x^2 + y^2} = \frac{xy}{\sqrt{x^2 + y^2}}$$

$$A_z = \frac{1}{\sqrt{x^2 + y^2}} [x^2 \bar{a}_x + xy \bar{a}_y + yz \bar{a}_z].$$

At (3, -4, 0) x=3, y=-4, z=0;

$$\bar{A} = \frac{1}{5} [9 \bar{a}_x - 12 \bar{a}_y].$$

$$\boxed{\bar{A}} = 3$$

$$(b) \quad \begin{bmatrix} A_r \\ A_\theta \\ A_\phi \end{bmatrix} = \begin{bmatrix} \sin \theta \cos \phi & \sin \theta \sin \phi & \cos \theta \\ \cos \phi \cos \phi & \cos \theta \sin \phi & -\sin \theta \\ -\sin \phi & \cos \phi & 0 \end{bmatrix} \begin{bmatrix} \frac{x^2}{\rho} \\ \frac{xy}{\rho} \\ \frac{yz}{\rho} \end{bmatrix}$$

$$x = r \sin \theta \cos \phi, \quad y = r \sin \theta \sin \phi, \quad z = r \cos \theta, \quad \rho = r \sin \theta.$$

$$\begin{aligned} A_r &= \frac{r^2 \sin^2 \theta \cos^2 \phi}{r \sin \theta} \sin \theta \cos \phi + \frac{r^2 \sin^2 \theta \cos \phi \sin \phi}{r \sin \theta} \sin \theta \sin \phi + \\ &\quad \frac{r^3 \sin \theta \cos^2 \phi}{r \sin \theta} \sin \phi \cos \theta \\ &= r \sin^2 \theta \cos \phi + r^2 \cos^3 \theta \sin \theta \end{aligned}$$

$$\begin{aligned} A_\theta &= r \sin \theta \cos^2 \phi \cos \theta \cos \phi + r \sin \theta \cos \phi \sin \phi \cos \theta \sin \phi - r^2 \cos^2 \theta \sin \phi \sin \theta \\ &= r \sin \theta \cos \theta \cos \phi - r^2 \sin \theta \cos^2 \sin \phi \\ &= r \sin \theta \cos \theta [\cos \phi - r \cos \theta \sin \phi] \end{aligned}$$

$$A_\phi = -r \sin \theta \cos^2 \phi \sin \phi + r \sin \theta \cos \phi \sin \phi \cos \phi = 0.$$

$$\bar{A} = r[\sin^2 \theta \cos \phi + r \cos^3 \theta \sin \phi] \bar{a}_r + r \sin \theta \cos \theta [\cos \phi - r \cos \theta \sin \phi] \bar{a}_\theta.$$

At $(3 - 4, 0)$, $r = 5$, $\theta = \pi / 2$, $\phi = 306.83$

$$\cos\phi = 3/5, \quad \sin\phi = -4/5.$$

$$\bar{A} = 5[1^2 * \frac{3}{5} + 5(0)(-4/5)]\bar{a}_r + 5(1)(0)a_\theta$$

$$= 3\bar{a}_r.$$

$$\boxed{\bar{A}} = 3.$$

Prob 2.12

$$\begin{aligned} \begin{bmatrix} A_x \\ A_y \\ A_z \end{bmatrix} &= \begin{bmatrix} \cos\phi & -\sin\phi & 0 \\ \sin\phi & \cos\phi & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} A_\rho \\ A_\theta \\ A_\phi \end{bmatrix} \\ &= \begin{bmatrix} \frac{x}{\sqrt{x^2 + y^2}} & -\frac{y}{\sqrt{x^2 + y^2}} & 0 \\ \frac{y}{\sqrt{x^2 + y^2}} & \frac{x}{\sqrt{x^2 + y^2}} & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} A_\rho \\ A_\theta \\ A_\phi \end{bmatrix} \end{aligned}$$

$$\begin{bmatrix} A_x \\ A_y \\ A_z \end{bmatrix} = \begin{bmatrix} \sin\theta\cos\phi & \cos\theta\cos\phi - \sin\phi & 0 \\ \sin\theta\sin\phi & \cos\theta\sin\phi & \cos\phi \\ \cos\theta & -\sin\theta & 0 \end{bmatrix} \begin{bmatrix} A_r \\ A_\theta \\ A_\phi \end{bmatrix}$$

$$= \begin{bmatrix} \frac{x}{\sqrt{x^2 + y^2 + z^2}} & \frac{xz}{\sqrt{x^2 + y^2}\sqrt{x^2 + y^2 + z^2}} & \frac{-y}{\sqrt{x^2 + y^2}} \\ \frac{y}{\sqrt{x^2 + y^2 + z^2}} & \frac{yz}{\sqrt{x^2 + y^2}\sqrt{x^2 + y^2 + z^2}} & \frac{x}{\sqrt{x^2 + y^2}} \\ \frac{z}{\sqrt{x^2 + y^2 + z^2}} & -\frac{\sqrt{x^2 + y^2}}{\sqrt{x^2 + y^2 + z^2}} & 0 \end{bmatrix} \begin{bmatrix} A_r \\ A_\theta \\ A_\phi \end{bmatrix}$$

Prob 2.13 (a) Using the results in Prob.2.9,

$$A_r = \rho z \sin\phi = r^2 \sin\theta \cos\theta \sin\phi$$

$$A_\theta = 3\rho \cos\phi = 3r \sin\theta \cos\phi$$

$$A_z = \rho \cos\phi \sin\phi = r \sin\theta \cos\phi \sin\phi$$

Hence,

$$\begin{bmatrix} A_r \\ A_\theta \\ A_z \end{bmatrix} = \begin{bmatrix} \sin\theta & 0 & \cos\theta \\ \cos\theta & 0 & -\sin\theta \\ 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} r^2 \sin\theta \cos\theta \sin\phi \\ 3r \sin\theta \cos\phi \\ r \sin\theta \cos\phi \sin\phi \end{bmatrix}$$

$$A(r, \theta, \phi) = r \sin\theta \left[\sin\phi \cos\theta (r \sin\theta + \cos\phi) a_r + \sin\phi (r \cos^2\theta - \sin\theta \cos\phi) a_\theta + 3 \cos\phi a_z \right]$$

At $(10, \pi/2, 3\pi/4)$, $r = 10, \theta = \pi/2, \phi = 3\pi/4$

$$\bar{A} = 10(0a_r + 0.5a_\theta - \frac{3}{\sqrt{2}}a_z) = \underline{\underline{5a_\theta - 21.21a_z}}$$

$$(b) \quad B_r = r^2 = (\rho^2 + z^2), \quad B_\theta = 0, \quad B_z = \sin\theta = \frac{\rho}{\sqrt{\rho^2 + z^2}}$$

$$\begin{bmatrix} B_\rho \\ B_\phi \\ B_z \end{bmatrix} = \begin{bmatrix} \sin\theta & \cos\theta & 0 \\ 0 & 0 & 1 \\ \cos\theta & -\sin\theta & 0 \end{bmatrix} \begin{bmatrix} B_r \\ B_\theta \\ B_z \end{bmatrix}$$

$$B(\rho, \phi, z) = \sqrt{\rho^2 + z^2} \left(\rho a_\rho + \frac{\rho}{\rho^2 + z^2} a_\phi + z a_z \right)$$

At $(2, \pi/6, 1)$, $\rho = 2, \phi = \pi/6, z = 1$

$$B = \sqrt{5}(2a_\rho + 0.4a_\phi + a_z) = \underline{\underline{4.472a_\rho + 0.8944a_\phi + 2.236a_z}}$$

Prob 2.14

$$(a) \quad d = \sqrt{(6-2)^2 + (-1-1)^2 + (2-5)^2} = \sqrt{29} = \underline{\underline{5.385}}$$

$$(b) \quad d^2 = 3^2 + 5^2 - 2(3)(5)\cos\pi + (-1-5)^2 = 100$$

$$d = \sqrt{100} = \underline{\underline{10}}$$

(c)

$$d^2 = 10^2 + 5^2 - 2(10)(5) \cos \frac{\pi}{4} \cos \frac{\pi}{6}$$

$$d^2 = (10)(5) \sin \frac{\pi}{4} \sin \frac{\pi}{6} \cos 7 \frac{\pi}{4} - \frac{3\pi}{4}$$

$$d = \sqrt{99.12} = \underline{9.956}.$$

Prob 2.15

- (a) An infinite line parallel to the z-axis.
- (b) Point (2,-1,10).
- (c) A circle of radius $r \sin \theta = 5$, i.e. the intersection of a cone and a sphere.
- (d) An infinite line parallel to the z-axis.
- (e) A semi-infinite line parallel to the x-y plane.
- (f) A semi-circle of radius 5 in the x-y plane.

Prob.2.16At $T(2,3,-4)$

$$\theta = \tan^{-1} \sqrt{x^2 + y^2} = \tan^{-1} \frac{\sqrt{13}}{-4} = 137.97$$

$$\cos \theta = \frac{-4}{\sqrt{29}} = -0.7428, \sin \theta = \frac{\sqrt{13}}{\sqrt{29}} = 0.6695$$

$$\phi = \tan^{-1} \frac{y}{x} = \tan^{-1} \frac{3}{2} = 56.31$$

$$\cos \phi = \frac{2}{\sqrt{13}}, \sin \phi = \frac{3}{\sqrt{13}}$$

$$\bar{a}_z = \cos \theta \bar{a}_r - \sin \theta \bar{a}_{\theta} = \underline{-0.7428 \bar{a}_r - 0.6695 \bar{a}_{\theta}}.$$

$$\bar{a}_r = \sin \theta \cos \phi \bar{a}_x + \sin \theta \sin \phi \bar{a}_y + \cos \theta \bar{a}_z.$$

$$= \underline{0.3714 \bar{a}_x + 0.5571 \bar{a}_y - 0.7428 \bar{a}_z}.$$

Prob.2.17

At $P(0,2,-5)$, $\phi = 90^\circ$;

$$\begin{bmatrix} B_x \\ B_y \\ B_z \end{bmatrix} = \begin{bmatrix} \cos\phi & -\sin\phi & 0 \\ \sin\phi & \cos\phi & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} B_\rho \\ B_\phi \\ B_z \end{bmatrix}$$

$$= \begin{bmatrix} 0 & -1 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} -5 \\ 1 \\ -3 \end{bmatrix}$$

$$\bar{B} = -\bar{a}_x - 5\bar{a}_y - 3\bar{a}_z$$

$$(a) \bar{A} + \bar{B} = (2,4,10) + (-1,-5,-3)$$

$$= \underline{\bar{a}_x} - \underline{\bar{a}_y} + \underline{7\bar{a}_z}.$$

$$(b) \cos\theta_{AB} = \frac{\bar{A} \cdot \bar{B}}{\|\bar{A}\| \|\bar{B}\|} = \frac{-52}{\sqrt{4200}}$$

$$\theta_{AB} = \cos^{-1}\left(\frac{-52}{\sqrt{4200}}\right) = \underline{143.26^\circ}.$$

$$(c) A_B = \bar{A} \cdot \bar{a}_B = \frac{\bar{A} \cdot \bar{B}}{B} = -\frac{52}{\sqrt{35}} = \underline{-8.789}.$$

Prob. 2.18

At $P(8, 30^\circ, 60^\circ) = P(r, \theta, \phi)$,

$$x = r \sin\theta \cos\phi = 8 \sin 30^\circ \cos 60^\circ = 2.$$

$$y = r \sin\theta \sin\phi = 8 \sin 30^\circ \sin 60^\circ = 2\sqrt{3}$$

$$z = r \cos\theta = 8 \left(\frac{1}{2}\sqrt{3}\right) = 4\sqrt{3}.$$

$$\bar{G} = 14\bar{a}_x + 8\sqrt{3}\bar{a}_y + (48 + 24)\bar{a}_z = (14, 13.86, 72);$$

$$\bar{a}_\phi = -\sin\phi \bar{a}_x + \cos\phi \bar{a}_y = -\frac{\sqrt{3}}{2}\bar{a}_x + \frac{1}{2}\bar{a}_y;$$

$$G_\phi = (\bar{G} \cdot \bar{a}_\phi) \bar{a}_\phi = (-7\sqrt{3} + 4\sqrt{3}) \frac{1}{2}(-\sqrt{3}\bar{a}_x + \bar{a}_y)$$

$$= \underline{4.5\bar{a}_x - 2.598\bar{a}_y}.$$

Prob. 2.19

$$(a) \quad J_z = (J \bullet \bar{a}_z) \bar{a}_z.$$

At $(2, \pi/2, 3\pi/2)$, $\bar{a}_z = \cos\theta \bar{a}_r - \sin\theta \bar{a}_\theta = -\bar{a}_\theta$.

$$\bar{J}_z = -\cos 2\theta \sin \phi \bar{a}_\theta = -\cos \pi \sin(3\pi/2) \bar{a}_\theta = -\bar{a}_\theta.$$

$$(b) \quad \bar{J}_\theta = \tan \frac{\theta}{2} \ln r \bar{a}_\phi = \tan \frac{\pi}{4} \ln 2 \bar{a}_\phi = \ln 2 \bar{a}_\phi = 0.6931 \bar{a}_\phi.$$

$$(c) \quad \bar{J}_r = \bar{J} - \bar{J}_n = \bar{J} - \bar{J}_r = -\bar{a}_\theta + \ln 2 \bar{a}_\phi = -\bar{a}_\theta + \underline{\underline{0.6931 \bar{a}_\phi}}.$$

$$(d) \quad \bar{J}_P = (\bar{J} \bullet \bar{a}_x) \bar{a}_x$$

$$\bar{a}_x = \sin\theta \cos\phi \bar{a}_r + \cos\theta \cos\phi \bar{a}_\theta - \sin\phi \bar{a}_\phi = \bar{a}_\phi.$$

At $(2, \pi/2, 3\pi/2)$,

$$\bar{J}_P = \underline{\underline{0.6931 \bar{a}_\phi}}.$$

Prob 2.20

$$\text{At } P, \quad \rho = 2, \phi = 30^\circ, \quad z = -1$$

$$\bar{H} = 10 \sin 30 \bar{a}_\rho + 2 \cos 30^\circ \bar{a}_\phi - 4 \bar{a}_z.$$

$$= 5 \bar{a}_\rho + 1.732 \bar{a}_\phi - 4 \bar{a}_z.$$

$$\bar{a}_n = \frac{(5, 1.732, -4)}{\sqrt{5^2 + 1.732^2 + 4^2}} = \underline{\underline{0.7538 \bar{a}_\rho + 0.2611 \bar{a}_\phi - 0.603 \bar{a}_z}}.$$

$$(b) \quad H_x = H_\rho \cos\phi - H_z \sin\phi = 5\rho \sin\phi \cos\phi - \rho z \cos\phi \sin\phi \\ \text{or } P \text{ at } \rho = 5, \phi = 30^\circ, z = 1;$$

$$\bar{H}_x = H_x \bar{a}_x = (25 \sin 30^\circ \cos 30^\circ + 5 \sin 30^\circ \cos 30^\circ) \bar{a}_x.$$

$$= \underline{\underline{13 \bar{a}_x}}$$

$$(c) \text{ Normal to } \rho = 2 \text{ is } \bar{H}_n = \bar{H}_\rho \bar{a}_\rho;$$

$$\text{i.e. } \bar{H}_n = \underline{\underline{0.7538 \bar{a}_\rho}}.$$

$$(d) \text{ Tangential to } \phi = 30^\circ.$$

$$H_t = H_\phi \bar{a}_x + H_z \bar{a}_z = \underline{\underline{0.7538 \bar{a}_x - 0.603 \bar{a}_z}}$$

Prob.2.21

$$(a) \text{ At } T, x = 3, y = -4, z = 1, \rho = 5, \cos\phi = -\frac{3}{5}$$

$$\bar{A} = 0\bar{a}_\rho - 5(1)(-\frac{3}{5})\bar{a}_\phi + 25(1)\bar{a}_z$$

$$= \underline{\underline{3\bar{a}_\phi + 25\bar{a}_z}}$$

$$r = \sqrt{26}, \quad \sin\theta = \frac{5}{\sqrt{26}}, \quad \cos\theta = \frac{1}{\sqrt{26}}$$

$$\bar{B} = 26(-\frac{3}{5})\bar{a}_r + 2(\sqrt{26}) \frac{5}{\sqrt{26}}\bar{a}_\phi$$

$$= \underline{\underline{-15.6\bar{a}_r + 10\bar{a}_\phi}}$$

(b) In cylindrical coordinates,

$$\begin{bmatrix} B_\rho \\ B_\phi \\ B_z \end{bmatrix} = \begin{bmatrix} \sin\theta & \cos\theta & 0 \\ 0 & 0 & 1 \\ \cos\theta & -\sin\theta & 0 \end{bmatrix} \begin{bmatrix} -15.6 \\ 0 \\ 10 \end{bmatrix}$$

$$B_\rho = 15.6 \sin\theta = 26(-\frac{3}{5})(\frac{5}{\sqrt{26}}) = 15.3$$

$$B_\phi = 10, \quad B_z = 15.6 \cos\theta = -3.059$$

$$\bar{B}(\rho, \phi, z) = (-15.3, 10, -3.059)$$

$$\bar{A}_B = (\bar{A} \bullet \bar{a}_B) \bar{a}_B = (\bar{A} \bullet \bar{B}) \bar{B} \frac{1}{|\bar{B}|^2} = \frac{(30 - 76.485)(-15.3, 10, -3.059)}{343.36}$$

$$= \underline{\underline{2.071\bar{a}_\rho - 1.354\bar{a}_\phi + 0.4141\bar{a}_z.}}$$

(c) In spherical coordinates,

$$\begin{bmatrix} A_r \\ A_\theta \\ A_\phi \end{bmatrix} = \begin{bmatrix} \sin\theta & 0 & \cos\theta \\ \cos\theta & 0 & -\sin\theta \\ 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} 0 \\ 3 \\ 25 \end{bmatrix}$$

$$A_r = 25 \cos\theta = \frac{25}{\sqrt{26}} = 4.903$$

$$A_\theta = 25 \sin\theta = -25 \left(\frac{5}{\sqrt{26}} \right) = -24.51$$

$$A_\phi = 0.$$

$$\bar{A} \times \bar{B} = \begin{vmatrix} \bar{a}_r & \bar{a}_\theta & \bar{a}_\phi \\ 4.903 & -24.51 & 0 \\ -15.6 & 0 & 10 \end{vmatrix} = -245.1\bar{a}_r + 49.03\bar{a}_\theta - 382.43\bar{a}_\phi$$

$$\bar{a}_{Ax B} = \frac{\pm \bar{A} \times \bar{B}}{456.87} = \underline{\underline{(0.5365\bar{a}_r - 0.1073\bar{a}_\theta + 0.8371\bar{a}_\phi)}}$$

Prob 2.22

(a) For $(x, y, z) = (2, 3, 6)$,

$$r = \sqrt{x^2 + y^2 + z^2} = 7$$

$$x = r \cos\alpha \cos\alpha = \frac{x}{r} = \frac{-2}{7}, \alpha = 106.6^\circ$$

$$y = r \cos\beta \cos\beta = \frac{y}{r} = \frac{3}{7}, \beta = 64.6^\circ$$

$$z = r \cos\gamma \cos\gamma = \frac{z}{r} = \frac{6}{7}, \gamma = 31^\circ$$

Hence,

$$(r, \alpha, \beta, \gamma) = \underline{\underline{(7, 106.6^\circ, 64.6^\circ, 31^\circ)}}$$

(b) For $(\rho, \phi, z) = (4, 30^\circ, -3)$,

$$r = \sqrt{\rho^2 + z^2} = 5,$$

$$\cos y = \frac{z}{r} = \frac{-3}{5}, y = 126.9^\circ$$

$$\cos\alpha = \frac{x}{r} = \rho \frac{\cos\phi}{r} = \frac{4 \cos 30^\circ}{5}, \alpha = 46.15^\circ$$

$$\cos B = \frac{y}{r} = \frac{\rho \sin\phi}{r} = \frac{4}{5} \sin 30^\circ, B = 66.42^\circ$$

$$(r, \alpha, B, y) = \underline{\underline{(5, 46.15^\circ, 66.42^\circ, 126.9^\circ)}}$$

(c) For $(r, \theta, \phi) = (3, 30^\circ, 60^\circ)$,

$$r = 3, y = \theta = 30^\circ,$$

$$\cos \alpha = \frac{x}{r} = \frac{r \sin \theta \cos \phi}{r} = \frac{1}{4}, \quad \alpha = 75.52^\circ,$$

$$\cos B = \frac{y}{r} = \sin \theta \sin \phi = 0.433, \quad B = 64.34^\circ,$$

$$(r, \alpha, B, y) = \underline{\underline{(3, 75.52^\circ, 64.34^\circ, 30^\circ)}}.$$

Prob 2.23

$$\bar{G} = \cos \theta \bar{a}_y + \frac{2r \cos \theta \sin \phi}{r \sin \theta} \bar{a}_y + (1 - \cos^2 \phi) \bar{a}_z$$

$$= \cos \phi \bar{a}_x + 2 \tan \theta \sin \phi \bar{a}_y + \sin \phi \bar{a}_z$$

$$\begin{pmatrix} G_r \\ G_\theta \\ G_\phi \end{pmatrix} = \begin{bmatrix} \sin \theta \cos \phi & \sin \theta \cos \phi & \cos \theta \\ \sin \theta \cos \phi & \cos \theta \sin \phi & -\sin \theta \\ -\sin \phi & \cos \phi & 0 \end{bmatrix} \begin{bmatrix} \cos^2 \phi \\ 2 \tan \theta \sin \phi \\ \sin^2 \phi \end{bmatrix}$$

$$G_r = \sin \theta \cos \phi + 2 \cos \theta \sin^2 \phi + \cos \theta \sin^2 \phi$$

$$= \sin \theta \cos^2 \phi + 3 \cos \theta \sin^2 \phi$$

$$G_\theta = \cos \theta \cos^2 \phi + 2 \tan \theta \cos \theta \sin^2 \phi - \sin \theta \sin^2 \phi$$

$$G_\phi = -\sin \phi \cos^2 \phi + \sin^2 \phi \cos \phi = \sin \phi \cos \phi (\sin \phi - \cos \phi)$$

$$\bar{G} = [\sin \theta \cos^2 \phi + 3 \cos \theta \sin^2 \phi] \bar{a}_x$$

$$+ [\cos \theta \cos^2 \phi + 2 \tan \theta \cos \theta \sin^2 \phi - \sin \theta \sin^2 \phi] \bar{a}_\theta$$

$$+ \underline{\underline{\sin \phi \cos \phi (\cos \phi - \sin \phi) \bar{a}_\phi}}$$

CHAPTER 3

P. E. 3.1

$$(a) DH = \int_{\phi=45^\circ}^{\phi=60^\circ} r \sin \phi \, d\phi \Big|_{r=3, \theta=90^\circ} = 3(1) \left[\frac{\pi}{3} - \frac{\pi}{4} \right] = \frac{\pi}{4} = \underline{\underline{0.7854}}.$$

$$(b) FG = \int_{\theta=60^\circ}^{\theta=90^\circ} r d\theta \Big|_{r=5} = 5 \left(\frac{\pi}{2} - \frac{\pi}{3} \right) = \frac{5\pi}{6} = \underline{\underline{2.618}}.$$

(c)

$$\begin{aligned} AEHD &= \int_{\theta=60^\circ}^{\theta=90^\circ} \int_{\phi=45^\circ}^{\phi=60^\circ} r^2 \sin \theta \, d\theta \, d\phi \Big|_{r=3} = 9(-\cos \theta) \Big|_{\theta=60^\circ}^{\theta=90^\circ} \Big|_{\phi=45^\circ}^{\phi=60^\circ} \\ &= 9 \left(\frac{1}{2} \right) \left(\frac{\pi}{12} \right) = \frac{3\pi}{8} = \underline{\underline{1.178}}. \end{aligned}$$


(d)

$$ABCD = \int_{r=3}^{r=5} \int_{\theta=60^\circ}^{\theta=90^\circ} r d\theta dr = \frac{r^2}{2} \Big|_{r=3}^{r=5} \left(\frac{\pi}{2} - \frac{\pi}{3} \right) = \frac{4\pi}{3} = \underline{\underline{4.189}}.$$

(e)

$$\begin{aligned} \text{Volume} &= \int_{r=3}^{r=5} \int_{\phi=45^\circ}^{\phi=60^\circ} \int_{\theta=60^\circ}^{\theta=90^\circ} r^2 \sin \theta \, d\theta \, d\phi \, d\phi = \frac{r^3}{3} \Big|_{r=3}^{r=5} (-\cos \theta) \Big|_{\theta=60^\circ}^{\theta=90^\circ} \Big|_{\phi=45^\circ}^{\phi=60^\circ} = \frac{1}{3} (98) \left(\frac{1}{2} \right) \frac{\pi}{12} \\ &= \frac{49\pi}{36} = \underline{\underline{4.276}}. \end{aligned}$$

P.E. 3.2

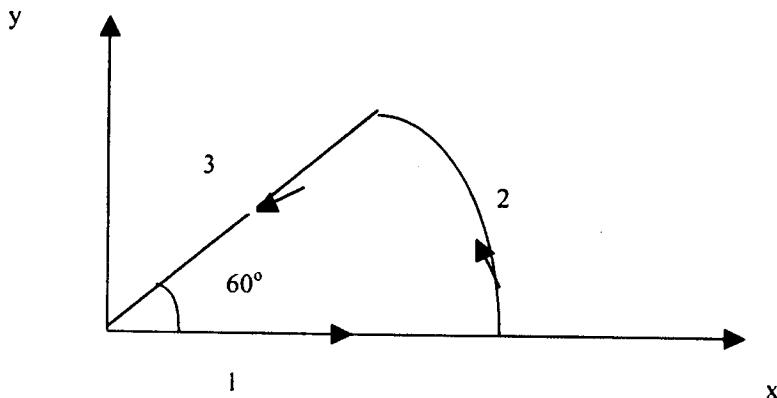

$$\oint_L \bar{A} \bullet d\bar{l} = (\int_1 + \int_2 + \int_3) \bar{A} \bullet d\bar{l} = C_1 + C_2 + C_3$$

$$\text{Along (1), } C_1 = \int_0^2 \rho \cos\phi \, d\rho \Big|_{\phi=0} = \frac{\rho^2}{2} \Big|_0^2 = 2.$$

$$\text{Along (2), } d\bar{l} = \rho d\phi \bar{a}_\phi, \bar{A} \bullet d\bar{l} = 0, \quad C_2 = 0$$

$$\text{Along (3), } C_3 = \int_2^0 \rho \cos\phi \, d\rho \Big|_{\phi=60^\circ} = \frac{\rho^2}{2} \Big|_0^1 \left(\frac{1}{2}\right) = -1$$

$$\oint_L \bar{A} \bullet d\bar{l} = C_1 + C_2 + C_3 = 2 + 0 - 1 = \underline{\underline{1}}$$

P.E. 3.3

$$(a) \quad \nabla U = \frac{\partial U}{\partial x} \bar{a}_x + \frac{\partial U}{\partial y} \bar{a}_y + \frac{\partial U}{\partial z} \bar{a}_z \\ = \underline{\underline{y(2x+z)\bar{a}_x + x(x+z)\bar{a}_y + xy\bar{a}_z}}$$

$$(b) \quad \nabla V = \frac{\partial V}{\partial \rho} \bar{a}_\rho + \frac{1}{\rho} \frac{\partial V}{\partial \phi} \bar{a}_\phi + \frac{\partial V}{\partial z} \bar{a}_z \\ = \underline{\underline{(z\sin\phi + 2\rho)\bar{a}_\rho + (z\cos\phi - \frac{z}{\rho}\sin 2\phi)\bar{a}_\phi + (\rho\cos\phi + 2z\cos^2\phi)\bar{a}_z}}$$

(c)

$$\nabla f = \frac{\partial f}{\partial r} \bar{a}_r + \frac{1}{r} \frac{\partial f}{\partial \theta} \bar{a}_\theta + \frac{1}{r \sin\theta} \frac{\partial f}{\partial \phi} \bar{a}_\phi \\ = \underline{\underline{(\cos\theta\sin\phi + 2r\phi)\bar{a}_r - \sin\theta\sin\phi \ln r \bar{a}_\theta}} \\ + \underline{\underline{(\cos\theta\cos\phi \ln r + r \operatorname{cosec}\theta)\bar{a}_\phi}}$$

P.E. 3.4

$$\nabla \Phi = (x+y)\bar{a}_x + (x+z)\bar{a}_y + (y+z)\bar{a}_z$$

$$\text{At (1,2,3)} \quad \nabla \Phi = \underline{\underline{(5,4,3)}}$$

$$\nabla \Phi \bullet \bar{a}_1 = (5,4,3) \bullet \frac{(2,2,1)}{3} = \frac{21}{3} = \underline{\underline{7}},$$

$$\text{where } (2,2,1) = (3,4,4) - (1,2,3)$$

P.E. 3.5

Let $f = x^2y + z - 3$, $g = x \log z - y^2 + 4$,

$$\nabla f = 2xy\bar{a}_x + x^2\bar{a}_y + \bar{a}_z$$

$$\nabla g = \log z\bar{a}_x - 2y\bar{a}_y + \frac{x}{z}\bar{a}_z$$

At $P(-1, 2, 1)$,

$$\bar{n}_f = \pm \frac{\nabla f}{|\nabla f|} = \pm \frac{(-4\bar{a}_x + \bar{a}_y + \bar{a}_z)}{\sqrt{18}}$$

$$\cos\theta = \bar{n}_f \cdot \bar{n}_g = \pm \frac{(-5)}{\sqrt{18} \times 17}$$

$$\theta = \cos^{-1} \frac{5}{17.493} = 73.39^\circ$$

P.E. 3.6

$$(a) \nabla \cdot \bar{A} = \frac{\partial A_x}{\partial x} + \frac{\partial A_y}{\partial y} + \frac{\partial A_z}{\partial z} = 0 + 4 + 0 = \underline{\underline{4x}}$$

At $(1, -2, 3)$, $\nabla \cdot \bar{A} = \underline{\underline{4}}$.

(b)

$$\begin{aligned} \nabla \cdot \bar{B} &= \frac{1}{\rho} \frac{\partial}{\partial \rho} (\rho B_\rho) + \frac{1}{\rho} \frac{\partial B_\phi}{\partial \phi} + \frac{\partial B_z}{\partial \rho} \\ &= \frac{1}{\rho} 2\rho z \sin\phi - \frac{1}{\rho} 3\rho z^2 \sin\phi + 2z \sin\phi - 3z^2 \sin\phi \\ &= \underline{\underline{(2-3z)z \sin\phi}}. \end{aligned}$$

$$At (5, \frac{\pi}{2}, 1), \quad \nabla \cdot \bar{B} = (2-3)(1) = \underline{\underline{-1}}.$$

(c)

$$\begin{aligned} \nabla \cdot \bar{C} &= \frac{1}{r^2} \frac{\partial}{\partial r} (r^2 A_r) + \frac{1}{r \sin\theta} \frac{\partial}{\partial \theta} (A_\theta \sin\theta) + \frac{1}{r \sin\theta} \frac{\partial A_\phi}{\partial \phi} \\ &= \frac{1}{r^2} 6r^2 \cos\theta \cos\phi \\ &= \underline{\underline{6 \cos\theta \cos\phi}} \end{aligned}$$

$$At (1, \frac{\pi}{6}, \frac{\pi}{3}), \quad \nabla \cdot \bar{C} = 6 \cos \frac{\pi}{6} \cos \frac{\pi}{3} = \underline{\underline{2.598}}.$$

(c)

$$\nabla \times \bar{C} = \bar{a}_r \frac{1}{r \sin\theta} (r^{-1/2} \cos\theta - 0) + \frac{\bar{a}_\theta}{r} \left(-\frac{2r \cos\theta \sin\phi}{\sin\theta} - \frac{3}{2} r^{1/2} \right) + \frac{\bar{a}_\phi}{r} (0 - 2r \sin\theta \cos\phi)$$

$$= r^{-1/2} \cot\theta \bar{a}_r - \left(2\cot\theta \sin\phi + \frac{3}{2} r^{-1/2} \right) \bar{a}_\theta - 2\sin\theta \cot\phi \bar{a}_\phi$$

At $(1, \frac{\pi}{6}, \frac{\pi}{3})$, $\nabla \times C = \underline{1.732 \bar{a}_r - 4.5 \bar{a}_\theta - 0.5 \bar{a}_\phi}$

P.E. 3.9

$$\oint_L \bar{A} \bullet d\bar{l} = \int_S (\nabla \times \bar{A}) \bullet d\bar{S}$$

$$\text{But } (\nabla \times \bar{A}) = \sin\phi \bar{a}_z + \frac{z \cos\phi}{\rho} \bar{a}_\rho \text{ and } d\bar{S} = \rho d\phi d\rho \bar{a}_z$$

$$\int_S (\nabla \times \bar{A}) \bullet d\bar{S} = \iint \rho \sin\phi \, d\phi \, d\rho$$

$$= \frac{\rho}{2} \int_0^{\frac{\pi}{2}} (-\cos\phi) \Big|_0^{60^\circ} \, d\phi$$

$$= 2 \left(-\frac{1}{2} + 1 \right) = \underline{1.}$$

P.E. 3.10

$$\nabla \times \nabla V = \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ \frac{\partial V}{\partial x} & \frac{\partial V}{\partial y} & \frac{\partial V}{\partial z} \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \end{vmatrix} =$$

$$= \left(\frac{\partial^2 V}{\partial y \partial z} - \frac{\partial^2 V}{\partial y \partial z} \right) \bar{a}_x + \left(\frac{\partial^2 V}{\partial x \partial z} - \frac{\partial^2 V}{\partial z \partial x} \right) \bar{a}_y + \left(\frac{\partial^2 V}{\partial x \partial y} - \frac{\partial^2 V}{\partial y \partial x} \right) \bar{a}_z = 0$$

P.E. 3.11

(a)

$$\nabla^2 U = \frac{\partial}{\partial x} (2xy + yz) + \frac{\partial}{\partial x} (x^2 + xz) + \frac{\partial}{\partial x} (xy)$$

$$= \underline{2y}$$

(b)

$$\begin{aligned}
 \nabla^2 V &= \frac{1}{\rho} \frac{\partial}{\partial \rho} \rho(z \sin \phi + 2\rho) + \frac{1}{\rho^2} (-\rho z \sin \phi - 2z^2 \frac{\partial}{\partial \rho} \sin \phi \cos \phi) + \frac{\partial}{\partial z} (\rho \sin \phi + 2z \cos^2 \phi) \\
 &= \frac{1}{\rho} (z \sin \phi + 4\rho) - \frac{1}{\rho^2} (z \rho \sin \phi + 2z^2 \cos 2\phi) + 2 \cos^2 \phi. \\
 &= 4 + 2 \cos^2 \phi - \frac{2z^2}{\rho^2} \cos 2\phi.
 \end{aligned}$$

(c)

$$\begin{aligned}
 \nabla^2 f &= \frac{I}{r^2} \frac{\partial}{\partial r} \left[\frac{I}{r^2} \frac{I}{r} \cos \theta \sin \phi + 2r^2 \phi \right] + \frac{I}{r^2 \sin \theta} \frac{\partial}{\partial \theta} \left[-\sin^2 \theta \sin \phi \ln r \right] \\
 &\quad + \frac{I}{r^2 \sin^2 \theta} \left[-\cos \theta \sin \theta \ln r \right] \\
 &= \frac{I}{r^2} \cos \theta \sin \phi (I - 2 \ln r - \csc^2 \theta \ln r) + 6\theta
 \end{aligned}$$

P.E. 3.12

If \bar{B} is conservative, $\nabla \times \bar{B} = 0$ must be satisfied.

$$\nabla \times \bar{B} = \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ y + z \cos xz & x & x \cos xz \end{vmatrix}$$

$$= 0 \bar{a}_x + (\cos xz - xz \sin xz - \cos xz + xz \sin xz) \bar{a}_y + (I - I) \bar{a}_z = 0$$

Hence \bar{B} is a conservative field.

Since $\int_0^2 x dx = \frac{x^2}{2} \Big|_0^2 = 2$ and $\int_0^2 dx = 2$, we get

$$\int \bar{A} dv = 2(2)(2)(2) \bar{a}_x + (2)(2)(2) \bar{a}_y - (2)(2)(2) \bar{a}_z$$

$$= 16 \bar{a}_x + 8 \bar{a}_y - 8 \bar{a}_z$$

$$\begin{bmatrix} A_r \\ A_\theta \\ A_\phi \end{bmatrix} = \begin{bmatrix} \cos\phi & \sin\phi & 0 \\ -\sin\phi & \cos\phi & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 2xy \\ xz \\ -y \end{bmatrix}$$

$$A_r = 2xy \cos\phi + xz \sin\phi = 2\rho^2 \cos^3 \phi \sin\phi + \rho z \cos\phi \sin\phi$$

$$A_\theta = -2xy \sin\phi + xz \cos\phi = -2\rho^2 \cos\phi \sin^2 \phi + \rho z \cos^2 \phi$$

$$A_z = -y = -\rho \cos\phi$$

$$dv = \rho d\phi d\rho dz$$

$$\begin{aligned} \int \bar{A} dv &= \iiint 2\rho^3 \cos^3 \phi d(-\cos\phi) d\rho dz \bar{a}_r + \iiint \rho^2 z \cos\phi d(-\cos\phi) d\rho dz \bar{a}_\theta \\ &\quad - 2 \iiint \rho^3 \sin^2 \phi d(\sin\phi) d\rho dz \bar{a}_\phi + \iiint \rho^2 z \cos^2 \phi d\phi d\rho dz \bar{a}_z \\ &\quad - \iiint \rho^2 \cos\phi d\phi d\rho dz \bar{a}_z \end{aligned}$$

Since $\int_0^{2\pi} \cos\phi d\phi = 0$,

$$\begin{aligned} \int \bar{A} dv &= -2 \frac{\rho^4}{4} \Big|_0^3 \cos \frac{4}{4} \phi \Big|_0^{2\pi} z \Big|_0^3 \bar{a}_r - \frac{\rho^3}{3} \Big|_0^3 \frac{z^2}{2} \Big|_0^3 \frac{\cos^2 \phi}{2} \Big|_0^{2\pi} \bar{a}_\theta \\ &\quad - \frac{2\rho^4}{4} \Big|_0^3 z \Big|_0^3 \frac{\sin^3 \phi}{3} \Big|_0^{2\pi} \bar{a}_\phi + \frac{\rho^3}{3} \Big|_0^3 \frac{z^2}{2} \Big|_0^3 \left(\frac{1}{2} + \frac{1}{4} \sin 2\phi \right) \Big|_0^{2\pi} \bar{a}_z \\ &= 0 + 0 + 0 + (9) \left(\frac{25}{2} \right) \left(\frac{1}{2} \right) \bar{a}_\theta = \underline{\underline{56.25 \bar{a}_\theta}} \end{aligned}$$

(c)

$$\begin{bmatrix} A_r \\ A_\theta \\ A_\phi \end{bmatrix} = \begin{bmatrix} \sin\theta \cos\phi & \cos\theta \cos\phi & -\sin\theta \\ \sin\theta \sin\phi & \cos\theta \sin\phi & \cos\phi \\ \cos\theta & -\sin\theta & 0 \end{bmatrix} \begin{bmatrix} 2xy \\ xz \\ -y \end{bmatrix}$$

Prob 3.11

$$\bar{a} = \left(\frac{dV_x}{dt}, \frac{dV_y}{dt}, \frac{dV_z}{dt} \right) = 2.4 \bar{a}_z$$

$$\frac{dV_x}{dt} = 0 \quad \longrightarrow \quad V_x = A$$

$$\frac{dV_y}{dt} = 0 \quad \longrightarrow \quad V_y = B$$

$$\frac{dV_z}{dt} = 2.4 \quad \longrightarrow \quad V_z = 2.4t + C$$

At $t = 0$, $(V_x, V_y, V_z) = (-2, 0, 5)$. Hence,

$$A = -2, \quad B = 0, \quad C = 5$$

$$V_x = \frac{dx}{dt} = -2 \quad \longrightarrow \quad x = -2t + D$$

$$V_y = \frac{dy}{dt} = 0 \quad \longrightarrow \quad y = E$$

$$V_z = \frac{dt}{dt} = 2.4t + 5 \quad \longrightarrow \quad z = 1.2t^2 + 5t + F$$

At $t = 0$, $x = 0, y = 0, z = 0$. Hence, $D = 0 = E = F$

$$x = -2t, y = 0, z = 1.2t^2 + 5t$$

(a) At $t = 1$, $x = -2, y = 0, z = 6.2$. Thus the particle is at
 $(-2, 0, 6.2)$

(b) $\bar{V} = (V_x, V_y, V_z) = \underline{-2 \bar{a}_x + (2.4t + 5) \bar{a}_z}$ m/s

Prob 3.12

(a)

$$\begin{aligned} \bar{\nabla} U &= \frac{\partial U}{\partial x} \bar{a}_x + \frac{\partial U}{\partial y} \bar{a}_y + \frac{\partial U}{\partial z} \bar{a}_z \\ &= \underline{4z^2 \bar{a}_x + 3z \bar{a}_y + (8xz + 3y) \bar{a}_z} \end{aligned}$$

(b)

$$\begin{aligned} \bar{\nabla} T &= \frac{\partial T}{\partial \rho} \bar{a}_\rho + \frac{1}{\rho} \frac{\partial T}{\partial \phi} \bar{a}_\phi + \frac{\partial T}{\partial z} \bar{a}_z \\ &= \underline{5e^{-2z} \sin \phi \bar{a}_\rho + 5e^{-2z} \cos \phi \bar{a}_\phi - 10\rho e^{-2z} \sin \phi \bar{a}_z} \end{aligned}$$

$$\nabla S = 2\bar{a}_x + 6\bar{a}_y - \bar{a}_z \text{ and } \bar{a}_n = \frac{\nabla S}{|\nabla S|} = \frac{(2.6, -1)}{\sqrt{4 + 36 + 1}}$$

$$\bar{a}_n = \underline{\underline{0.3123\bar{a}_x + 0.937\bar{a}_y - 0.1562\bar{a}_z}}$$

Prob 3.15

$$\bar{\nabla} T = 2x\bar{a}_x + 2y\bar{a}_y - \bar{a}_z$$

At $(1,1,2)$, $\bar{\nabla} T = (2,2,-1)$. The mosquito should move in the direction of

$$\underline{\underline{2\bar{a}_x + 2\bar{a}_y - \bar{a}_z}}$$

Prob 3.16 (a)

$$\begin{aligned}\bar{\nabla} \cdot \bar{A} &= ye^{xy} + x \cos xy - 2x \cos zx \sin zx \\ \bar{\nabla} \times \bar{A} &= \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ e^{xy} & \sin xy & \cos^2 xz \end{vmatrix} \\ &= (0 - 0)\bar{a}_x + (0 + 2z \cos xz \sin xz)\bar{a}_y + (y \cos xy - xe^{xy})\bar{a}_z \\ &= \underline{\underline{z \sin 2xz\bar{a}_y + (y \cos xy - xe^{xy})\bar{a}_z}}.\end{aligned}$$

(b)

$$\begin{aligned}\nabla \cdot \bar{B} &= \frac{1}{\rho} \frac{\partial}{\partial \rho} (\rho^2 z^2 \cos \phi) + 0 + \sin^2 \phi \\ &= \underline{\underline{2z^2 \cos \phi + \sin^2 \phi}}\end{aligned}$$

$$\begin{aligned}\nabla \times \bar{B} &= \left(\frac{1}{\rho} \frac{\partial \bar{B}_z}{\partial \phi} - 0 \right) \bar{a}_\rho + \left(\frac{\partial \bar{B}_\rho}{\partial z} - \frac{\partial \bar{B}_z}{\partial \rho} \right) \bar{a}_\phi + \frac{1}{\rho} \left(0 - \frac{\partial \bar{B}_\phi}{\partial \rho} \right) \bar{a}_z \\ &= \frac{z \sin 2\phi}{\rho} \bar{a}_\rho + 2\rho z \cos \phi \bar{a}_\phi + z^2 \sin \phi \bar{a}_z\end{aligned}$$

(c)

$$\begin{aligned}\nabla \cdot \bar{C} &= \frac{1}{r^2} \frac{\partial}{\partial r} (r^3 \cos \theta) + \frac{1}{r \sin \theta} \frac{\partial}{\partial \theta} \left(-\frac{1}{r} \sin^2 \theta \right) + 0 \\ &= \underline{\underline{3 \cos \theta - \frac{2 \cos \theta}{r^2}}}\end{aligned}$$

$$\begin{aligned}\bar{\nabla} \times \bar{C} &= \frac{I}{r \sin \theta} \left[\frac{\partial}{\partial \theta} (2r^2 \sin^2 \theta) - 0 \right] \bar{a}_r + \frac{I}{r} \left[0 - \frac{\partial}{\partial r} (2r^3 \sin \theta) \right] \bar{a}_\theta \\ &\quad + \frac{I}{r} \left[\frac{\partial}{\partial r} (-\sin \theta) + r \sin \theta \right] \bar{a}_\phi \\ &= 4r \cos \theta \bar{a}_r - 6r \sin \theta \bar{a}_\theta + \sin \theta \bar{a}_\phi\end{aligned}$$

Prob 3.17 (a)

$$\nabla \times \bar{A} = \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ x^2 y & y^2 z & -2xz \end{vmatrix} = \underline{-y^2 \bar{a}_x + 2z \bar{a}_y - y^2 \bar{a}_z}.$$

$$\nabla \cdot \nabla \times \bar{A} = \underline{\underline{0}}$$

(b)

$$\begin{aligned}\nabla \times \bar{A} &= \left(\frac{I}{\rho} \frac{\partial A_z}{\partial \phi} - \frac{\partial A_\phi}{\partial z} \right) \bar{a}_\rho + \left(\frac{\partial A_\rho}{\partial z} - \frac{\partial A_z}{\partial \rho} \right) \bar{a}_\phi + \frac{I}{\rho} \left(\frac{\partial (\rho A_\phi)}{\partial \rho} - \frac{\partial A_\phi}{\partial \phi} \right) \bar{a}_z \\ &= (0 - 0) \bar{a}_\rho + (\rho^2 - 3z^2) \bar{a}_\phi + \frac{I}{\rho} (4\rho^3 - 0) \bar{a}_z \\ &= \underline{(\rho^2 - 3z^2) \bar{a}_\phi + 4\rho^2 \bar{a}_z}\end{aligned}$$

$$\nabla \cdot \nabla \times \bar{A} = \underline{\underline{0}}$$

(c)

$$\begin{aligned}\nabla \times \bar{A} &= \frac{I}{r \sin \theta} \frac{\partial}{\partial \theta} (-\sin \theta \cos \phi) \bar{a}_r + \left[\frac{I}{\sin \theta} \frac{\cos \phi}{r^2} - \frac{\partial}{\partial r} (r^{-1} \cos \theta) \right] \bar{a}_\theta + \frac{I}{r} (0 - 0) \bar{a}_\phi \\ &= \frac{-\cos \theta \cos \phi}{r \sin \theta} \bar{a}_r + \frac{I}{r} \left[\frac{\cos \phi}{r^2 \sin \theta} + r^{-2} \cos \theta \right] \bar{a}_\theta \\ &= \frac{-I}{r} \cot \theta \cos \phi \bar{a}_r + \frac{I}{r^3} \left(\frac{\cos \phi}{\sin \theta} + \cos \theta \right) \bar{a}_\theta\end{aligned}$$

$$\nabla \cdot \nabla \times \bar{A} = \underline{\underline{0}}$$

Prob 3.18

$$\bar{\nabla} \cdot \bar{H} = k \bar{\nabla} \cdot \bar{\nabla} T = k \bar{\nabla}^2 T$$

$$\bar{\nabla}^2 T = \frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} = 50 \sin \frac{\pi x}{2} \cosh \frac{\pi y}{2} \left(-\frac{\pi^2}{4} + \frac{\pi^2}{4} \right) = 0$$

$$\text{Hence, } \bar{\nabla} \cdot \bar{H} = 0$$

Prob 3.19

(a)

$$\begin{aligned}
 \nabla \bullet (V \bar{A}) &= \frac{\partial}{\partial x}(VA_x) + \frac{\partial}{\partial y}(VA_y) + \frac{\partial}{\partial z}(VA_z) \\
 &= (A_x \frac{\partial V}{\partial x} + V \frac{\partial A_x}{\partial x}) + (A_y \frac{\partial V}{\partial y} + V \frac{\partial A_y}{\partial y}) + (A_z \frac{\partial V}{\partial z} + V \frac{\partial A_z}{\partial z}) \\
 &= V(\frac{\partial A_x}{\partial x} + \frac{\partial A_y}{\partial y} + \frac{\partial A_z}{\partial z}) + A_x \frac{\partial V}{\partial x} + A_y \frac{\partial V}{\partial y} + A_z \frac{\partial V}{\partial z} \\
 &= V \nabla \bullet \bar{A} + \underline{\bar{A} \bullet \nabla V}
 \end{aligned}$$

(b)

$$\nabla \bullet A = 2 + 3 - 4 = 1; \quad \nabla V = yz \bar{a}_x + xz \bar{a}_y + xy \bar{a}_z$$

$$\begin{aligned}
 \nabla \bullet (V \bar{A}) &= V \nabla \bullet \bar{A} + \bar{A} \bullet \nabla V \\
 &= xyz + 2xyz + 3xyz - 4xyz = \underline{2xyz}
 \end{aligned}$$

Prob 3.20 (a)

$$\begin{aligned}
 \nabla \times V \bar{A} &= \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ VA_x & VA_y & VA_z \end{vmatrix} \\
 &= [\frac{\partial}{\partial y}(VA_z) - \frac{\partial}{\partial z}(VA_y)] \bar{a}_x + [\frac{\partial}{\partial z}(VA_x) - \frac{\partial}{\partial x}(VA_z)] \bar{a}_y \\
 &\quad + [\frac{\partial}{\partial x}(VA_y) - \frac{\partial}{\partial y}(VA_x)] \bar{a}_z \\
 &= [A_z \frac{\partial V}{\partial x} + V \frac{\partial A_z}{\partial x} - A_y \frac{\partial V}{\partial z} + V \frac{\partial A_y}{\partial z}] \bar{a}_x \\
 &\quad + [A_x \frac{\partial V}{\partial z} + V \frac{\partial A_x}{\partial z} - A_z \frac{\partial V}{\partial x} + V \frac{\partial A_z}{\partial x}] \bar{a}_y \\
 &\quad + [A_y \frac{\partial V}{\partial x} + V \frac{\partial A_y}{\partial x} - A_x \frac{\partial V}{\partial y} + V \frac{\partial A_x}{\partial y}] \bar{a}_z
 \end{aligned}$$

$$\begin{aligned}
 \nabla \times \phi \bar{a}_z &= \nabla \times \tan^{-1} \frac{y}{x} \bar{a}_z \\
 &= \begin{vmatrix} \hat{\partial} & \hat{\partial} & \hat{\partial} \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ 0 & 0 & \tan^{-1} \frac{y}{x} \end{vmatrix} \\
 &= \frac{x}{x^2 + y^2} \bar{a}_x + \frac{y}{x^2 + y^2} \bar{a}_y \\
 &= \frac{x}{\rho^2} \bar{a}_x + \frac{y}{\rho^2} \bar{a}_y \\
 &= \underline{\underline{\nabla \ln \rho}}, \text{ as expected!}
 \end{aligned}$$

Prob 3.23

$$\nabla \phi = \frac{1}{r \sin \phi} \bar{a}_\phi, \quad \nabla \theta = \frac{1}{r} \bar{a}_\theta$$

$$\frac{r \nabla \theta}{\sin \theta} = \frac{\bar{a}_\theta}{\sin \theta}$$

$$\nabla \times \left(\frac{r \nabla \theta}{\sin \theta} \right) = \frac{1}{r} \sin \theta \bar{a}_\theta$$

$$\text{Thus, } \nabla \phi = \nabla \times \left(\frac{r \nabla \theta}{\sin \theta} \right)$$

Prob 3.24

$$(a) \nabla V = \underline{\underline{(6xy + z)} \bar{a}_x + 3x^2 \bar{a}_y + x \bar{a}_z}$$

$$\nabla \cdot \nabla V = \underline{\underline{6y}}$$

$$\nabla \times \nabla V = \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ 6xy + z & 3x^2 & x \end{vmatrix} = \underline{\underline{0}}$$

$$(b) \nabla V = \underline{\underline{z \cos \phi \bar{a}_\rho - z \sin \phi \bar{a}_\theta + \rho \cos \phi \bar{a}_z}}$$

$$\nabla \cdot \nabla V = \frac{1}{\rho} \frac{\partial}{\partial \rho} (\rho z \cos \phi) + \frac{z}{\rho} \cos \theta + 0 = \frac{z}{\rho} \cos \phi - \frac{z}{\rho} \cos \phi = \underline{\underline{0}}$$

$$\nabla \times \nabla V = \underline{\underline{0}}$$

$$\begin{aligned}\nabla r^n \bar{r} &= 2x^2\left(\frac{n}{2}\right)(x^2 + y^2 + z^2)^{\frac{n}{2}-1} + 2y^2\left(\frac{n}{2}\right)(x^2 + y^2 + z^2)^{\frac{n}{2}-1} \\ &\quad + 2z^2\left(\frac{n}{2}\right)(x^2 + y^2 + z^2)^{\frac{n}{2}-1} + r^n + r^n + r^n \\ &= n(x^2 + y^2 + z^2)(x^2 + y^2 + z^2)^{\frac{n}{2}-1} + 3r^n \\ &= nr^n + 3r^n = \underline{\underline{(n+3)r^n}}\end{aligned}$$

$$\begin{aligned}(b) \nabla \times r^n \bar{r} &= \frac{\partial}{\partial x} \quad \frac{\partial}{\partial y} \quad \frac{\partial}{\partial z} \\ &\quad r^n x \quad r^n y \quad r^n z \\ &= [2y\left(\frac{n}{2}\right)z(x^2 + y^2 + z^2)^{\frac{n}{2}-1} - 2z\left(\frac{n}{2}\right)y(x^2 + y^2 + z^2)^{\frac{n}{2}-1}] \bar{a}_x + \dots \\ &= 0\end{aligned}$$

Prob. 3.27

(a) Let $V = \ln r = \ln \sqrt{x^2 + y^2 + z^2}$

$$\frac{\partial V}{\partial x} = \frac{1}{r} \frac{1}{2}(2x)(x^2 + y^2 + z^2) - \frac{1}{2} = \frac{x}{r^2}$$

$$\nabla V = \frac{\partial V}{\partial x} \bar{a}_x + \frac{\partial V}{\partial y} \bar{a}_y + \frac{\partial V}{\partial z} \bar{a}_z = \frac{x \bar{a}_x + y \bar{a}_y + z \bar{a}_z}{r^2} = \underline{\underline{\frac{\bar{r}}{r^2}}}$$

(b) Let $\nabla V = \bar{A} = \frac{\bar{r}}{r^2} = \frac{1}{r} \bar{a}_x$ in spherical coordinates.

$$\begin{aligned}\nabla^2 (Inr) &= \nabla \cdot \nabla (Inr) = \nabla \cdot \bar{A} = \frac{1}{r^2} \frac{\partial}{\partial r} (r^2 A_r) = \frac{1}{r^2} \frac{d}{dr} (r) \\ &= \underline{\underline{\frac{1}{r^2}}}\end{aligned}$$

Prob 3.28

(a)

$$V_1 = x^3 + y^3 + z^3$$

$$\begin{aligned}\nabla^2 V_1 &= \frac{\partial^2 V_1}{\partial x^2} + \frac{\partial^2 V_1}{\partial y^2} + \frac{\partial^2 V_1}{\partial z^2} \\ &= \frac{\partial^2}{\partial x^2}(3x^2) + \frac{\partial^2}{\partial y^2}(3y^2) + \frac{\partial^2}{\partial z^2}(3z^2) \\ &= 6x + 6y + 6z = \underline{\underline{6(x+y+z)}}\end{aligned}$$

(b)

(c)

$$W = e^{-r} \sin\theta \cos\phi$$

$$\nabla^2 W = \frac{1}{r^2} \frac{\partial}{\partial r} (-r^2 e^{-r} \sin\theta \cos\phi) + \frac{e^{-r}}{r^2 \sin\theta} \cos\phi \frac{\partial}{\partial \theta} (\sin\theta \cos\phi)$$

$$= -\frac{e^{-r} \sin\theta \cos\phi}{r^2 \sin^2 \theta}$$

$$= \frac{1}{r^2} (-2r e^{-r} \sin\theta \cos\phi) + e^{-r} \sin\theta \cos\phi$$

$$+ \frac{e^{-r} \cos\phi}{r^2 \sin\theta} (\cos^2 \theta - \sin^2 \theta) - \frac{-e^{-r} \cos\theta}{r^2 \sin\theta}$$

$$\nabla^2 W = e^{-r} \sin\theta \cos\phi \left(I - \frac{4}{r} \right)$$

At $(1, 60^\circ, 30^\circ)$,

$$\nabla^2 W = e^{-1} \sin 60 \cos 30 \left(I - \frac{4}{r} \right) = -2.25 e^{-1} = -0.8277$$

Prob 3.30

(a)

$$\begin{aligned} \nabla^2 V &= \frac{\partial^2 V}{\partial x^2} + \frac{\partial^2 V}{\partial y^2} + \frac{\partial^2 V}{\partial z^2} \\ &= 2(y^2 z^2 + x^2 z^2 + x^2 y^2) \end{aligned}$$

(b)

$$\begin{aligned} \nabla^2 \bar{A} &= \nabla^2 A_x \bar{a}_x + \nabla^2 A_y \bar{a}_y + \nabla^2 A_z \bar{a}_z \\ &= (2y + 0 + 0) \bar{a}_x + (0 + 0 + 6xz) \bar{a}_y + (0 - 2z^2 - 2y^2) \bar{a}_z \\ &= 2y \bar{a}_x + 6xz \bar{a}_y - 2(y^2 + z^2) \bar{a}_z \end{aligned}$$

(c)

$$\begin{aligned} \text{grad div } A &= \nabla(\nabla \cdot \bar{A}) = \nabla(2xy + 0 - 2y^2 z) \\ &= 2y \bar{a}_x + 2(x - 2yz) \bar{a}_y - 2y^2 \bar{a}_z \end{aligned}$$


(d)

$$\text{curl curl } \bar{A} = \nabla x \nabla x \bar{A} = \nabla(\nabla \cdot \bar{A}) - \nabla^2 \bar{A}$$

From parts (b) and (c),

$$\nabla x \nabla x A = 2(x - 2yz - 3xz) \bar{a}_y + 2z^2 \bar{a}_z$$

Prob 3.32

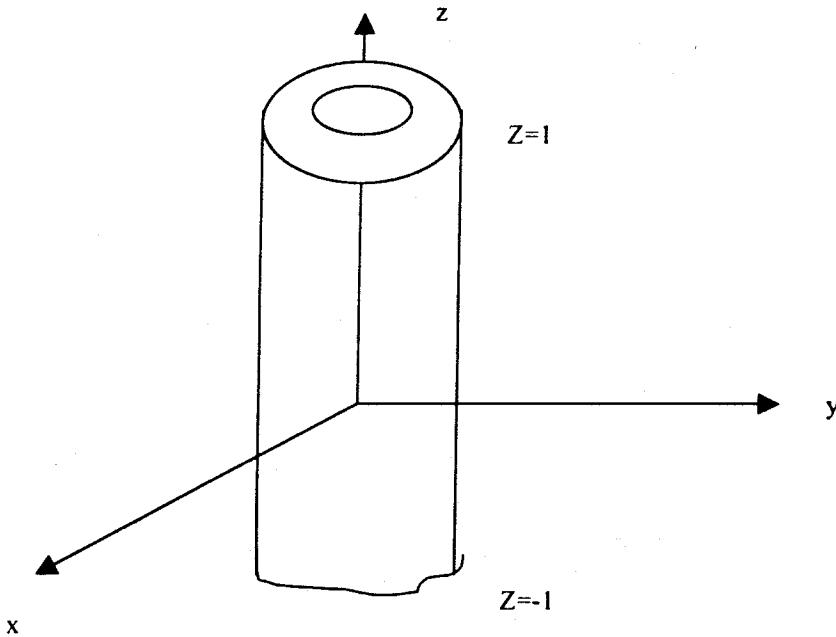

(a)

$$\begin{aligned}
 \oint \bar{D} \bullet d\bar{s} &= \left[\iint_{z=-1} + \iint_{z=1} + \iint_{\rho=2} + \iint_{\rho=5} \right] \bar{D} \bullet d\bar{s} \\
 &= - \iint \rho^2 \cos^2 \phi d\phi d\rho + \iint \rho^2 \cos^2 \phi d\phi d\rho - \iint 2\rho^2 z^2 d\phi dz \Big|_{\rho=2} + \iint 2\rho^2 z^2 d\phi dz \Big|_{\rho=5} \\
 &= - 2(2)^2 \int_0^{2\pi} d\phi \int_{-1}^1 z^2 dz + 2(5)^2 \int_0^{2\pi} d\phi \int_{-1}^1 z^2 dz \\
 &= - 8(2\pi) \left(\frac{z^3}{3}\right) \Big|_{-1}^1 + 50(2\pi) \left(\frac{z^3}{3}\right) \Big|_{-1}^1 \\
 &= - \frac{32\pi}{3} + \frac{200\pi}{3} = \underline{\underline{176}}
 \end{aligned}$$

$$(b) \nabla \bullet \bar{D} = \frac{1}{\rho} \frac{\partial}{\partial \rho} (2\rho^2 z^2) = 4z^2$$

$$\begin{aligned}
 \int \nabla \bullet D dv &= \iiint 4z^2 \rho d\rho d\phi dz = 4 \int_{-1}^1 z^2 dz \int_2^5 \rho d\rho \int_0^{2\pi} d\phi \\
 &= 4x \frac{z^3}{3} \Big|_{-1}^1 \cdot \frac{\rho^2}{2} \Big|_2^5 (2\pi) = 56\pi = \underline{\underline{176}}
 \end{aligned}$$

Prob 3.35

(a)

$$\nabla \bullet \bar{A} = y^2 + 3y^2 + y^2 = 5y^2$$

$$\begin{aligned}\int \nabla \bullet \bar{A} dv &= \iiint 5y^2 dx dy dz \\ &= 5 \int_0^l dx \int_0^l y^2 dy \int_0^l dz = 5(I)(I)\left(\frac{y^3}{3}\Big|_0^l\right) = \underline{\underline{1.667}}\end{aligned}$$

$$\begin{aligned}\oint \bar{A} \bullet d\bar{S} &= \left[\iint_{x=0} + \iint_{x=l} + \iint_{y=0} + \iint_{y=l} + \iint_{z=0} + \iint_{z=l} \right] \bar{A} \bullet d\bar{S} \\ &= - \iint xy^2 dy dz \Big|_{x=0} + \iint xy^2 dy dz \Big|_{x=l} - \iint y^3 dx dz \Big|_{y=0} \\ &\quad + \iint y^3 dx dz \Big|_{y=l} - \iint y^2 z dx dy \Big|_{z=0} + \iint y^2 z dx dy \Big|_{z=l} \\ &= (I)(I)\left(\frac{y^3}{3}\Big|_0^l\right) + (I)(I)(I) + (I)(I)\left(\frac{y^3}{3}\Big|_0^l\right) = \underline{\underline{1.667}}\end{aligned}$$

(b)

$$\nabla \bullet \bar{A} = \frac{l}{\rho} \frac{\partial}{\partial \rho} (2\rho^2 z) + \frac{3z \cos \phi}{\rho} - 0 = 4z + \frac{3z \cos \phi}{\rho}$$

$$\begin{aligned}\int_V \nabla \bullet \bar{A} &= \iiint \left(4z + \frac{3z}{\rho} \cos \phi\right) \rho d\rho d\phi dz \\ &= 4 \int_0^2 \rho d\rho \int_0^5 zdz \int_0^{45^\circ} d\phi + 3 \int_0^2 \rho d\rho \int_0^5 zdz \int_0^{45^\circ} \cos \phi d\phi \\ &= 4\left(\frac{4}{2}\right)\left(\frac{25}{2}\right)\left(\frac{11}{4}\right) + 3(2)\left(\frac{25}{2}\right) \sin 45^\circ \\ &= 25\pi + 75 \sin 45^\circ = \underline{\underline{131.57}}\end{aligned}$$

$$\begin{aligned}\oint_S \bar{A} \bullet d\bar{S} &= \left[\iint_{\rho=2} + \iint_{z=0} + \iint_{z=5} + \iint_{\phi=0} + \iint_{\phi=45^\circ} \right] \bar{A} \bullet d\bar{S} \\ &= J_1 + J_2 + J_3 + J_4 + J_5\end{aligned}$$

$$\int \bar{A} \cdot d\bar{S} = \left[\iint_{\phi=0} + \iint_{\phi=\pi/2} + \iint_{r=3} + \iint_{\theta=\pi/2} \right] \bar{A} \cdot d\bar{S}$$

Since \bar{A} has no ϕ -component, the first two integrals vanish.

$$\begin{aligned} \int \bar{A} \cdot d\bar{S} &= \int_{\phi=0}^{\pi/2} \int_{\theta=0}^{\pi/2} r^4 \sin\theta \, d\theta \, d\phi \Big|_{r=3} + \int_{r=0}^3 \int_{\theta=0}^{\pi/2} r^2 \sin^2\theta \cos\theta \, dr \, d\theta \Big|_{\phi=\pi/2} \\ &= 8I \left(\frac{\pi}{2}\right) (-\cos\theta) \Big|_0^{\pi/2} + 9(I) \sin\phi \Big|_0^{\pi/2} \\ &= \frac{8I\pi}{2} + 9 = \underline{\underline{136.23}} \end{aligned}$$

Prob. 3.36

$$\int \rho_V \, dv = \oint_S \bar{A} \cdot d\bar{S} \quad (\text{divergence theorem})$$

where $\rho_V = \nabla \cdot \bar{A} = x^2 + y^2$

$$\frac{\partial A_x}{\partial x} = x^2 \longrightarrow A_x = \frac{x^3}{3} + C_1$$


$$\frac{\partial A_y}{\partial y} = y^2 \longrightarrow A_y = \frac{y^3}{3} + C_2$$

Hence,

$$\bar{A} = \underline{\underline{(\frac{x^3}{3} + C_1)\bar{a}_x + (\frac{y^3}{3} + C_2)\bar{a}_y}}$$

Prob. 3.37

(a)

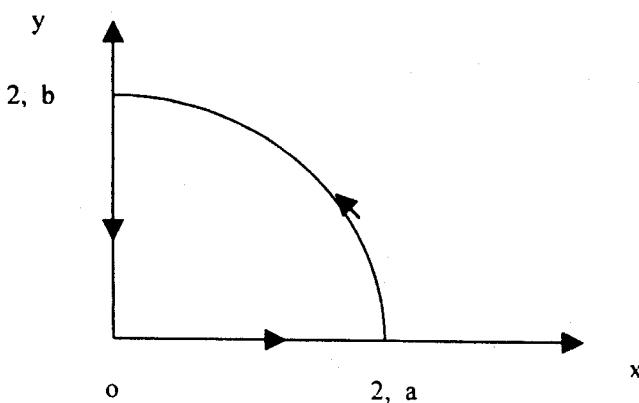

$$\begin{aligned}\int_V \nabla \cdot \bar{F} dv &= \iiint (\beta \rho \sin \phi - \frac{z}{\rho} \sin \phi + \rho) \rho d\phi d\rho dz \\ &= 0 + 0 + \int_0^5 dz \int_0^{2\pi} d\phi \int_2^3 \rho^2 d\rho \\ &= \underline{\underline{\frac{190 \pi}{3}}}\end{aligned}$$

Prob. 3.39

Let $\bar{B} = \nabla \times \bar{T}$

$$\psi = \oint_S \bar{B} \cdot d\bar{S} = \int \nabla \cdot \bar{B} dv = \int \nabla \cdot \nabla \times \bar{T} dv = 0$$

Prob 3.40

$$\begin{aligned}\bar{Q} &= \frac{r}{r \sin \theta} r \sin \theta [(\cos \phi - \sin \phi) \bar{a}_x + (\cos \phi + \sin \phi) \bar{a}_y] \\ &= r(\cos \phi - \sin \phi) \bar{a}_x + r(\cos \phi + \sin \phi) \bar{a}_y\end{aligned}$$

$$\begin{bmatrix} Q_r \\ Q_\theta \\ Q_\phi \end{bmatrix} = \begin{bmatrix} \sin \theta \cos \phi & \sin \theta \sin \phi & \cos \theta \\ \cos \theta \cos \phi & \cos \theta \sin \phi & -\sin \theta \\ -\sin \phi & \cos \phi & 0 \end{bmatrix} \begin{bmatrix} Q_x \\ Q_y \\ Q_z \end{bmatrix}$$

$$\bar{Q} = r \sin \theta \bar{a}_r + r \cos \theta \bar{a}_\theta + r \bar{a}_\phi$$

(a)

$$d\bar{l} = \rho d\phi \bar{a}_\phi, \quad \rho = r \sin 30^\circ = 2\left(\frac{1}{2}\right) = 1$$

$$z = r \cos 30^\circ = \sqrt{3}$$

$$Q_\phi = r = \sqrt{\rho^2 + z^2}$$

$$\oint \bar{Q} \cdot d\bar{l} = \int_0^{2\pi} \sqrt{\rho^2 + z^2} \rho d\phi = 2(1)(2\pi) = \underline{\underline{4\pi}}$$

(b)

$$\nabla \times \bar{Q} = \cot \theta \bar{a}_r - 2 \bar{a}_\theta + \cos \theta \bar{a}_\phi$$

$$\text{For } S_r, \quad d\bar{S} = r^2 \sin \theta d\theta d\phi \bar{a}_r$$

$$\begin{aligned}\int_{S_r} (\nabla \times \bar{Q}) \cdot d\bar{S} &= \int r^2 \sin \theta \cot \theta d\theta d\phi \Big|_{r=2} \\ &= 4 \int d\phi \int_{\pi/2}^{3\pi/2} \cos \theta d\theta = \underline{\underline{4\pi}}\end{aligned}$$

(c)

$$\text{For } S_2, \quad d\bar{S} = r \sin\theta d\theta dr \bar{a}_\theta$$

$$\begin{aligned}\int_{S_2} (\nabla \times \bar{Q}) \cdot d\bar{S} &= -2 \int_{r=2} r \sin\theta d\phi dr \Big|_{\theta=30^\circ} \\ &= -2 \sin 30 \int_0^2 r dr \int_0^{2\pi} d\phi \\ &= \underline{\underline{-4\pi}}\end{aligned}$$

(d)

$$\text{For } S_1, \quad d\bar{S} = r^2 \sin\theta d\phi d\theta \bar{a}_r$$

$$\begin{aligned}\int_{S_1} \bar{Q} \cdot d\bar{S} &= \int_{r=2} r^3 \int \sin^2\theta d\theta d\phi \Big|_{r=2} \\ &= 8 \int_0^{2\pi} d\phi \int_0^{30^\circ} \sin^2\theta d\theta \\ &= \underline{\underline{4\pi \left[\frac{\pi}{3} - \frac{\sqrt{3}}{2} \right]}}\end{aligned}$$

(e)

$$\text{For } S_2, \quad d\bar{S} = r \sin\theta d\phi dr \bar{a}_\theta$$

$$\begin{aligned}\int_{S_2} \bar{Q} \cdot d\bar{S} &= \int_{r=2} r^2 \sin\theta \cos\theta d\phi dr \Big|_{\theta=30^\circ} \\ &= \underline{\underline{\frac{4\pi\sqrt{3}}{3}}}\end{aligned}$$

(f)

$$\begin{aligned}\nabla \cdot \bar{Q} &= \frac{1}{r^2} \frac{\partial}{\partial r} (r^3 \sin\theta) + \frac{r}{r \sin\theta} \frac{\partial}{\partial \theta} (\sin\theta \cos\theta) + 0 \\ &= 2 \sin\theta + \cos\theta \cot\theta\end{aligned}$$

$$\begin{aligned}\int \nabla \cdot \bar{Q} dV &= \int (2 \sin\theta + \cos\theta \cot\theta) r^2 \sin\theta d\theta d\phi dr \\ &= \frac{r^3}{3} \int_0^2 (2\pi) \int_0^{30^\circ} (1 + \sin^2\theta) d\theta \\ &= \underline{\underline{\frac{4\pi}{3} \left(\pi - \frac{\sqrt{3}}{2} \right)}}$$

$$\begin{aligned}
 \text{Check: } \int \nabla \cdot \bar{Q} dV &= \left(\int_{S_1} + \int_{S_2} \right) (\nabla \times \bar{Q}) \cdot d\bar{S} \\
 &= 4\pi \left[\frac{\pi}{3} - \frac{\sqrt{3}}{2} + \frac{\sqrt{3}}{3} \right] \\
 &= \frac{4\pi}{3} \left[\pi - \frac{\sqrt{3}}{2} \right] \quad (\text{It checks.})
 \end{aligned}$$

Prob. 3.41

Since $\bar{u} = \bar{\omega} \times \bar{r}$, $\nabla \times \bar{u} = \nabla \times (\bar{\omega} \times \bar{r})$. From Appendix A.10,

$$\nabla \times (\bar{A} \times \bar{B}) = \bar{A}(\nabla \cdot \bar{B}) - \bar{B}(\nabla \cdot \bar{A}) + (\bar{B} \cdot \nabla) \bar{A} - (\bar{A} \cdot \nabla) \bar{B}$$

$$\nabla \times \bar{u} = \nabla \times (\bar{\omega} \times \bar{r})$$

$$\begin{aligned}
 \nabla \times (\bar{\omega} \times \bar{r}) &= \bar{\omega}(\nabla \cdot \bar{r}) - \bar{r}(\nabla \cdot \bar{\omega}) + (\bar{r} \cdot \nabla) \bar{\omega} - (\bar{\omega} \cdot \nabla) \bar{r} \\
 &= \bar{\omega}(3) - \bar{\omega} = 2\bar{\omega}
 \end{aligned}$$

$$\text{or } \bar{\omega} = \frac{I}{2} \nabla \times \bar{u}.$$

Alternatively, let $x = r \cos \omega t$, $y = r \sin \omega t$

$$\begin{aligned}
 \bar{u} &= \frac{\partial x}{\partial t} \bar{a}_x + \frac{\partial y}{\partial t} \bar{a}_y \\
 &= -\omega r \sin \omega t \bar{a}_x + \omega r \cos \omega t \bar{a}_y \\
 &= -\omega y \bar{a}_x + \omega x \bar{a}_y \\
 \nabla \times \bar{u} &= \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ -\omega y & \omega x & 0 \end{vmatrix} = 2\omega \bar{a}_z = 2\bar{\omega} \\
 \text{i.e., } \bar{\omega} &= \frac{I}{2} \nabla \times \bar{u}
 \end{aligned}$$

Prob 3.42

Let $\bar{A} = U \nabla V$ and apply Stokes' theorem.

$$\begin{aligned}
 \int_L U \nabla V \cdot d\bar{l} &= \int_S \nabla X(U \nabla V) \cdot d\bar{S} \\
 &= \int_S (\nabla U \nabla V) d\bar{S} + \int_S U (\nabla X \nabla V) \cdot d\bar{S}
 \end{aligned}$$

But $\nabla X \nabla V = 0$. Hence,

$$\int_L U \nabla V \bullet d\bar{l} = \int_S (\nabla U X \nabla V) \bullet d\bar{S}$$

Similarly, we can show that

$$\int_L V \nabla U \bullet d\bar{l} = \int_S (\nabla V X \nabla U) \bullet d\bar{S} - \int_S (\nabla U X \nabla V) \bullet d\bar{S}$$

Thus, $\int_L U \nabla V \bullet d\bar{l} = - \int_L V \nabla U \bullet d\bar{l}$

Prob. 3.43

$$\text{Let } \bar{A} = r^n \bar{r} = (x^2 + y^2 + z^2)^{n/2} (x \bar{a}_x + y \bar{a}_y + z \bar{a}_z)$$

By divergence theorem,

$$\begin{aligned} \int \bar{A} \bullet d\bar{S} &= \int \nabla \bullet \bar{A} dV \\ \nabla \bullet \bar{A} &= \frac{\partial Ax}{\partial x} + \frac{\partial Ay}{\partial y} + \frac{\partial Az}{\partial z} \\ &= \frac{\partial}{\partial x}(xr^n) + \frac{\partial}{\partial y}(yr^n) + \frac{\partial}{\partial z}(zr^n) \\ &= r^n + 2x^2\left(\frac{n}{2}\right)(x^2 + y^2 + z^2)^{n/2-1} \\ &\quad + r^n + 2y^2\left(\frac{n}{2}\right)(x^2 + y^2 + z^2)^{n/2-1} \\ &\quad + r^n + 2z^2\left(\frac{n}{2}\right)(x^2 + y^2 + z^2)^{n/2-1} \\ &= 3r^n + n(x^2 + y^2 + z^2)r^{n-1} \\ &= (3+n)r^n \end{aligned}$$

Thus, $\oint r^n \bar{r} d\bar{s} = \int (3+n)r^n dV$

or $\int r^n dV = \frac{1}{n+3} \oint r^n \bar{r} d\bar{s}$

Prob 3.44

(a)

$$\nabla \times \bar{G} = \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ \hat{a}_x & \hat{a}_y & \hat{a}_z \\ 16xy - z & 8x^2 & -x \end{vmatrix}$$

$$= 0 \bar{a}_x + (-1+1) \bar{a}_y + (16x - 16x) \bar{a}_z = 0$$

Thus, G is irrotational.


(b)

$$4 = \oint \bar{G} \cdot d\bar{s} = \int \nabla \cdot \bar{G} dv$$

$$\nabla \cdot \bar{G} = 16y + 0 + 0 = 16y$$

$$4 = \iiint 16y dx dy dz = 16 \int_0^1 dx \int_0^1 dz \int_0^1 y dy = 16(1)(1)\left(\frac{y^2}{2}\Big|_0^1\right) = 8$$

(c)

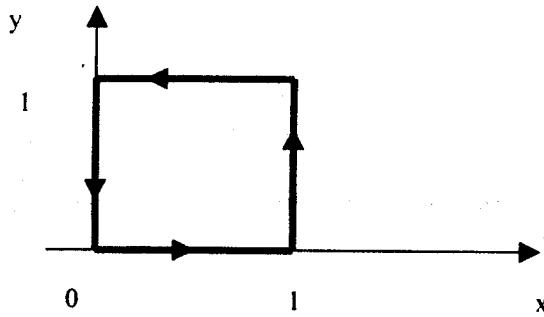

$$\begin{aligned} \oint_L G \cdot d\bar{l} &= \int_{x=0}^{x=1} (16xy - z) dx \Big|_{y=0}^{y=1} + \int_{y=0}^{y=1} 8x^2 dy \Big|_{z=0}^{z=1} + \int_{z=1}^{z=0} (16xy - z) dx \Big|_{y=1}^{y=0} + \int_{y=1}^{y=0} 8x^2 dy \Big|_{z=0}^{z=1} \\ &= 0 + 8(1)y \Big|_0^1 + 16(1) \frac{x^2}{2} \Big|_0^1 + 0 \\ &= 8 - 8 = 0 \end{aligned}$$

This is expected since G is irrotational, i.e.

$$\oint L G \cdot d\bar{l} = \int (\nabla \times \bar{G}) \cdot d\bar{S} = 0$$

Prob 3.45

$$\begin{aligned} \nabla \times \bar{T} &= \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ \alpha x + \beta z^2 & 3x^2 - \gamma z & 3xz^2 - y \end{vmatrix} \\ &= (-1 + \gamma) \bar{a}_x + (3\beta z^2 - 3z^2) \bar{a}_y + (6x - \alpha x) \bar{a}_z \end{aligned}$$

If \bar{T} is irrotational, $\nabla \times \bar{T} = 0$, i.e.

$$\underline{\underline{\alpha = 1 = \beta = \gamma}}$$

$$\nabla \bullet \bar{T} = \frac{\partial \bar{T}_x}{\partial x} + \frac{\partial \bar{T}_y}{\partial y} + \frac{\partial \bar{T}_z}{\partial z} = \alpha y + \theta + 6xz$$

At $(2, -1, 0)$,

$$\nabla \bullet \bar{T} = -1 + 0 = \underline{\underline{-1}}$$

CHAPTER 4


P. E. 4.1

$$(a) \bar{F} = \frac{I \times 10^{-9}}{4\pi \left(\frac{10^{-9}}{36\pi} \right)} \left[\frac{5 \times 10^{-9} [(1, -3, 7) - (2, 0, 4)]}{[(1, -3, 7) - (2, 0, 4)]^3} \right. \\ \left. - \frac{2 \times 10^{-9} [(1, -3, 7) - (-3, 0, 5)]}{[(1, -3, 7) - (-3, 0, 5)]^3} \right] \\ = \left[\frac{45(-1, -3, 3)}{19^{3/2}} - \frac{18(4, -3, 2)}{29^{3/2}} \right] \text{nN}$$

$$(a) = \underline{-1.004 \bar{a}_x - 1.284 \bar{a}_y + 1.4 \bar{a}_z \text{ nN}}$$

$$(b) \bar{E} = \frac{\bar{F}}{Q} = \underline{-1.004 \bar{a}_x - 1.284 \bar{a}_y + 1.4 \bar{a}_z \text{ V/m}}$$

P. E. 4.2

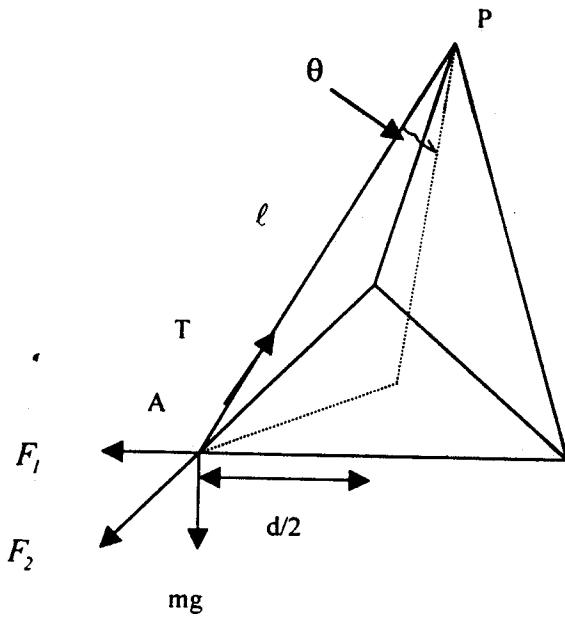

At point A,

$$T \sin \theta \cos 30^\circ = F_1 + F_2 \cos 60^\circ \\ = \frac{q^2}{4\pi\epsilon_0 d^2} + \frac{q^2}{4\pi\epsilon_0 d^2} \left(\frac{l}{2} \right) \\ = \frac{3q^2}{8\pi\epsilon_0 d^2}$$

$$T \cos \theta = mg$$

$$\text{Hence, } \tan \theta \cos 30^\circ = \frac{3q^2}{8\pi\epsilon_0 d^2} mg$$

$$\text{But } \sin \theta = \frac{h}{l} = \frac{d}{\sqrt{3}l} \tan \theta = \frac{\frac{d}{\sqrt{3}}}{\sqrt{l^2 - \frac{d^2}{3}}}$$

$$\text{Thus, } \frac{\frac{d}{\sqrt{3}}(\frac{\sqrt{3}}{2})}{\sqrt{l^2 - \frac{d^2}{3}}} = \frac{3q^2}{8\pi\epsilon_0 d^2 mg}$$

$$\text{or } q^2 = \frac{4\pi\epsilon_0 d^3 mg}{3\sqrt{l^2 - \frac{d^2}{3}}}$$

$$\text{but } q = \frac{Q}{3} \longrightarrow q^2 = \frac{Q^2}{9}. \text{ Hence,}$$

$$Q^2 = \frac{12\pi\epsilon_0 d^3 mg}{\sqrt{l^2 - \frac{d^2}{3}}}$$

P.E. 4.3

$$e\ddot{E} = m \frac{d^2 \ddot{l}}{dt^2}$$

$$eE_0(-2\ddot{a}_x + \ddot{a}_y) = m\left(\frac{d^2 x}{dt^2}\ddot{a}_x + \frac{d^2 y}{dt^2}\ddot{a}_y + \frac{d^2 z}{dt^2}\ddot{a}_z\right)$$

$$\text{where } E_0 = 200 \text{ kV/m}$$

$$\frac{d^2 z}{dt^2} = 0 \longrightarrow z = ct + c_2$$

$$m \frac{d^2 x}{dt^2} = -2eE_0 \longrightarrow x = \frac{-2eE_0 t^2}{2m} + c_3 t + c_4$$

$$m \frac{d^2 y}{dt^2} = eE_0 \longrightarrow y = \frac{eE_0 t^2}{2m} + c_5 t + c_6$$

At $t = 0$, $(x, y, z) = (0, 0, 0)$ $c_1 = 0 = c_3 = c_5$

Also, $(\frac{dx}{dt}, \frac{dy}{dt}, \frac{dz}{dt}) = (0, 0, 0)$

At $t = 0 \longrightarrow c_1 = 0 = c_3 = c_5$

Hence, $(x, y) = \frac{eE_0 t^2}{2m} (-2, 1)$

i.e. $2|y| = |x|$

Thus the largest horizontal distance is

$$80 \text{ cm} = \underline{\underline{0.8 \text{ m}}}$$

P.E. 4.4

(a)

Consider an element of area ds of the disk.

The contribution due to $ds = \rho d\phi d\rho$ is

$$dE = \frac{\rho_s ds}{4\pi\epsilon_0 r^2} = \frac{\rho_s ds}{4\pi\epsilon_0 (\rho^2 + h^2)^{3/2}}$$

The sum of the contribution along ρ gives zero.

$$\begin{aligned} E_z &= \frac{\rho_s}{4\pi\epsilon_0} \int_{\rho=0}^a \int_{\phi=0}^{2\pi} \frac{z\rho d\rho d\phi}{(\rho^2 + h^2)^{3/2}} = \frac{h\rho_s}{2\epsilon_0} \int_{\rho=0}^a \frac{\rho d\rho}{(\rho^2 + h^2)^{3/2}} \\ &= \frac{h\rho_s}{4\epsilon_0} \int_0^a (\rho^2 + h^2)^{3/2} d(\rho^2) = \frac{h\rho_s}{2\epsilon_0} (-2(\rho^2 + h^2)^{-1/2}) \Big|_0^a \\ &= \frac{\rho_s}{2\epsilon_0} \left[1 - \frac{h}{(h^2 + a^2)^{1/2}} \right] \end{aligned}$$

(b)

As $a \longrightarrow \infty$,

$$\bar{E} = \underline{\underline{\frac{\rho_s}{2\epsilon_0} \bar{a}_z}}$$

P.E. 4.5

$$Q_S = \int \rho_s dS = \int_{-2}^2 \int_{-2}^2 12|y| dx dy$$

$$= 12(4) \int_0^2 2y dy = \underline{\underline{192 \text{ mC}}}$$

$$\bar{E} = \int \frac{\rho_s dS}{4\pi\epsilon_0 r^2} \bar{a}_r = \int \frac{\rho_s dS |\bar{r} - \bar{r}'|}{4\pi\epsilon_0 |\bar{r} - \bar{r}'|^3}$$

$$\bar{E} = \frac{\rho_L}{2\pi\epsilon_0\rho} \bar{a}_\rho$$

To get \bar{a}_ρ , consider the $z = -l$ plane. $\rho = \sqrt{2}$

$$\bar{a}_\rho = \bar{a}_x \cos 45^\circ - \bar{a}_y \sin 45^\circ$$

$$= \frac{1}{\sqrt{2}} (\bar{a}_x - \bar{a}_y)$$

$$\bar{E}_3 = \frac{10(10^{-9})}{2\pi(\frac{10^{-9}}{36\pi})} \frac{l}{2} (\bar{a}_x - \bar{a}_y)$$

$$= 90\pi (\bar{a}_x - \bar{a}_y). \quad \text{Hence,}$$

$$\bar{E} = \bar{E}_1 + \bar{E}_2 + \bar{E}_3$$

$$= -180\pi \bar{a}_x + 270\pi \bar{a}_y + 90\pi \bar{a}_x - 90\pi \bar{a}_y.$$

$$= \underline{\underline{-282.7 \bar{a}_x + 565.5 \bar{a}_y \text{ V/m}}}$$

P.E. 4.7

$$\begin{aligned}\bar{D} &= \bar{D}_Q + \bar{D}_\rho = \frac{Q}{4\pi r^2} \bar{a}_r + \frac{\rho_s}{2} \bar{a}_n \\ &= \frac{30 \times 10^{-9}}{4\pi (5)^2} \frac{[(0,4,3) - (0,0,0)]}{5} + \frac{10 \times 10^{-9}}{2} \bar{a}_y \\ &= \frac{30}{500\pi} (0,4,3) + 5 \bar{a}_y \text{ nC/m}^2 \\ &= \underline{\underline{5.076 \bar{a}_y + 0.0573 \bar{a}_z \text{ nC/m}^2}}\end{aligned}$$

P.E. 4.8

$$(a) \rho v = \nabla \bullet \bar{D} = 4x$$

$$\rho v(-1,0,3) = \underline{\underline{-4 \text{ C/m}^3}}$$

$$\begin{aligned}(b) 4 &= Q = \int \rho v dv = \iiint_{0,0,0}^{1,1,1} 4x dx dy dz \\ &= 4(1)(1)(1/2) = \underline{\underline{2 \text{ C}}}\end{aligned}$$

$$(c) Q = 4 = \underline{\underline{2 \text{ C}}}$$

P.E. 4.11

$$V = \frac{Q}{4\pi\epsilon_0 r} + C$$

If $V(0,6,-8) = V(r = 10) = 2$;

$$2 = \frac{5(10^{-9})}{4\pi(\frac{10^{-9}}{36\pi})} + C \quad \longrightarrow \quad C = -2.5$$

(a)

$$\begin{aligned} V_A &= \frac{5(10^{-9})}{4\pi(\frac{10^{-9}}{36\pi})|(-3,2,6) - (0,0,0)|} - 2.5 \\ &= \underline{\underline{3.929 \text{ V}}} \end{aligned}$$

(b)

$$V_B = \frac{45}{\sqrt{1^2 + 1^2 + 5^2}} - 2.5 = \underline{\underline{2.696 \text{ V}}}$$

$$(b) \quad V_{AB} = V_B - V_A = 2.696 - 3.929 = \underline{\underline{-1.233 \text{ V}}}$$

P.E. 4.12

(a)

$$\begin{aligned} \frac{-W}{Q} &= \int \bar{E} \cdot d\bar{l} = \int (3x^2 + y)dx + xdy \\ &= \int_0^2 (3x^2 + y)dx \Big|_{y=5} + \int_5^{-1} x dy \Big|_{x=2} \\ &= 18 - 12 = 6 \end{aligned}$$

$$W = -6Q = \underline{\underline{12 \text{ mJ}}}$$

(b)

$$dy = -3dx$$

$$\begin{aligned} \frac{-W}{Q} &= \int \bar{E} \cdot d\bar{l} = \int_0^2 (3x^2 + 5 - 3x)dx + x(-3)dx \\ &= \int_0^2 (3x^2 - 6x + 5)dx = 8 - 12 + 10 = 6 \end{aligned}$$

$$W = \underline{\underline{12 \text{ nJ}}}$$

P.E. 4.15

After Q_4 ,

$$\begin{aligned}
 W_4 &= Q_4(V_{41} + V_{42} + V_{43}) + Q_3(V_{31} + V_{32}) + Q_2V_{21} \\
 &= -4(9)(10^{-9}) \left\{ \frac{1}{|(0,0,1) - (0,0,0)|} + \frac{-2}{|(0,0,1) - (1,0,0)|} + \frac{3}{|(0,0,1) - (0,0,-1)|} \right\} + W_3 \\
 &= -36 \left(1 - \frac{2}{\sqrt{2}} + \frac{3}{2} \right) + W_3 \\
 &= -39.09 - 29.18 \text{ nJ} = \underline{\underline{-68.27 \text{ nJ}}}
 \end{aligned}$$


Prob. 4.1

(a)

$$\begin{aligned}
 \bar{F}_{Q_1} &= \frac{Q_1 Q_2 (\bar{r}_{Q_1} - \bar{r}_{Q_2})}{4\pi \epsilon \left| \bar{r}_{Q_1} - \bar{r}_{Q_2} \right|^3} = \frac{-20(10^{-12})[(3,2,1) - (-4,0,0)]}{4\pi \frac{10^{-9}}{36\pi} |(3,2,1) - (-4,0,0)|^3} = -0.5655 \frac{(7,2,5)}{688.88} \\
 &= \underline{\underline{-5.746 \bar{a}_x - 1.642 \bar{a}_y + 4.104 \bar{a}_z \text{ mN}}
 \end{aligned}$$

Prob 4.2

(a)

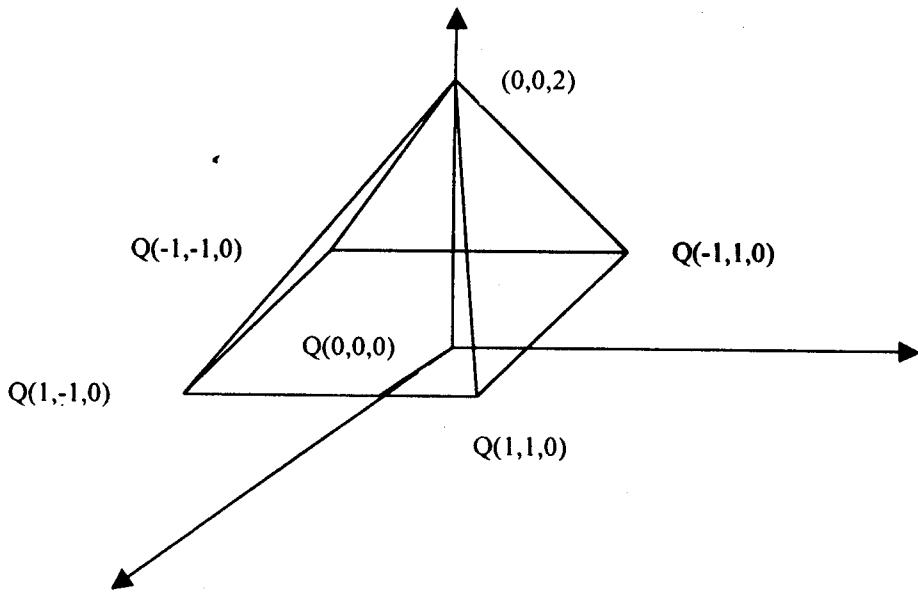

Prob 4.7

$$\bar{E} = \int \frac{\rho dl \bar{R}}{4\pi \epsilon_0 R^3}; \quad dl = dy; \quad \bar{R} = (5, 0, 0) - (0, y, 0) = 5\bar{a}_x - y\bar{a}_y$$

$$\begin{aligned}\bar{E} &= \rho_L \int \frac{5\bar{a}_x - y\bar{a}_y}{4\pi \epsilon_0 (y^2 + 25)^{3/2}} \\ &= \frac{2(10^{-3})}{4\pi(10^{-9}/36\pi)} \int_0^5 (5\bar{a}_x + y\bar{a}_y) \frac{I}{(y^2 + 25)^{3/2}} dy \\ &= 18(10^6)[k_x \bar{a}_x + k_y \bar{a}_y]\end{aligned}$$

$$\text{where } k_x = \int_0^5 \frac{dy}{(y^2 + 25)^{3/2}} = \frac{5(y/25)}{\sqrt{y^2 + 25}} \Big|_0^5 = -\frac{I}{\sqrt{50}} = -0.1414$$

$$\text{where } k_y = \int_0^5 \frac{y}{(y^2 + 25)^{3/2}} dy = \frac{I}{\sqrt{y^2 + 25}} \Big|_0^5 = - -\frac{I}{\sqrt{50}} + \frac{I}{5} = 0.05858$$

$$\bar{E} = \underline{-2.545\bar{a}_x + 1.054\bar{a}_y \text{ mV/m}}$$

Prob. 4.8

$$\bar{E} = \int \frac{\rho dS \bar{R}}{4\pi \epsilon_0 R^3}; \quad dS = \rho d\phi d\rho; \quad R = \sqrt{\rho^2 + h^2}$$

$$\bar{R} = -\rho \bar{a}_\rho + h \bar{a}_z$$

$$\begin{aligned}\bar{E} &= \frac{\rho_s}{4\pi \epsilon_0} \int \frac{(-\rho \bar{a}_\rho + h \bar{a}_z) \rho d\phi d\rho}{(\rho^2 + h^2)^{3/2}} \\ &= \frac{5(10^{-3})}{4\pi(10^{-9}/36\pi)} \left[- \int_{\phi=0}^{\pi/2} \int_{\rho=0}^4 \frac{\rho^2 d\phi d\rho}{(\rho^2 + h^2)^{3/2}} \bar{a}_\rho + h \int_{\phi=0}^{\pi/4} \int_{\rho=0}^4 \frac{\rho d\phi d\rho}{(\rho^2 + h^2)^{3/2}} \bar{a}_z \right] \\ &= 45(10^6) \left[-\frac{\pi}{2} \int \frac{\rho^2 d\rho}{(\rho^2 + h^2)^{3/2}} \bar{a}_\rho + \frac{\pi h}{2} \int \frac{\rho d\rho}{(\rho^2 + h^2)^{3/2}} \bar{a}_z \right]\end{aligned}$$

$$\text{But } \int \frac{x^2 dx}{(x^2 + a^2)^{3/2}} = \ln\left(\frac{\sqrt{x^2 + a^2}}{a} + \frac{x}{a}\right) - \frac{x}{\sqrt{x^2 + a^2}} + C$$

$$\text{and } \int \frac{x dx}{(x^2 + a^2)} = -\frac{1}{\sqrt{x^2 + a^2}} + C$$

$$\text{Let } \bar{E} = 45 (10^2) \left[\frac{-\pi}{2} k_p \bar{a}_p + \frac{\pi}{2} h k_z \bar{a}_z \right]$$

$$k_p = \left[\ln\left(\frac{\sqrt{\rho^2 + h^2}}{h}\right) + \frac{\rho}{h} \right] \Big|_{\rho=0}^{\rho} = \ln 2 - \frac{4}{5} = -0.1068$$

$$k_z = \frac{-1}{\sqrt{\rho^2 + h^2}} \Big|_0^{\rho} = -\frac{1}{5} + \frac{1}{3} = 0.1338$$

$$\bar{E} = \frac{45}{4} (10^6) [0.671 \bar{a}_p + 2.5126 \bar{a}_z]$$

$$= \underline{\underline{7.549 \bar{a}_p + 28.27 \bar{a}_z \text{ mV/m}}}$$

(b)

The result is the same as that in (a) except that instead of

$$\int_{\phi=0}^{\pi/2} d\phi = \frac{\pi}{2}, \text{ we now have } \int_{\phi=0}^{\pi/2} \sin \phi d\phi = -\cos \phi \Big|_0^{\pi/2} = 1$$

That is, we replace $\pi/2$ by 1

$$\bar{E} = 45(10^6) [-k_p \bar{a}_p + h k_z \bar{a}_z]$$


$$= \underline{\underline{4.806 \bar{a}_p + 18 \bar{a}_z \text{ mV/m}}}$$

Prob 4.9

$$V = \int_S \frac{\rho_s dS}{4\pi\epsilon_0 r}; \quad \rho_s = \frac{l}{\rho}; \quad dS = \rho d\phi d\rho; \quad r = \sqrt{\rho^2 + h^2}$$

$$\begin{aligned} V &= \frac{l}{4\pi\epsilon_0} \iint \frac{\rho}{(\rho^2 + h^2)^{1/2}} d\phi d\rho = \frac{l}{4\pi\epsilon_0} \int_0^{2\pi} d\phi \int_{\rho=0}^a \frac{d\rho}{(\rho^2 + h^2)} \\ &= \frac{2\pi}{4\pi\epsilon_0} \ln(\rho + \sqrt{\rho^2 + h^2}) \Big|_{\rho=0}^a = \frac{l}{2\epsilon_0} [\ln(a + \sqrt{\rho^2 + h^2}) - \ln h] \\ &= \underline{\underline{\frac{l}{2\epsilon_0} \ln \frac{a + \sqrt{\rho^2 + h^2}}{h}}} \end{aligned}$$

Prob. 4.10 (a)

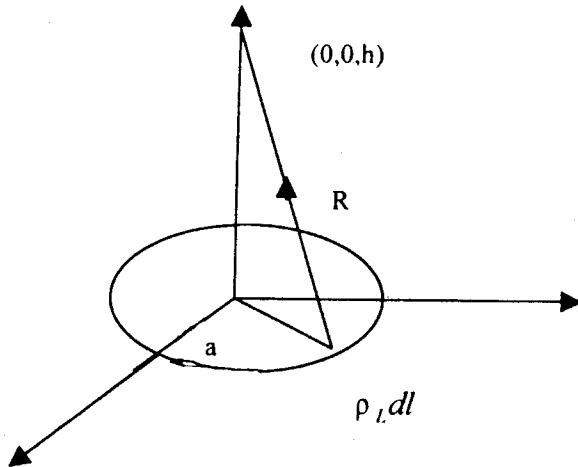

$$\bar{D} = \int \frac{\rho_L dl \bar{R}}{4\pi R^3}, \quad \bar{R} = -a\bar{a}_\rho + h\bar{a}_z$$

$$\bar{D} = \frac{\rho_L}{4\pi} \int_{\phi=0}^{\phi=2\pi} \frac{ad\phi(-a\bar{a}_\rho + h\bar{a}_z)}{(a^2 + h^2)^{3/2}}$$

Due to symmetry, the ρ component varies.

$$\bar{D} = \frac{\rho_L a (2\pi h) \bar{a}_z}{4\pi (a^2 + h^2)^{3/2}} = \frac{\rho_L a h \bar{a}_z}{2(a^2 + h^2)^{3/2}}$$

$$a = 2, \quad h = 3, \quad \rho_L = 5 \mu C/m$$

Since the ring is placed in $x = 0$, \bar{a}_z becomes \bar{a}_x .

$$\bar{D} = \frac{2(6)(5)\bar{a}_x}{2(4+9)^{3/2}} = \underline{\underline{0.64 \bar{a}_x \mu C/m^2}}$$

(b)

$$\begin{aligned} \bar{D}_Q &= \frac{Q}{4\pi} \frac{[(3,0,0) - (0,-3,0)]}{|(3,0,0) - (0,-3,0)|^3} + \frac{Q}{4\pi} \frac{[(3,0,0) - (0,3,0)]}{|(3,0,0) - (0,3,0)|^3} \\ &= \frac{Q(3,3,0)}{4\pi(18)^{3/2}} + \frac{Q(3,-3,0)}{4\pi(18)^{3/2}} = \frac{6Q}{4\pi(18)^{3/2}} \end{aligned}$$

$$\bar{D} = \bar{D}_R + \bar{D}_Q = 0$$

$$0.64(10^{-6}) + \frac{6Q}{4\pi(18)^{3/2}} = 0$$

$$\therefore Q = -0.64(4\pi)(18^{3/2})10^{-6} \frac{1}{6} = \underline{\underline{-102.4 \mu C}}$$

Prob. 4.11

Due to symmetry, \bar{E} has only z - component given by


$$\begin{aligned}
 dE_z &= dE \cos\alpha \\
 &= \frac{\rho_s dx dy}{4\pi\epsilon_0(x^2 + y^2 + h^2)} \frac{h}{(x^2 + y^2 + h^2)^{1/2}} \\
 E_z &= \frac{\rho_s h}{4\pi\epsilon_0} \int_{-a}^a \int_{-b}^b \frac{dxdy}{(x^2 + y^2 + h^2)^{3/2}} \\
 &= \frac{\rho_s h}{\pi\epsilon_0} \int_{-a}^a \int_{-b}^b \frac{dxdy}{(x^2 + y^2 + h^2)^{3/2}} \\
 &= \frac{\rho_s h}{\pi\epsilon_0} \int_0^a \frac{y dx}{(x^2 + h^2)(x^2 + y^2 + h^2)^{1/2}} \Big|_0^b \\
 &= \frac{\rho_s h}{\pi\epsilon_0} \int_0^a \frac{b dx}{(x^2 + h^2)(x^2 + b^2 + h^2)^{1/2}}
 \end{aligned}$$

By changing variables, we finally obtain

$$\begin{aligned}
 E_z &= \frac{\rho_s}{\pi\epsilon_0} \tan^{-1} \left\{ \frac{ab}{h(a^2 + b^2 + h^2)^{1/2}} \right\} \bar{a}_z \\
 &= 36(10^{-3})(0.0878 \text{ radians}) \bar{a}_z = \underline{\underline{31.61 \mu V/m}}
 \end{aligned}$$

Prob 4.12

$$\begin{aligned}
 \bar{E} &= \bar{E}_1 + \bar{E}_2 + \bar{E}_3 \\
 &= \frac{Q}{4\pi\epsilon_0 r^2} \bar{a}_r + \frac{\rho_L}{2\pi\epsilon_0 \rho} \bar{a}_\rho + \frac{\rho_s}{2\epsilon_0} \bar{a}_n \\
 &= \frac{100(10^{-12})}{4\pi(\frac{10^{-9}}{36\pi})} \left\{ \frac{(1,1,1) - (4,1,-3)}{|(1,1,1) - (4,1,-3)|^3} \right\} + \frac{2(10^{-9})}{2\pi(\frac{10^{-9}}{36\pi})} \left\{ \frac{(1,1,1) - (1,0,0)}{|(1,1,1) - (1,0,0)|^2} \right\} + \frac{5(10^{-9})}{2\pi(\frac{10^{-9}}{36\pi})} \bar{a}_z \\
 &= (-0.0216, 0, 0.0288) + (0, 18, 18) - 90\pi(0, 0, 1) \\
 &= \underline{\underline{-0.0216 \bar{a}_x + 18 \bar{a}_y - 264.7 \bar{a}_z \text{ V/m}}}
 \end{aligned}$$

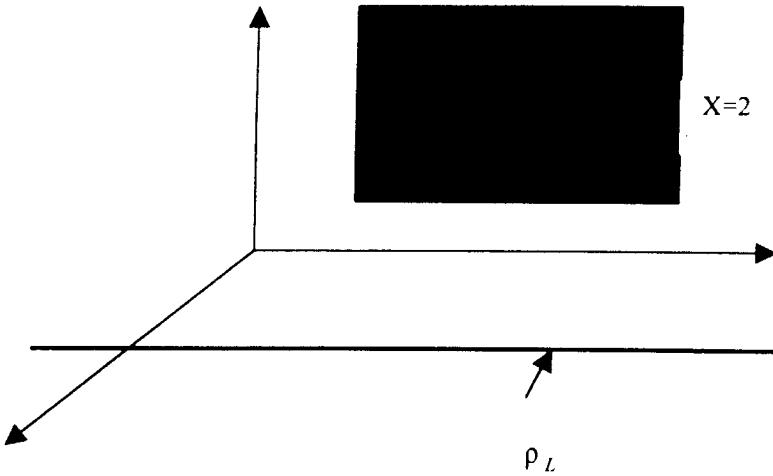Prob 4.13

$$\bar{E} = \frac{\rho_s}{2\epsilon_0} \bar{a}_n + \frac{\rho_L}{2\pi\epsilon_0\rho} \bar{a}_p$$

$$\bar{\rho} = (0,0,0) - (3,0,-1) = -3\bar{a}_x + \bar{a}_z$$

$$\begin{aligned}\bar{E} &= \frac{4(10^{-9})}{2(10^{-9}/36\pi)} (\bar{a}_x) + \frac{20(10^{-9})}{2\pi(10^{-9}/36\pi)} \frac{(-3\bar{a}_x + \bar{a}_z)}{(9+1)} \\ &= 72\pi \bar{a}_x + 36(-3\bar{a}_x + \bar{a}_z)\end{aligned}$$

$$\begin{aligned}\bar{F} &= q \bar{E} = -5(36) [(2\pi - 3)\bar{a}_x + \bar{a}_z] mN \\ &= -0.591 \bar{a}_x - 0.18 \bar{a}_z \text{ N}\end{aligned}$$

Prob 4.14

$$\begin{aligned}\bar{D} &= \sum_{k=1}^4 \frac{\bar{Q}_k(\bar{r} - \bar{r}_k)}{4\pi |\bar{r} - \bar{r}_k|^3} \\ \bar{D} &= \frac{Q}{4\pi} \left\{ \frac{2[(0,0,0) - (2,2,0)]}{|(0,0,0) - (2,2,0)|^3} - \frac{2[(0,0,0) - (-2,-2,0)]}{|(0,0,0) - (-2,-2,0)|^3} + \frac{[(0,0,6) - (-2,2,0)]}{|(0,0,6) - (-2,2,0)|^3} \right. \\ &\quad \left. - \frac{[(0,0,6) - (2,-2,0)]}{|(0,0,6) - (2,-2,0)|^3} \right\} \\ &= \frac{15}{4\pi} \left\{ \frac{2(-2,-2,6)}{44^{3/2}} - \frac{2(2,2,6)}{44^{3/2}} + \frac{2(2,-2,6)}{44^{3/2}} - \frac{2(-2,2,6)}{44^{3/2}} \right\} \\ &= \frac{15}{4\pi(44)^{3/2}} (-4, -12, 0) \text{ } \mu\text{C/m}^2 \\ &= -16.36 \bar{a}_x - 49.08 \bar{a}_y \text{ nC/m}^2\end{aligned}$$

Prob 4.15

Let Q_1 be located at the origin. At the spherical surface of radius r ,

$$Q_1 = \oint \bar{D} \cdot d\bar{S} = \epsilon E_r (4\pi r^2)$$

or

$$\bar{E} = \frac{Q_1}{4\pi\epsilon r^2} \bar{a}_r \quad \text{by Gauss's law.}$$

If a second charge Q_2 is placed on the spherical surface, Q_2 experiences a force:

$$\bar{F} = Q_2 \bar{E} = \frac{Q_1 Q_2}{4\pi\epsilon r^2} \bar{a}_r$$

which is Coulomb's law.

Prob. 4.16

(a)

$$\rho_V = \nabla \cdot \bar{D} = \frac{\partial D_x}{\partial x} + \frac{\partial D_y}{\partial y} + \frac{\partial D_z}{\partial z} = 8y + 0 = \underline{\underline{8y \text{ C/m}^3}}$$

(b)

$$\begin{aligned} \rho_V &= \nabla \cdot \bar{D} = \frac{1}{\rho} \frac{\partial}{\partial \rho} (\rho^2 \sin\phi) + \frac{1}{\rho} \frac{\partial}{\partial \phi} (2\rho \cos\phi) + \frac{\partial}{\partial z} (2z^2) \\ &= 2\sin\phi - 2\sin\phi + 4z = 4z \text{ C/m}^3 \end{aligned}$$

(c)

$$\begin{aligned} \rho_V &= \nabla \cdot \bar{D} = \frac{1}{r^2} \frac{\partial}{\partial r} \left(\frac{2}{r} \cos\theta \right) + \frac{1}{r^4 \sin\theta} \frac{\partial}{\partial \theta} (\sin^2 \theta) \\ &= \frac{-2}{r^3} \cos\theta + \frac{1}{r^4 \sin\theta} (2 \sin\theta \cos\theta) = 0 \end{aligned}$$

Prob 4.17


(a)

$$\bar{D} = \epsilon_0 (\bar{E}) = 10^{-9} \frac{I}{36\pi} (xy \bar{a}_x + x^2 \bar{a}_y)$$

$$\bar{D} = \underline{\underline{8.84 xy \bar{a}_x + 8.84 x^2 \bar{a}_y \text{ pC/m}^2}}$$

(b)

$$\begin{aligned} \rho_V &= \nabla \cdot \bar{D} = \frac{\partial D_x}{\partial x} + \frac{\partial D_y}{\partial y} + \frac{\partial D_z}{\partial z} \\ &= \underline{\underline{8.84 y \text{ pC/m}^3}} \end{aligned}$$

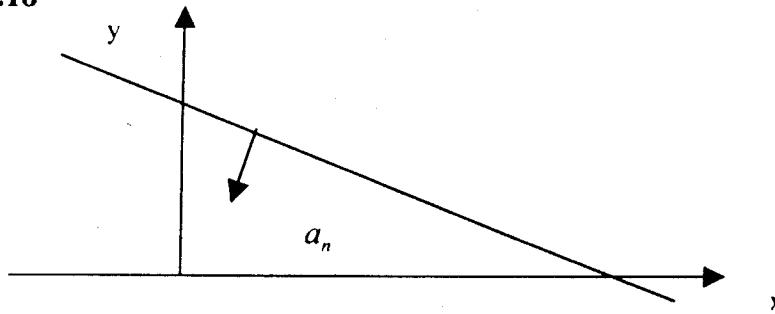Prob 4.18

$$\text{Let } f(x, y) = x + 2y - 5; \quad \nabla f = \bar{a}_x + 2\bar{a}_y$$

$$\bar{a}_n = \pm \frac{\nabla f}{|\nabla f|} = \pm \frac{(\bar{a}_x + 2\bar{a}_y)}{\sqrt{5}}$$

Since point (-1, 0, 1) is below the plane,

$$\bar{a}_n = - \frac{(\bar{a}_x + 2\bar{a}_y)}{\sqrt{5}}.$$

$$\begin{aligned}\bar{E} &= \frac{\rho_s}{2\epsilon_0} \bar{a}_n = \frac{6(10^{-9})}{2(10^{-9}/36\pi)} \left(- \frac{(\bar{a}_x + 2\bar{a}_y)}{\sqrt{5}}\right) \\ &= \underline{-151.7 \bar{a}_x - 303.5 \bar{a}_y \text{ V/m}}\end{aligned}$$

Prob 4.19

$$W = \frac{I}{2} \int \bar{D} \bullet \bar{E} dV = \frac{I}{2\epsilon_0} \int |\bar{D}|^2 dV \text{ nJ}$$

$$\begin{aligned}2\epsilon_0 W &= \iiint (4y^4 + 16x^2y^2 + I) dx dy dz \\ &= 4 \int_{x=0}^2 dx \int_{y=1}^2 y^4 dy \int_{z=-1}^4 dz + 16 \int_{x=1}^2 x^2 dx \int_{y=1}^2 y^2 dy \int_{z=-1}^4 dz + \int_{x=1}^2 dx \int_{x=-1}^2 dy \int_{z=-1}^4 dz \\ &= 4(3) \frac{y^5}{5} \Big|_1^2 (5) + 16 \left(\frac{x^3}{3}\right)^2 \Big|_1^2 (5) + (3)(3)(5) \\ &= 372 + 435.56 + 45 = 852.56\end{aligned}$$

Thus,

$$W = \frac{10^{-9}}{2(10^{-9}/36\pi)} (852.56) = 853.56 = \underline{5.357 \text{ kJ}}$$

For $S_1, \rho = 2, dS = \rho d\phi dz \bar{a}_\rho$

$$\begin{aligned}\psi_1 &= \iint 2\rho(z+I) \cos\phi \Big|_{\rho=2} = 2(2) \int_0^2 (z+I) dz \int_0^{\pi/2} \cos\phi d\phi \\ &= 4(12)(I) = 48\end{aligned}$$

For $S_2, z = 0, dS = \rho d\phi d\rho (-\bar{a}_z)$

$$\begin{aligned}\psi_2 &= - \iint \rho^2 \cos\phi \rho d\phi d\rho = - \int_0^2 \rho^3 d\rho \int_0^{\pi/2} \cos\phi d\phi \\ &= - \frac{\rho^4}{4} \Big|_0^2 (I) = -4\end{aligned}$$


For $S_3, z = I, d\bar{S} = \rho d\phi d\rho \bar{a}_z, \psi_3 = +4$

For $S_4, d = \pi/2, d\bar{S} = d\rho dz \bar{a}_\phi$

$$\begin{aligned}\psi_4 &= - \iint \rho(z-I) \sin\phi d\rho dz \Big|_{d=\pi/2} = (11) \int_0^2 \rho d\rho \int_0^{\pi/2} (z-I) dz \\ &= - \frac{\rho^2}{2} \Big|_0^2 (I2) = -(2)(12) = -24\end{aligned}$$

For $S_5, d = 0, d\bar{S} = d\rho dz (-\bar{a}_\phi), \psi_5 = \iint \rho(z+I) \sin\phi d\rho dz \Big|_{d=0} = 0$
 $\psi = 48 - 4 + 4 - 24 + 0 = \underline{\underline{24 \mu C}}$

Prob. 4.21

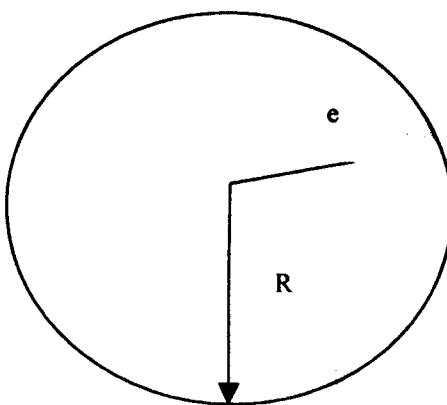

$$F = eE$$

$$\rho_0 = \frac{e}{4\pi} \frac{R^3}{\frac{3}{3}} = \frac{3e}{4\pi R^3}$$

$$\rho_r = \begin{cases} \rho_0, & 0 < r < R \\ 0, & \text{elsewhere} \end{cases}$$

$$\oint \bar{D} \cdot d\bar{S} = Q_{enc} = \int \rho_r dV = \frac{3e}{4\pi R^3} \frac{4\pi r^3}{3} = D_r(4\pi r^2)$$

$$E_r = \frac{3e r}{12\pi \epsilon_0 R^3}$$

$$F = eE = \frac{e^2 r}{4\pi \epsilon_0 R^3}$$

Prob 4.22

(a)

$$\psi = Q_{enc}$$

For $r = 1.5\text{m}$,

$$\begin{aligned} Q_{enc} &= \int \rho_{s1} ds = \rho_{s1} \int ds = \rho_{s1} (4\pi R^2) \\ &= 2(10^{-6})4\pi(I^2) = 8\pi(10^{-6}) \end{aligned}$$

$$\psi = Q_{enc} = \underline{\underline{25.13 \mu C}}$$

For $r = 2.5\text{m}$,

$$\begin{aligned} Q_{enc} &= \rho_{s1}(4\pi R_1^2) + \rho_{s2}(4\pi R_2^2) \\ &= 8\pi(10^{-6}) + (-4)10^{-6}(4\pi 2^2) \\ &= (8\pi - 64\pi)10^{-6} \end{aligned}$$

$$\psi = Q_{enc} = \underline{\underline{-175.93 \mu C}}$$

(b)

$$\psi = Q_{enc}, \quad \int \bar{D} \cdot d\bar{S} = Q_{enc}$$

$$D_r(4\pi r^2) = Q_{enc}$$

$$D_r = \frac{Q_{enc}}{4\pi r^2}$$

$$\text{Thus, } D_{\rho} = \begin{cases} 0, & \rho < 1, \quad 1 < \rho < 2 \\ \frac{8(\rho^3 - 1)}{2\rho}, & \rho > 2 \\ \frac{28}{\rho} \end{cases}$$

Prob 4.24

(a)

$$\psi = Q_{enc} \quad \text{at } r = 2$$

$$\begin{aligned} Q_{enc} &= \int \rho_V dV = \iiint \frac{10}{r^2} r^2 \sin\theta d\theta dr d\phi \\ &= 10 \int_{r=0}^2 \int_{\phi=0}^{2\pi} \int_{\theta=0}^{\pi} \sin\theta d\theta \\ &= 10(2)(2\pi)(2) = (80\pi) \text{ mC} \end{aligned}$$

$$\text{Thus, } \underline{\underline{\psi = 251.3 \text{ mC}}}$$

At $r = 6$;

$$\begin{aligned} Q_{enc} &= 10 \int_{r=0}^4 dr \int_{\phi=0}^{2\pi} d\phi \int_{\theta=0}^{\pi} \sin\theta d\theta \\ &= 10(4)(2\pi)(2) = 160\pi \end{aligned}$$

$$\underline{\underline{\psi = 502.6 \text{ mC}}}$$

(b)

$$\psi = Q_{enc}$$

$$\text{But } \psi = \oint \bar{D} \cdot d\bar{S} = D_r \oint dS = D_r (4\pi r^2)$$

At $r = 1$,

$$Q_{enc} = 10 \int_{r=0}^1 dr \int_{\phi=0}^{2\pi} d\phi \int_{\theta=0}^{\pi} \sin\theta d\theta$$

$$Q_{enc} = 10(1)(2\pi)(2) = 40\pi$$

Thus,

$$D_r = \frac{Q_{enc}}{4\pi r^2} = \frac{40\pi}{4\pi(1)} = 10$$

$$\underline{\underline{\bar{D} = 10 \bar{a}_r \text{ nC/m}^2}}$$

(c)

$$\frac{-W_{CD}}{q} = \int_{z=0}^{-2} \rho \sin\phi \, dz \Big|_{\substack{\phi=30^\circ \\ \rho=4}} = 4 \sin 30^\circ (z \Big|_0^{-2}) = -4$$

$$W_{CD} = 4q = \underline{\underline{16 \text{ nJ}}}$$

(d)

$$W_{AD} = W_{AB} + W_{BC} + W_{CD} = 0 - 8 + 16 = \underline{\underline{8 \text{ nJ}}}$$

Prob. 4.27

(a)

From A to B , $d\bar{l} = r d\theta \bar{a}_\theta$,

$$W_{AB} = -Q \int_{\theta=30^\circ}^{90^\circ} 10r \cos\theta \, r d\theta \Big|_{r=5} = \underline{\underline{-1250 \text{ nJ}}}$$

(b)

From A to C , $d\bar{l} = dr \bar{a}_r$,

$$W_{AC} = -Q \int_{r=5}^{10} 20r \sin\theta \, dr \Big|_{\theta=30^\circ} = \underline{\underline{-3750 \text{ nJ}}}$$

(c)

From A to D , $d\bar{l} = r \sin\theta d\phi \bar{a}_\phi$,

$$W_{AD} = -Q \int 0(r \sin\theta) d\phi = \underline{\underline{0 \text{ J}}}$$

(d)

$$W_{AE} = W_{AD} + W_{DF} + W_{FE}$$

where F is $(10, 30, 60)$. Hence,

$$\begin{aligned} W_{AE} &= -Q \left\{ \int_{r=5}^{10} 20r \sin\theta \, dr \Big|_{\theta=30^\circ} + 10 \int_{\theta=30^\circ}^{90^\circ} 10r \cos\theta \, r d\theta \Big|_{r=10} \right\} \\ &= -100 \left[\frac{75}{2} + \frac{100}{2} \right] \text{ nJ} = \underline{\underline{-8750 \text{ nJ}}} \end{aligned}$$

Prob 4.28

$$W = qV_{AB} = q(V_B - V_A)$$

$$= 2(10^{-6}) [2(1)(-3) - 1(1)(2)] = \underline{\underline{-16 \mu J}}$$

(b)

$$V_Q = \sum \frac{Q_k}{4\pi\epsilon_0 |\bar{r}_p - \bar{r}_k|}$$

$$4\pi\epsilon_0 V_Q = \frac{10^{-3}}{|(1,2,3) - (0,0,4)|} + \frac{-2(10^{-3})}{|(1,2,3) - (-2,5,1)|} + \frac{3(10^{-3})}{|(1,2,3) - (3,-4,6)|}$$

$$4\pi\epsilon_0 (10^3) V_p = \frac{1}{|(1,2,-1)|} - \frac{2}{|(3,-3,2)|} + \frac{3}{|(-2,6,-3)|} = \frac{1}{\sqrt{6}} - \frac{2}{\sqrt{22}} + \frac{3}{\sqrt{7}}$$

$$4\pi \frac{10^{-9}}{36\pi} (10^3) V_p = 0.410$$

$$V_Q = \underline{\underline{3.694 (10^6) \text{ V}}}$$

$$\therefore V_{pQ} = V_Q - V_p = 0.69(10^6) = \underline{\underline{694 \text{ kV}}}$$

Prob 4.31

(a)

$$\begin{aligned} \bar{E} &= -\left(\frac{\partial V}{\partial x}\bar{a}_x + \frac{\partial V}{\partial y}\bar{a}_y + \frac{\partial V}{\partial z}\bar{a}_z\right) \\ &= -2xy(z+3)\bar{a}_x - x^2(z+3)\bar{a}_y - x^2y\bar{a}_z \end{aligned}$$

$$\text{At } (3,4,-6), \quad x = 2, \quad y = 4, \quad z = -6,$$

$$\begin{aligned} \bar{E} &= -2(3)(4)(-3)\bar{a}_x - 9(-3)\bar{a}_y - 9(4)\bar{a}_z \\ &= \underline{\underline{72\bar{a}_x + 27\bar{a}_y - 36\bar{a}_z \text{ V/m}}} \end{aligned}$$

(b)

$$\rho_V = \nabla \bullet \bar{D} = \epsilon_0 \nabla \bullet \bar{E} = -\epsilon_0 (2y)(z+3)$$


$$\begin{aligned} \psi = Q_{enc} &= \int \rho_V dV = -2\epsilon_0 \iiint y(z+3) dx dy dz \\ &= -2\epsilon_0 \int_0^l dx \int_0^l y dy \int_0^l (z+3) dz = -2\epsilon_0 (l)(l/2) \left(\frac{z^2}{2} + 3z\right) \Big|_0^l \end{aligned}$$

$$= -\epsilon_0 \left(\frac{l}{2} + 3\right) = \frac{-7}{2} \left(\frac{10^{-9}}{36\pi}\right)$$

$$Q_{enc} = \underline{\underline{-30.95 \text{ pC}}}$$

$$\begin{aligned}
 \oint \vec{E} \cdot d\vec{l} &= \int_{x=0}^2 yz dx \Big|_{y=0, z=1} + \int_{y=0}^2 xz dy \Big|_{z=1, x=2} + \int_0^0 yz dx \Big|_{y=2, z=1, x=2} + \int_0^0 xz dy \Big|_{y=2, z=1, x=0} \\
 (b) \quad &= 2y \Big|_0^2 + 2x \Big|_0^2 = 4 - 4 = \underline{\underline{0}}
 \end{aligned}$$

Prob. 4.34 (a)

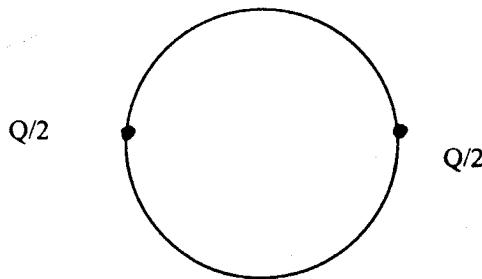

$$\begin{aligned}
 V &= \frac{2 \frac{Q}{2}}{4\pi\epsilon_0 r} = \frac{Q}{4\pi\epsilon_0 r} \\
 &= \frac{60(10^{-6})}{4\pi(10^{-9}) \frac{1}{36\pi}} = \underline{\underline{15 \text{ kV}}}
 \end{aligned}$$

(b)

$$V = \frac{3(\frac{Q}{3})}{4\pi\epsilon_0 r} = \underline{\underline{15 \text{ kV}}}$$

(c)

$$V = \int \frac{\rho_L}{4\pi\epsilon_0 r} = \frac{Q}{4\pi\epsilon_0 r} = \underline{\underline{15 \text{ kV}}}$$

Prob 4.35 (a)

For $r \geq a$,

$$Q_{enc} = \iiint \rho_r dV = \iiint \rho_\theta (a^2 - r^2) r^2 \sin\theta d\theta d\phi dr$$

$$Q_{enc} = \rho_\theta \int_0^\pi \sin\theta d\theta \int_0^{2\pi} d\phi \int_a^a (a^2 r^2 - r^4) dr$$

$$\frac{2\rho_0}{15\epsilon_0 a} = \frac{\rho_0}{\epsilon_0} \left(\frac{a^4}{20} - \frac{a^4}{6} \right) + C_2 \quad \longrightarrow \quad C_2 = \frac{2\rho_0}{15\epsilon_0 a} + \frac{7\rho_0 a^4}{60\epsilon_0}$$

$$V = \frac{\rho_0}{\epsilon_0} \left(\frac{r^4}{20} - \frac{a^2 r^2}{6} \right) + \frac{2\rho_0}{15\epsilon_0} + \frac{7\rho_0 a^4}{60\epsilon_0}$$

(c)

The total charge is found in part (a) as

$$Q = \frac{8\pi\rho_0}{15}$$

(d)

For $r \geq a$, \bar{E} decays to zero with no maxima.

For $r \leq a$,

$$E_r = \frac{\rho_0}{\epsilon_0} \left(\frac{a^2 r}{3} - \frac{r^3}{5} \right)$$

$$\frac{\partial E_r}{\partial r} = \frac{\rho_0}{\epsilon_0} \left(\frac{a^2}{3} - \frac{3r^2}{5} \right) = 0 \quad \longrightarrow \quad r = \frac{a\sqrt{5}}{3}$$

$$r = \underline{\underline{0.7453a}}$$

Prob 4.36

$m \frac{d^2 y}{dt^2} = eE$; divide by m , and integrate once, one obtains:

$$u \frac{dy}{dt} = \frac{eEt}{m} + c_0$$

$$y = \frac{eEt^2}{2m} + c_0 t + c_1 \quad (1)$$

"From rest" implies $c_1 = 0 = c_0$

$$\text{At } t = t_0, \quad y = d, \quad E = \frac{V}{d} \quad \text{or} \quad V = Ed.$$

Substituting this in (1) yields:

$$t^2 = \frac{2m d}{e E}$$

Hence:

$$u = \frac{eE}{m} \sqrt{\frac{2md}{eE}} = \sqrt{\frac{2eE}{m}}$$

that is, $u \propto \sqrt{V}$

or $u = k \sqrt{V}$

(b)

$$\begin{aligned} k &= \sqrt{\frac{2e}{m}} = \sqrt{\frac{2(1.603)10^{-19}}{9.1066(10^{-31})}} \\ &= \underline{\underline{5.933(10^5)}} \end{aligned}$$

(c)

$$V = \frac{u^2 m}{2e} = \frac{9(10^{16})}{2(176)(10^{11})} \frac{1}{100} = \underline{\underline{2557 \text{ kV}}}$$

Prob 4.37

(a)

This is similar to Example 4.3.

$$u_y = \frac{eEt}{m}, \quad u_x = u_0$$

$$y = \frac{eEt^2}{2m}, \quad x = u_0 t$$

$$t = \frac{x}{u_0} = \frac{10(10^{-2})}{10^7} = 10 \text{ ns}$$

Since $x = 10 \text{ cm}$ when $y = 1 \text{ cm}$,

$$E = \frac{2my}{et^2} = \frac{2(10^{-2})}{1.76(10^{11})(10^{-16})} = 1.136 \text{ kV/m}$$

$$E = \underline{\underline{-1.136 a_y \text{ kV/m}}}$$

(b)

$$u_x = u_0 = 10^7,$$

$$u_y = \frac{2000}{1.76}(1.76)10^{11}(10^{-8}) = 2(10^6)$$

$$\bar{u} = \underline{\underline{(a_x + 0.2a_y)(10^7) \text{ m/s}}}$$

Prob 4.38

$$V = \frac{p \cos\theta}{4\pi \epsilon_0 r} = \frac{k \cos\theta}{r}$$

At $(0, 1 \text{ nm})$, $\theta = 0$, $r = 1 \text{ nm}$, $V = 9$;

$$\text{that is, } 9 = \frac{k(1)}{1(10^{-18})}, \quad \therefore k = 9(10^{-18})$$

$$V = 9(10^{-18}) \frac{\cos\theta}{r}$$

At $(1, 1) \text{ nm}$, $r = \sqrt{2} \text{ nm}$, $\theta = 45^\circ$,

$$V = \frac{9(10^{-18}) \cos 45^\circ}{10^{-18} \sqrt{2}} = \frac{9}{2\sqrt{2}} = \underline{\underline{3.182 \text{ V}}}$$

Prob 4.39

The dipole is oriented along y -axis.

$$V = \frac{\bar{p} \cdot \bar{r}}{4\pi \epsilon_0 r^2}; \quad \bar{p} \cdot \bar{r} = Qd \bar{a}_y \cdot \bar{a}_r = Qd \sin\theta \sin\phi$$

$$V = \frac{Qd \sin\theta \sin\phi}{4\pi \epsilon_0 r^2}$$

$$\begin{aligned} \bar{E} &= -\nabla V = -\frac{\partial V}{\partial r} \bar{a}_r - \frac{1}{r} \frac{\partial V}{\partial \theta} \bar{a}_\theta - \frac{1}{r \sin\theta} \frac{\partial V}{\partial \phi} \bar{a}_\phi \\ &= \frac{Qd}{4\pi \epsilon_0} \left\{ \frac{2 \sin\theta \sin\phi}{r^3} \bar{a}_r - \frac{\cos\theta \sin\phi}{r^3} \bar{a}_\theta - \frac{\cos\theta}{r^3} \bar{a}_\phi \right\} \\ \bar{E} &= \frac{Qd}{4\pi \epsilon_0} (2 \sin\theta \sin\phi \bar{a}_r - \cos\theta \sin\phi \bar{a}_\theta - \cos\phi \bar{a}_\phi) \end{aligned}$$

Prob 4.40

$$\begin{aligned} W &= Q_2 V_{21} = Q_2 \frac{Q_1}{4\pi \epsilon_0 |\bar{r}_2 - \bar{r}_1|} \\ &= \frac{-2(1)(10^{-6})}{4\pi \left(\frac{10^{-9}}{36\pi}\right) |(5, -10, -1)|} = \frac{-18(10^{-3})}{\sqrt{126}} \end{aligned}$$

$$W = \underline{\underline{-1.604}}$$

Prob 4.41

$$W = \frac{I}{2} \int \bar{D} \cdot \bar{E} dV = \frac{\epsilon_0}{2} \int |\bar{E}| dV,$$

$$\bar{E} = \frac{Q}{4\pi r^2} \hat{a}_r,$$

$$W = \frac{\epsilon_0}{2} \iiint \frac{Q^2}{16\pi^2\epsilon_0 r^4} (r^2 \sin\theta dr d\theta d\phi)$$

$$W = \frac{Q^2}{32\pi^2\epsilon_0} 4\pi \int_a^x \frac{1}{r^2} dr = \underline{\underline{\frac{Q^2}{8\pi\epsilon_0 a}}}$$

Prob 4.42

$$\begin{aligned}
 W &= \frac{I}{2} \epsilon_0 \int |\bar{E}|^2 dV = \frac{I}{2} \epsilon_0 \iiint (4r^2 \sin^2\theta \cos^2\phi + r^2 \cos^2\theta \cos^2\phi + r^2 \sin^2\phi) r^2 \sin\theta d\theta d\phi \\
 &= \frac{I}{2} \epsilon_0 \int r^4 dr \left\{ 4 \int_0^{2\pi} \cos^2\phi d\phi \int_0^\pi \sin^3\theta d\theta + \int_0^{2\pi} \cos^2\phi d\phi \int_0^\pi \cos\theta \sin\theta d\theta \right. \\
 &\quad \left. + \int_0^{2\pi} \sin^2\phi d\phi \int_0^\pi \sin\theta d\theta \right\} \\
 &= \frac{I}{2} \epsilon_0 \left[\frac{r^5}{5} \Big|_0^2 \left\{ 4 \left(\frac{1}{2} \right) (2\pi) \int_0^\pi (1 - \cos^2\theta) d(-\cos\theta) \right. \right. \\
 &\quad \left. \left. + \frac{1}{2} (2\pi) \int_0^\pi \cos^2\theta d(-\cos\theta) + \frac{1}{2} (2\pi) (-\cos\theta) \Big|_0^\pi \right\} \right] \\
 &= 3.2 \epsilon_0 [4\pi \left(\frac{\cos^3\theta}{3} - \cos\theta \right) \Big|_0^\pi + \pi \left(-\frac{\cos^3\theta}{3} \right) \Big|_0^\pi + 2\pi] \\
 &= 3.2 \epsilon_0 (8\pi) = 25.6 \pi \frac{10^{-9}}{36\pi} \\
 W &= \underline{\underline{0.7111 \text{ nJ}}}
 \end{aligned}$$

Prob 4.43

$$\bar{E} = -\nabla V = -\left(\frac{\partial V}{\partial \rho}\bar{a}_\rho + \frac{I}{\rho}\frac{\partial V}{\partial \phi}\bar{a}_\phi + \frac{\partial V}{\partial z}\bar{a}_z\right)$$

$$\bar{E} = -(\rho z \sin\phi \bar{a}_\rho + \rho z \cos\phi \bar{a}_\phi + \rho^2 \sin\phi \bar{a}_z)$$

$$W = \frac{I}{2}\epsilon_0 \int |\bar{E}|^2 dV = \iiint (4\rho^2 z^2 \sin^2\phi + \rho^2 z^2 \cos^2\phi + \rho^4 \sin^2\phi) \rho d\phi dz d\rho$$

$$\begin{aligned} \frac{2W}{\epsilon_0} &= 4 \int_1^4 \rho^3 dz \int_{-2}^2 z^2 dz \int_0^{\pi/3} \sin^2\phi d\phi + \int_1^4 \rho^3 d\rho \int_{-2}^2 z^2 dz \int_0^{\pi/3} \cos^2\phi d\phi \\ &\quad + \int_1^4 \rho^5 d\rho \int_{-2}^2 dz \int_0^{\pi/3} \sin^2\phi d\phi \end{aligned}$$

$$\text{But } \int_0^{\pi/3} \cos^2\phi d\phi = \frac{1}{2} \int_0^{\pi/3} [1 + \cos 2\phi] d\phi = \frac{\pi}{6} + \frac{1}{4} \sin \frac{2\pi}{3} = 0.7401$$

$$\int_0^{\pi/2} \sin^2\phi d\phi = \frac{1}{2} \int_0^{\pi/2} (1 - \cos 2\phi) d\phi = \frac{\pi}{6} - \frac{1}{4} \sin^2 \frac{\pi}{3} = 0.3071$$

$$\begin{aligned} \frac{2W}{\epsilon_0} &= \frac{4}{4} \rho^4 \left| \frac{2z^2}{3} \right|_0^2 (0.3071) + \frac{\rho^4}{4} \left| \frac{2z^3}{3} \right|_0^2 (0.7401) + \frac{\rho^6}{6} \left| (4)(0.3071) \right| \\ &= 255 \left(\frac{16}{3} \right) (0.3071) + \frac{255}{4} \left(\frac{16}{3} \right) (0.7401) + \frac{4096}{6} (0.3071) \\ &= 417.67 + 239.394 + 838.59 = 1495.6 \end{aligned}$$

$$\begin{aligned} W &= \frac{1495.6}{2} \left(\frac{10^{-9}}{36\pi} \right) \\ &= \underline{\underline{6.612 \text{ nJ}}} \end{aligned}$$

CHAPTER 5

P. E. 5.1 $d\mathbf{S} = \rho d\phi dz a_\rho$

$$I = \int J \bullet d\mathbf{S} = \int_{\phi=0}^{2\pi} \int_{z=1}^5 10z \sin^2 \phi \rho dz d\phi |_{\rho=2} = 10(2) \frac{z^2}{2} \Big|_1^5 \int_{\phi=0}^{2\pi} (1 - \cos 2\phi) d\phi = 240\pi$$

I = 754 A

P. E. 5.2

$$I = \rho_s w u = 0.5 \times 10^{-6} \times 0.1 \times 10 = 0.5 \mu \text{A}$$


$$V = IR = 10^{14} \times 0.5 \times 10^{-6} = \underline{\underline{50 \text{ MV}}}$$

P. E. 5.3 $\sigma = 5.8 \times 10^7 \text{ S/m}$

$$J = \sigma E \quad \longrightarrow \quad E = \frac{J}{\sigma} = \frac{8 \times 10^6}{5.8 \times 10^7} = \underline{\underline{0.138 \text{ V/m}}}$$

$$J = \rho_v u \quad \longrightarrow \quad u = \frac{J}{\rho_v} = \frac{8 \times 10^6}{1.81 \times 10^{10}} = \underline{\underline{4.42 \times 10^{-4} \text{ m/s}}}$$

P. E. 5.4 The composite bar can be modeled as a parallel combination of resistors as shown below.

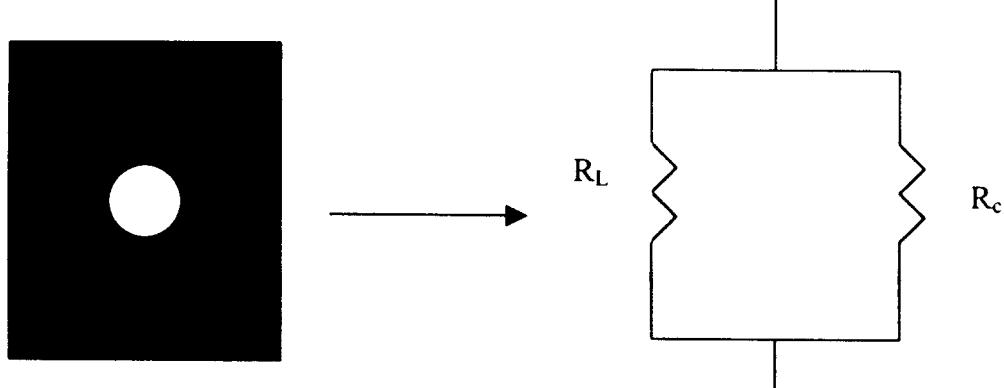

For the lead, $R_L = \frac{l}{\sigma_L S_L}, \quad S_L = d^2 - \pi r^2 = 9 - \frac{\pi}{4} \text{ cm}^2$

$$R_L = 0.974 \text{ m}\Omega$$

For copper, $R_c = \frac{l}{\sigma_c S_c}, \quad S_c = \pi r^2 = \frac{\pi}{4} \text{ cm}^2$

$$R_c = \frac{4}{5.8 \times 10^7 \times \frac{\pi}{4} \times 10^{-4}} = 0.8781 \text{ m}\Omega$$

$$R_c = \frac{R_L R_c}{R_L + R_c} = \frac{0.974 \times 0.8781}{0.974 + 0.8781} = \underline{\underline{461.7 \mu\Omega}}$$

P. E. 5.5 $\rho_{ps} = P \bullet a_x = ax^2 + b$

$$\rho_{ps} \Big|_{x=0} = P \bullet (-a_x) \Big|_{x=0} = \underline{\underline{-b}}$$

$$\rho_{ps} \Big|_{x=L} = P \bullet a_x \Big|_{x=L} = \underline{\underline{aL^2 + b}}$$

$$Q_s = \int \rho_{ps} dS = -bA + (aL^2 + b)A = AaL^2$$

$$\rho_{pv} = -\nabla \cdot P = -\frac{d}{dx}(ax^2 + b) = -2ax$$

$$\rho_{pv} \Big|_{x=0} = \underline{\underline{0}}, \quad \rho_{pv} \Big|_{x=L} = \underline{\underline{-2aL}}$$

$$Q_v = \int \rho_{pv} dv = \int_0^L (-2ax) A dx = -AaL^2$$

Hence,

$$Q_T = Q_v + Q_s = -AaL^2 + AaL^2 = 0$$

P. E. 5.6

$$E = \frac{V}{d} a_x = \frac{10^3}{2 \times 10^{-3}} a_x = 500 a_x \text{ kV/m}$$

$$P = \chi_e \epsilon_o E = (2.25 - 1) \times \frac{10^{-9}}{36\pi} \times 0.5 \times 10^6 a_x = \underline{\underline{6.853 a_x \mu C / m^2}}$$

$$\rho_{ps} = P \bullet a_x = \underline{\underline{6.853 \mu C / m^2}}$$

P. E. 5.7 (a) Since $P = \epsilon_o \chi_e E$, $P_x = \epsilon_o \chi_e E_x$

$$\chi_e = \frac{P_x}{\epsilon_o E_x} = \frac{3 \times 10^9}{10\pi} \frac{1}{5} \times 36\pi \times 10^9 = \underline{\underline{2.16}}$$

$$(b) E = \frac{P}{\chi_e \epsilon_0} = \frac{36\pi \times 10^9}{2.16} \frac{1}{10\pi} (3, -1, 4) 10^{-9} = \underline{\underline{5a_x - 1.67a_y + 6.67a_z}} \text{ V/m}$$

(c)

$$D = \epsilon_0 \epsilon_r E = \frac{\epsilon_r P}{\chi_e} = \frac{3.16}{2.16} \left(\frac{1}{10\pi} \right) (3, -1, 4) \text{ nC/m}^2 = \underline{\underline{139.7a_x - 46.6a_y + 186.3a_z}} \text{ pC/m}^2$$

P. E. 5.8 From Example 5.8,

$$F = \frac{\rho_s^2 S}{2\epsilon_0} \longrightarrow \rho_s^2 = \frac{2\epsilon_0 F}{S}$$

But $\rho_s = \epsilon_0 E = \epsilon_0 \frac{V_d}{d}$. Hence

$$\rho_s^2 = \frac{2\epsilon_0 F}{S} = \frac{\epsilon_0^2 V_d^2}{d^2} \longrightarrow V_d^2 = \frac{2Fd^2}{\epsilon_0 S}$$

i.e.

$$V_d = V_1 - V_2 = \sqrt{\frac{2Fd^2}{\epsilon_0 S}}$$

as required.

P. E. 5.9 (a) Since $a_n = a_x$,


$$D_{ln} = 12a_x, \quad D_{lt} = -10a_x + 4a_z, \quad D_{2n} = D_{ln} = 12a_x$$

$$E_{2t} = E_{lt} \longrightarrow D_{2t} = \frac{\epsilon_2 D_{lt}}{\epsilon_1} = \frac{1}{2.5} (-10a_y + 4a_z) = -4a_y + 1.6a_z$$

$$D_2 = D_{2n} + D_{2t} = \underline{\underline{-12a_x - 4a_y + 1.6a_z}} \text{ nC/m}^2$$

$$(b) \tan \theta_2 = \frac{D_{2t}}{D_{2n}} = \frac{\sqrt{(-4)^2 + (1.6)^2}}{12} = 0.359 \longrightarrow \underline{\underline{\theta_2 = 19.75^\circ}}$$

$$(c) E_{lt} = E_{2t} \sin \theta_2 = 12 \sin 60^\circ = 10.392$$

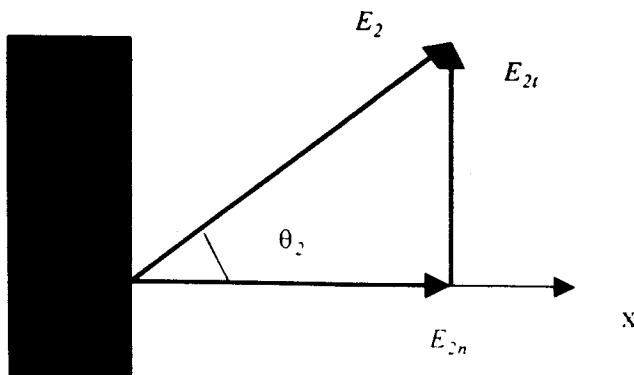

$$E_{1n} = \frac{\epsilon_r 2}{\epsilon_{r1}} E_{2n} = \frac{I}{2.5} I 2 \cos 60^\circ = 2.4$$

$$E_I = \sqrt{E_{1n}^2 + E_{2n}^2} = \underline{10.67}$$

$$\tan \theta_1 = \frac{\epsilon_{r1}}{\epsilon_{r2}} \tan \theta_2 = \frac{2.5}{I} \tan 60^\circ = 4.33 \quad \longrightarrow \quad \underline{\underline{\theta_1 = 77^\circ}}$$

Note that $\theta_1 > \theta_2$.

P. E. 5.10

$$D = \epsilon_0 E = \frac{10^{-9}}{36\pi} (60, 20, -30) \times 10^{-3} = \underline{0.531a_x + 0.177a_y - 0.265a_z \text{ pC/m}^2}$$

$$\rho_s = D_n = |D| = \frac{10^{-9}}{36\pi} (10) \sqrt{36 + 4 + 9} (10^{-3}) = \underline{0.619 \text{ pC/m}^2}$$

Prob. 5.1

$$I = \int J \bullet dS, \quad dS = r \sin \theta d\phi dr a_\theta$$

$$I = - \int_{r=0}^2 \int_{\phi=0}^{2\pi} r^3 \sin^2 \theta d\phi dr \Big|_{\theta=30^\circ} = -(\sin 30^\circ)^2 \left. \frac{r^4}{4} \right|_0^2 (2\pi) = -2\pi = \underline{-6.283 \text{ A}}$$

Prob. 5.2

$$I = \int J \bullet dS = \int_{\rho=0}^a \int_{\phi=0}^{2\pi} \frac{500}{\rho} \rho d\phi d\rho = 500(2\pi a) = 1000\pi \times 1.6 \times 10^{-3} = 1.6\pi = \underline{5.026 \text{ A}}$$

Prob. 5.3

$$I = \int J \bullet dS = 10 \int_{\rho=0}^a \int_{\phi=0}^{2\pi} e^{-(l-\rho/a)} \rho d\phi d\rho = 20\pi \int_{\rho=0}^a \rho e^{-(l-\rho/a)} d\rho$$

$$\text{But } \int x e^{ax} dx = \frac{e^{ax}}{a^2} (ax - l),$$

$$I = 20\pi e^{-t} a^2 \left(\frac{\rho}{a} - I \right) e^{\rho/a} \Big|_0^a = \frac{20\pi a^2}{e} (1 + 0) = \underline{\underline{23.11a^2}} \text{ A}$$

Prob. 5.4

$$I = \frac{dQ}{dt} = -3x10^{-4}e^{-3t}$$

$$I(t=0) = -0.3 \text{ mA}, \quad I(t=2.5) = -0.3 e^{-7.5} = -1.66 \text{ nA}$$

Prob. 5.5 (a) $\nabla^2 V = -\rho_v / \epsilon$

$$\nabla^2 V = \frac{\partial}{\partial x}(2xy^2 z) + \frac{\partial}{\partial y}(2x^2 yz) = 6xyz$$

$$\rho_v = -8xyz(2\epsilon_0) = \underline{\underline{-16xyz\epsilon_0}}$$

$$(b) J = \rho_v u = -16xy^2 z\epsilon_0 (10^4) a_y$$

$$I = \int J \cdot dS = -16(10^4) \frac{10^{-9}}{36\pi} \int_0^{0.5} x dx \int_0^{0.5} zdz = -16(36\pi)(10^{-5}) \left(\frac{x^2}{2} \Big|_0^{0.5} \right)^2$$

$$I = -4(36\pi)(10^{-5})(0.5)^2 = \underline{\underline{-1.131}} \text{ mA}$$

$$\text{Prob. 5.6 (a)} \quad R = \frac{l}{\sigma S} = \frac{8 \times 10^{-2}}{3 \times 10^4 \times \pi \times 25 \times 10^{-6}} = \frac{8}{75\pi} = \underline{\underline{33.95 \text{ m}\Omega}}$$

$$(b) I = V / R = 9 \times \frac{75\pi}{8} = \underline{\underline{265.1}} \text{ A}$$

$$(c) P = IV = 2.386 \text{ kW}$$

$$\text{Prob. 5.7 (a)} \quad R = \frac{\rho l}{S} \quad \longrightarrow \quad \rho = RS/l = \frac{4.04 \pi d^2}{10^3 \cdot 4} = 2.855 \times 10^{-8}$$

$$\sigma = 1/\rho = \underline{\underline{3.5 \times 10^7}} \text{ S/m (Aluminum)}$$

$$(b) J = I/S = \frac{40}{\pi \times 90 \times 10^{-6}} = \underline{\underline{5.66 \times 10^6 \text{ A/m}^2}}$$

or

$$J = \sigma E = 3.5 \times 0.1616 \times 10^7 = 5.66 \times 10^6 \text{ A/m}^2$$

Prob. 5.8

$$R = \frac{l}{\sigma S}, \quad S = \pi r^2 = \pi d^2 / 4, \quad d = 0.4 \text{ mm}, \quad l = N 2\pi R = N \pi D, \quad D = 6.5 \text{ mm}$$

$$R = \frac{150 \times \pi (6.5) \times 10^{-3}}{5.8 \times 10^7 \times \pi \frac{(0.4)^2}{4} \times 10^{-6}} = \underline{\underline{0.42 \Omega}}$$

Prob. 5.9 (a) $R = \frac{\rho_c l}{S_i}, \quad S_i = \pi r_i^2 = \pi (1.5)^2 \times 10^{-4} = 2.25\pi \times 10^{-4}$

$$S_o = \pi (r_o^2 - r_i^2) = \pi (4 - 2.25) \times 10^{-4} = 1.75\pi \times 10^{-4}$$

$$R = R_i // R_o = \frac{R_i R_o}{R_i + R_o} = \left(\frac{\frac{\rho_i}{S_i} \frac{\rho_o}{S_o}}{\frac{\rho_i}{S_i} + \frac{\rho_o}{S_o}} \right) l = 10 \left(\frac{\frac{1.77 \times 11.8 \times 10^{-16}}{2.25\pi \times 1.75\pi \times 10^{-8}}}{\frac{1.77 \times 10^{-8}}{1.75\pi \times 10^{-4}} + \frac{11.8 \times 10^{-8}}{2.25\pi \times 10^{-4}}} \right) = \underline{\underline{0.27 \text{ m}\Omega}}$$

(b) $V = I_i R_i = I_o R_o \longrightarrow \frac{I_i}{I_o} = \frac{R_o}{R_i} = \frac{0.3219}{1.669} = 0.1929$

$$I_i + I_o = 1.1929 I_o = 60 \text{ A}$$

$$I_o = \underline{\underline{50.3 \text{ A}}} \quad (\text{copper}), \quad I_i = \underline{\underline{9.7 \text{ A}}} \quad (\text{steel})$$

(c) $R = \frac{10 \times 1.77 \times 10^{-8}}{1.75\pi \times 10^{-4}} = \underline{\underline{0.322 \text{ m}\Omega}}$

Prob. 5.10

$$R = \frac{l}{\sigma S} = \frac{h}{\sigma \pi (b^2 - a^2)} = \frac{2}{10^5 \pi (25 - 9) \times 10^{-4}} = \underline{\underline{4 \text{ m}\Omega}}$$

Prob. 5.11

$$|P| = n|p| = nQd = 2ned = \chi_e \epsilon_o E \quad (Q = 2e)$$

$$\chi_e = \frac{2ned}{\epsilon_o E} = \frac{2 \times 5 \times 10^{25} \times 1.602 \times 10^{-19} \times 10^{-18}}{\frac{10^{-9}}{36\pi} \times 10^4} = 0.000182$$

$$\epsilon_r = 1 + \chi_e = \underline{\underline{1.000182}}$$

Prob. 5.12

$$P = \frac{\sum_{i=1}^N q_i d_i}{V} = \frac{\sum_{i=1}^N p_i}{V}$$

$$|P| = \frac{N}{V} |p| = 2 \times 10^{19} \times 1.8 \times 10^{-27} = 3.6 \times 10^{-18}$$

$$P = |P| a_x = \underline{\underline{3.6 \times 10^{-18} a_x \text{ C/m}^2}}$$

$$\text{But } P = \chi_e \epsilon_0 E \quad \text{or} \quad \chi_e = \frac{P}{\epsilon_0 E} = \frac{3.6 \times 36 \pi \times 10^9 \times 10^{-18}}{10^5} = 0.0407$$

$$\epsilon_r = 1 + \chi_e = \underline{\underline{1.0407}}$$

$$\text{Prob. 5.13 (a)} \quad E = -\nabla V = -\frac{dV}{dz} a_z = 600 z a_z$$

$$D = \epsilon_0 \epsilon_r E = \frac{10^{-9}}{36\pi} (2.4) 600 z a_z = \underline{\underline{12.73 z a_z \text{ nC/m}^2}}$$

$$\rho_v = \nabla \bullet D = \frac{\partial D_z}{\partial z} = \underline{\underline{12.73 \text{ nC/m}^3}}$$

$$(b) \quad \chi_e = \epsilon_r - 1 = 1.4$$

$$P = \chi_e \epsilon_0 E = \frac{\chi_e D}{\epsilon_r} = \frac{1.4}{2.4} (12.732) a_z = \underline{\underline{7.427 a_z \text{ nC/m}^2}}$$

$$\rho_{pv} = -\nabla \bullet P = \underline{\underline{-7.427 \text{ nC/m}^3}}$$

Prob. 5.14

$$\rho_{pv} = -\nabla \bullet P = 0, \quad \rho_{ps} = P \bullet a_n = \underline{\underline{5 \sin \alpha y}}$$

Prob. 5.15 (a) Applying Coulomb's law.


$$E_r = \begin{cases} \frac{D_r}{\epsilon_0} = \frac{Q}{4\pi \epsilon_0 r^2}, & b < r < a \\ \frac{D_r}{\epsilon} = \frac{Q}{4\pi \epsilon r^2}, & a < r < b \end{cases}$$

$$E = \frac{4\pi r_o^2 \rho_s}{4\pi \epsilon r^2} a_r = \frac{(0.1)^2 \times 4 \times 10^{-9}}{10^{-9} \times 2.5 \times (0.13)^2} a_r = \underline{\underline{107.1 a_r \text{ V/m}}}$$

Since $a_r = \frac{I}{L}(-3a_x + 4a_y + 12a_z)$,

$$E = \underline{\underline{-24.72 a_x + 32.95 a_y + 98.86 a_z \text{ V/m}}}$$

Prob. 5.18



For $0 < r < a$,

$$D = \frac{Q}{4\pi r^2} a_r \quad \longrightarrow \quad E = \frac{Q}{4\pi \epsilon_0 r^2} a_r, \quad P = 0$$

For $a < r < b$,

$$D = \frac{Q}{4\pi r^2} a_r \quad \longrightarrow \quad E = \frac{Q}{4\pi \epsilon \epsilon_r r^2} a_r, \quad P = \chi_e \epsilon_0 E = \frac{\epsilon_r - 1}{\epsilon_r} \frac{Q}{4\pi r^2} a_r$$

For $r > b$,

$$D = \frac{Q}{4\pi r^2} a_r \quad \longrightarrow \quad E = \frac{Q}{4\pi \epsilon_0 r^2} a_r, \quad P = 0$$

Thus,

$$D = \frac{Q}{4\pi \epsilon r^2} a_r, \quad r > 0$$

$$E = \begin{cases} \frac{Q}{4\pi \epsilon \epsilon_r r^2} a_r, & a < r < b \\ \frac{Q}{4\pi \epsilon_0 r^2} a_r, & \text{otherwise} \end{cases}$$

$$P = \begin{cases} \frac{\epsilon_r - 1}{\epsilon_r} \frac{Q}{4\pi r^2} a_r, & a < r < b \\ 0, & \text{otherwise} \end{cases}$$

Prob. 5.19 (a)

$$\rho_v = \begin{cases} \rho_o, & 0 < r < a \\ 0, & r > a \end{cases}$$

$$\text{For } r < a, \quad \epsilon E_r (4\pi r^2) = \rho_o \frac{4\pi r^3}{3} \quad \longrightarrow \quad E_r = \frac{\rho_o r}{3\epsilon}$$

$$V = - \int E \bullet dl = - \frac{\rho_o r^2}{6\epsilon} + c_1$$

$$\text{For } r > a, \quad \epsilon_o E_r (4\pi r^2) = \rho_o \frac{4\pi a^3}{3} \quad \longrightarrow \quad E_r = \frac{\rho_o a^3}{3\epsilon_o r^2}$$

$$V = - \int E \bullet dl = \frac{\rho_o a^3}{3\epsilon_o r} + c_2$$

As $r \rightarrow \infty$, $V = 0$ and $c_2 = 0$

At $r = a$, $V(a^+) = V(a^-)$

$$-\frac{\rho_o a^2}{6\epsilon_o \epsilon_r} + c_1 = \frac{\rho_o a^2}{3\epsilon_o} \quad \longrightarrow \quad c_1 = \frac{\rho_o a}{6\epsilon_o \epsilon_r} (2\epsilon_r + 1)$$

$$V(r=0) = c_1 = \underline{\underline{\frac{\rho_o (2\epsilon_r + 1)}{6\epsilon_o a}}}$$

$$(b) \quad V(r=a) = \underline{\underline{\frac{\rho_o a^2}{3\epsilon_o}}}$$

Prob. 5.20 Since $\frac{\partial \rho_v}{\partial t} = 0$, $\nabla \bullet J = 0$ must hold.

(a) $\nabla \bullet J = 6x^2y + 0 - 6x^2y = 0 \quad \longrightarrow \quad \text{This is possible.}$

(b) $\nabla \bullet J = y + (z + 1) \neq 0 \quad \longrightarrow \quad \text{This is not possible.}$

(c) $\nabla \bullet J = \frac{l}{\rho} \frac{\partial}{\partial \rho} (z^2) + \cos \phi \neq 0 \quad \longrightarrow \quad \text{This is not possible.}$

(d) $\nabla \bullet J = \frac{l}{r^2} \frac{\partial}{\partial r} (\sin \theta) = 0 \quad \longrightarrow \quad \text{This is possible.}$

Prob. 5.21 (a)

$$\begin{bmatrix} D_x \\ D_y \\ D_z \end{bmatrix} = \epsilon_0 \begin{bmatrix} 4 & 1 & 1 \\ 1 & 4 & 1 \\ 1 & 1 & 4 \end{bmatrix} \begin{bmatrix} 10 \\ 10 \\ 0 \end{bmatrix}$$

$$D_x = 50\epsilon_0, \quad D_y = 50\epsilon_0, \quad D_z = 20\epsilon_0$$

$$D = \underline{\underline{0.442a_x + 0.442a_y + 0.1768a_z}} \text{ nC/m}^2$$

(b)

$$\begin{bmatrix} D_x \\ D_y \\ D_z \end{bmatrix} = \epsilon_0 \begin{bmatrix} 4 & 1 & 1 \\ 1 & 4 & 1 \\ 1 & 1 & 4 \end{bmatrix} \begin{bmatrix} 10 \\ 20 \\ -30 \end{bmatrix}$$

$$D_x = 30\epsilon_0, \quad D_y = 60\epsilon_0, \quad D_z = 90\epsilon_0$$

$$D = \underline{\underline{0.2653a_x + 0.5305a_y + 0.7958a_z}} \text{ nC/m}^2$$

Prob. 5.22 (a) $\nabla \bullet J = \frac{1}{\rho} \frac{\partial}{\partial \rho} \left(\frac{100}{\rho} \right) = -\frac{100}{\rho^3}$

$$-\frac{\partial \rho_v}{\partial t} = \nabla \bullet J = -\frac{100}{\rho^3} \quad \longrightarrow \quad \underline{\underline{\frac{\partial \rho_v}{\partial t} = \frac{100}{\rho^3} \text{ C/m}^3.s}}$$

(b) $I = \int J \bullet dS = \iint \frac{100}{\rho^3} \rho d\phi dz \Big|_{\rho=2} = \frac{100}{2^2} \int_0^{2\pi} d\phi \int_0^l dz = 50\pi = \underline{\underline{157.1}} \text{ A}$

Prob. 5.23 (a)

$$I = \int J \bullet dS = \iint \frac{5e^{-10^4 t}}{r} r^2 \sin\theta d\theta d\phi \Big|_{r=2} = (2)(5)e^{-10^4 t} \int_0^\pi \sin\theta d\theta \int_0^{2\pi} d\phi = 40\pi e^{-10^4 t}$$

At $t=0.1 \text{ ms}$, $I = 40\pi e^{-t} = \underline{\underline{46.23}} \text{ A}$

$$-\frac{\hat{c}\rho_v}{\hat{c}t} = \nabla \bullet J \quad \longrightarrow \quad \rho_v = - \int \nabla \bullet J dt$$

$$\nabla \bullet J = \frac{1}{r^2} \frac{\hat{c}}{\hat{c}r} (r^2 J_r) = \frac{5}{r^2} e^{-10^4 t}$$

$$\rho_v = - \int \frac{5}{r^2} e^{-10^4 t} dt = \frac{5}{10^4 r^2} e^{-10^4 t}$$

At $t=0.1$ ms and $r = 2$ m,

$$\rho_v = \frac{5}{10^4 (2)^2} e^{-1} = \underline{\underline{45.98 \mu C / m^3}}$$

$$\text{Prob. 5.24 (a)} \quad \frac{\epsilon}{\sigma} = \frac{3.1x \frac{10^{-9}}{36\pi}}{10^{-15}} = \underline{\underline{2.741 \times 10^4 \text{ s}}}$$

$$(b) \quad \frac{\epsilon}{\sigma} = \frac{6x \frac{10^{-9}}{36\pi}}{10^{-15}} = \underline{\underline{5.305 \times 10^4 \text{ s}}}$$

$$(c) \quad \frac{\epsilon}{\sigma} = \frac{80x \frac{10^{-9}}{36\pi}}{10^{-4}} = \underline{\underline{7.07 \mu s}}$$

$$\text{Prob. 5.25 (a)} \quad Q = Q_o e^{-t/T_r} \longrightarrow \frac{1}{3} Q_o = Q_o e^{-t_1/T_r} \longrightarrow e^{t_1/T_r} = 3$$

$$T_r = \frac{t_1}{\ln 3} = \frac{20 \mu s}{\ln 3} = \underline{\underline{18.2 \mu s}}$$

$$(b) \text{ But } T_r = \frac{\epsilon_r \epsilon_o}{\sigma}, \quad \epsilon_r = \frac{\sigma T_r}{\epsilon_o} = \frac{10^{-5} \times 18.2 \times 10^{-6}}{\frac{10^{-9}}{36\pi}} = \underline{\underline{20.58}}$$

$$(c) \quad \frac{Q}{Q_o} = e^{-t_o/T_r} = e^{-30/18.2} = 0.1923 \quad \text{i.e. } \underline{\underline{19.23\%}}$$

Prob. 5.26

$$T_r = \frac{\epsilon}{\sigma} = \frac{2.5 \times 10^{-9}}{5 \times 10^{-6} \times 36\pi} = 4.42 \mu s$$

$$\rho_{vo} = \frac{Q}{V} = \frac{10 \times 10^{-6}}{\frac{4\pi}{3} \times 10^{-6} \times 8} = \underline{\underline{0.2984 C / m^3}}$$

$$\rho_v = \rho_{vo} e^{-t/T_r} = 0.2984 e^{-2.442} = \underline{\underline{0.1898 C / m^3}}$$

Prob. 5.27 (a) $E_{2t} = E_{lt} = -300a_x + 50a_y, \quad E_{ln} = 70a_z$

$$D_{2n} = D_{ln} \quad \longrightarrow \quad \epsilon_2 E_{2n} = \epsilon_l E_{ln}$$

$$E_{2n} = \frac{\epsilon_l}{\epsilon_2} E_{ln} = \frac{2.5}{4} (70a_z) = 43.75a_z$$

$$E_2 = -30a_x + 50a_y + 43.75a_z$$

$$D_2 = \epsilon_0 \epsilon_r E_2 = 4x \frac{10^{-9}}{36\pi} (-30, 50, 43.75) = \underline{-1.061a_x + 1.768a_y + 1.547a_z \text{ nC/m}^2}$$

$$(b) \quad P_2 = \epsilon_0 \chi_{el} E_2 = 3x \frac{10^{-9}}{36\pi} (-30, 50, 43.75) = \underline{0.7958a_x + 1.326a_y + 1.161a_z \text{ nC/m}^2}$$

$$(c) \quad E_l \bullet a_z = E_l \cos \theta_n$$

$$\cos \theta_n = \frac{70}{\sqrt{30^2 + 50^2 + 70^2}} = 0.7683 \quad \longrightarrow \quad \underline{\theta_n = 39.79^\circ}$$

Prob. 5.28

$$(a) \quad P_l = \epsilon_0 \chi_{el} E_l = 2x \frac{10^{-9}}{36\pi} (10, -6, 12) = \underline{0.1768a_x - 0.1061a_y + 0.2122a_z \text{ nC/m}^2}$$

$$(b) \quad E_{ln} = -6a_x, \quad E_{2t} = E_{lt} = 10a_x + 12a_z$$

$$D_{2n} = D_{ln} \quad \longrightarrow \quad \epsilon_2 E_{2n} = \epsilon_l E_{ln}$$

$$\text{or} \quad E_{2n} = \frac{\epsilon_l}{\epsilon_2} E_{ln} = \frac{3\epsilon_0}{4.5\epsilon_0} (-6a_z) = -4a_y$$

$$E_2 = \underline{10a_x - 4a_y + 12a_z \text{ V/m}}$$


$$\tan \theta_2 = \frac{E_{2t}}{E_{2n}} = \frac{\sqrt{10^2 + 12^2}}{4} = 3.905 \quad \longrightarrow \quad \underline{\theta_2 = 75.64^\circ}$$

$$(c) \quad w_E = \frac{1}{2} D \bullet E = \frac{1}{2} \epsilon |E|^2$$

$$w_{E1} = \frac{1}{2} \epsilon_1 |E_1|^2 = \frac{1}{2} x 3x \frac{10^{-9}}{36\pi} (10^2 + 6^2 + 12^2) = \underline{0.2219 \text{ nJ/m}^3}$$

$$w_{E2} = \frac{1}{2} \epsilon_2 |E_2|^2 = \frac{1}{2} x 4.5x \frac{10^{-9}}{36\pi} (10^2 + 4^2 + 12^2) = \underline{0.3208 \text{ nJ/m}^3}$$

Prob. 5.31 (a)

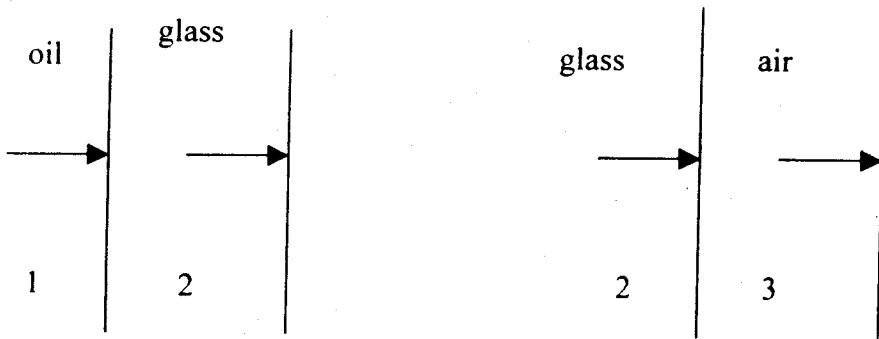


$$E_{In} = 2000, \quad E_{It} = 0 = E_{2t} = E_{3t}$$

$$D_{In} = D_{2n} = D_{3n} \longrightarrow \epsilon_1 E_{In} = \epsilon_2 E_{2n} = \epsilon_3 E_{3n}$$

$$E_{2n} = \frac{\epsilon_1}{\epsilon_2} E_{In} = \frac{3.0}{8.5} (2000) = \underline{705.9 \text{ V/m}}, \quad \theta_2 = 0^\circ$$

$$E_{3n} = \frac{\epsilon_1}{\epsilon_3} E_{In} = \frac{3.0}{1.0} (2000) = \underline{6000 \text{ V/m}}, \quad \theta_3 = 0^\circ$$

(b)

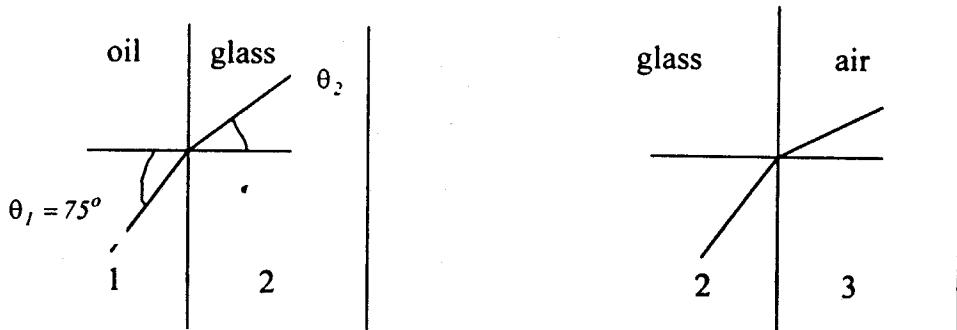

$$E_{In} = 2000 \cos 75^\circ = 517.63, \quad E_{It} = 2000 \sin 75^\circ = E_{2t} = E_{3t} = 1931.85$$

$$E_{2n} = \frac{\epsilon_1}{\epsilon_2} E_{In} = \frac{3}{8.5} (517.63) = 182.7, \quad E_{3n} = \frac{\epsilon_1}{\epsilon_3} E_{In} = \frac{3}{1} (517.63) = 1552.89$$

$$E_2 = \sqrt{E_{2n}^2 + E_{2t}^2} = 1940.5, \quad \theta_2 = \tan^{-1} \frac{E_{2t}}{E_{2n}} = \underline{84.6^\circ},$$

$$E_3 = \sqrt{E_{3n}^2 + E_{3t}^2} = 2478.6, \quad \theta_3 = \tan^{-1} \frac{E_{3t}}{E_{3n}} = \underline{51.2^\circ}$$

Prob. 5.32 (a) $\rho_s = D_n = \epsilon_0 E_n = \frac{10^{-9}}{36\pi} \sqrt{15^2 + 8^2} = \underline{\underline{0.1503 \text{ nC/m}^2}}$

(b) $D_n = \rho_s = -20 \text{ nC}$


$$D = D_n a_n = (-20 \text{ nC})(-a_y) = \underline{\underline{20a_y \text{ nC/m}^2}}$$

Prob. 5.33 (a)

$$D_n = \rho_s = \frac{Q}{4\pi a^2} = \frac{12 \times 10^{-9}}{4\pi \times 25 \times 10^{-4}} = \frac{1200}{\pi} \text{ nC/m}^2$$

$$|D| = \underline{\underline{381.97 \text{ nC/m}^2}}$$

(b) Using Gauss' law,



$$D_r 4\pi r^2 = Q \longrightarrow D_r = \frac{Q}{4\pi r^2}$$

$$D = \frac{Q}{4\pi r^2} a_r = \frac{12}{4\pi r^2} a_r \text{ nC/m}^2 = \underline{\underline{\frac{0.955}{r^2} a_r \text{ nC/m}^2}}$$

$$(c) W = \frac{1}{2\epsilon_0} \int |D|^2 dv = \frac{Q^2}{2\epsilon_0 16\pi^2} \iiint \frac{1}{r^4} r^2 \sin\theta d\theta d\phi dr = \frac{Q^2}{32\pi^2 \epsilon_0} 4\pi \int_a^\infty \frac{dr}{r^2}$$

$$= \frac{Q^2}{8\pi \epsilon_0 a} = \frac{144 \times 10^{-18}}{8\pi \times \frac{10^{-9}}{36\pi} \times 5 \times 10^{-2}} = \underline{\underline{12.96 \mu J}}$$

CHAPTER 6

P. E. 6.1

$$\nabla^2 V = -\frac{\rho}{\epsilon} \longrightarrow \frac{d^2 V}{dx^2} = -\frac{\rho_o x}{\epsilon_o}$$

$$V = -\frac{\rho_o x^3}{6\epsilon a} + Ax + B$$

$$E = -\frac{dV}{dx} a_x = \left(\frac{\rho_o x^2}{2\epsilon a} - A \right) a_x$$

If $E = 0$ at $x = 0$, then

$$0 = 0 - A \longrightarrow A = 0$$

If $V = 0$ at $x = a$, then

$$0 = -\frac{\rho_o a^3}{6\epsilon a} + B \longrightarrow B = \frac{\rho_o a^2}{6\epsilon}$$

Thus

$$\underline{V = \frac{\rho_o}{6\epsilon a} (a^3 - x^3)}, \quad \underline{E = \frac{\rho_o x^2}{2\epsilon a} a_x}$$

P. E. 6.2 $V_1 = A_1 x + B_1, \quad V_2 = A_2 x + B_2$

$$V_1(x = d) = V_o = A_1 d + B_1 \longrightarrow B_1 = V_o - A_1 d$$

$$V_1(x = 0) = 0 = 0 + B_2 \longrightarrow B_2 = 0$$

$$V_1(x = a) = V_2(x = a) \longrightarrow A_1 + B_1 = A_2 a$$

$$D_{ln} = D_{2n} \longrightarrow \epsilon_1 A_1 = \epsilon_2 A_2 \longrightarrow A_2 = \frac{\epsilon_1}{\epsilon_2} A_1$$

$$A_1 a + V_o - A_1 d = \frac{\epsilon_1}{\epsilon_2} a A_1 \longrightarrow V_o = A_1 \left(-a + d + \frac{\epsilon_1}{\epsilon_2} a \right)$$

or

$$A_1 = \frac{V_o}{d - a + \epsilon_1 a / \epsilon_2}, \quad A_2 = \frac{\epsilon_1}{\epsilon_2} A_1 \frac{\epsilon_1 V_o}{\epsilon_2 d - \epsilon_2 a + \epsilon_1 a}$$

Hence

$$E_1 = -A_1 a_x = \frac{-V_o a_x}{d - a + \epsilon_1 a / \epsilon_2}, \quad E_2 = -A_2 a_x = \frac{-V_o a_x}{a + \epsilon_2 d / \epsilon_1 - \epsilon_2 a / \epsilon_1}$$

P. E. 6.3 From Example 6.3,


$$E = -\frac{V_o}{\rho \phi_o} a_\phi, \quad D = \epsilon_o E$$

$$\rho_v = D_n(\phi = 0) = -\frac{V_o \epsilon}{\rho \phi_o}$$

The charge on the plate $\phi = 0$ is

$$Q = \int \rho_s dS = -\frac{V_o \epsilon}{\phi_o} \int_{z=0}^L \int_{\rho=a}^b \frac{1}{\rho} dz d\rho = -\frac{V_o \epsilon}{\phi_o} L \ln(b/a)$$

$$C = \frac{|Q|}{V_o} = \frac{\epsilon L}{\phi_o} \ln \frac{b}{a}$$



$$a \sin \frac{45^\circ}{2} = 2 \quad \longrightarrow \quad a = \frac{2}{\sin 22.5^\circ} = 5.226 \text{ mm}$$

$$C = \frac{1.5 \times 10^{-9}}{36\pi \times \frac{\pi}{4}} 5 \ln \frac{1000}{5.226} = 444 \text{ pF}$$

$$Q = CV_o = 444 \times 10^{-12} \times 50 = \underline{\underline{22.2 \text{ nC}}}$$

P. E. 6.4 From Example 6.4,

$$V_o = 50, \quad \theta_1 = \pi/2, \quad \theta_2 = 45^\circ, \quad r = \sqrt{3^2 + 4^2 + 2^2} = \sqrt{29}, \quad \theta = \tan^{-1} \frac{\rho}{z} = \frac{5}{2} \quad \longrightarrow \quad \theta = 68.2^\circ$$

$$V = \frac{50 \ln(\tan 34.1^\circ)}{\tan(22.5^\circ)} = \underline{\underline{22.13 \text{ V}}}, \quad E = \frac{-50 a_\theta}{\sqrt{29} \sin 68.2^\circ \ln \tan(22.5^\circ)} = \underline{\underline{11.36 a_\theta \text{ V/m}}}$$

P. E. 6.5

$$E = -\nabla V = -\frac{\partial V}{\partial x} a_x - \frac{\partial V}{\partial y} a_y$$

$$= -\frac{4V_o}{b} \sum_{n=\text{odd}}^x \frac{1}{\sinh n\pi a/b} [\cos(n\pi x/b) \sinh(n\pi y/b) a_x + \sin(n\pi x/b) \cosh(n\pi y/b) a_y]$$

(a) At $(x,y) = (a, a/2)$,

$$V = \frac{400}{\pi} (0.3775 - 0.0313 + 0.00394 - 0.000584 + \dots) = \underline{\underline{44.51 \text{ V}}}$$

$$E = 0a_x + (-115.12 + 19.127 - 3.9431 + 0.8192 - 0.1703 + 0.035 - 0.0094 + \dots)a_y \\ = \underline{\underline{-99.25a_y \text{ V/m}}}$$

(b) At $(x,y) = (3a/2, a/4)$,

$$V = \frac{400}{\pi} (0.1238 + 0.00626 - 0.00383 + 0.000264 + \dots) = \underline{\underline{16.50 \text{ V}}}$$

$$E = (24.757 - 3.7358 - 0.3834 - 0.0369 + 0.00351 - 0.00033 + \dots)a_x \\ + (-66.25 - 4.518 + 0.3988 + 0.03722 - 0.00352 - 0.000333 + \dots)a_y \\ = \underline{\underline{20.68a_x - 70.34a_y \text{ V/m}}}$$

P. E. 6.6

$$V(y=a) = V_o \sin(7\pi x/b) = \sum_{n=1}^{\infty} c_n \sin(n\pi x/b) \sinh(n\pi a/b)$$

By equating coefficients, we notice that $c_n = 0$ for $n \neq 7$. For $n=7$,

$$V_o \sin(7\pi x/b) = c_7 \sin(7\pi x/b) \sinh(7\pi a/b) \longrightarrow c_7 = \frac{V_o}{\sinh(7\pi a/b)}$$

Hence

$$V(x,y) = \frac{V_o}{\sinh(7\pi a/b)} \sin(7\pi x/b) \sinh(7\pi y/b)$$

P. E. 6.7 Let $V(r,\theta,\phi) = R(r)F(\theta)\Phi(\phi)$.

Substituting this in Laplace's equation gives

$$\frac{\Phi F}{r^2} \frac{d}{dr} \left(r^2 \frac{dR}{dr} \right) + \frac{R\Phi}{r^2 \sin\theta} \frac{d}{d\theta} \left(\sin\theta \frac{dF}{d\theta} \right) + \frac{RF}{r^2 \sin^2\theta} \frac{d^2\Phi}{d\phi^2} = 0$$

Dividing by $RF\phi / r^2 \sin^2\theta$ gives

$$\frac{\sin^2\theta}{R} \frac{d}{dr} \left(r^2 R' \right) + \frac{\sin\theta}{F} \frac{d}{d\theta} \left(\sin\theta F' \right) = - \frac{1}{\phi} \frac{d^2\Phi}{d\phi^2} = \lambda^2$$

$$\Phi'' + \lambda^2 \Phi = 0$$

$$\frac{I}{R} \frac{d}{dr} (r^2 R') = \frac{\lambda^2}{\sin^2 \theta} - \frac{I}{F \sin \theta} \frac{d}{d\theta} (\sin \theta F') = \mu^2$$

$$2R' + r^2 R'' = \mu^2 R$$

or

$$R'' + \frac{2}{r} R' - \frac{\mu^2}{r^2} R = 0$$

$$\frac{\sin \theta}{F} \frac{d}{d\theta} (\sin \theta F') - \lambda^2 + \mu^2 \sin^2 \theta = 0$$

or

$$F'' + \cot \theta F' + (\mu^2 - \lambda^2 \cosec^2 \theta) F = 0$$

P. E. 6.8 (a) This is similar to Example 6.8(a) except that here $0 < \phi < 2\pi$ instead of $0 < \phi < \pi/2$. Hence

$$I = \frac{2\pi t V_o \sigma}{\ln(b/a)} \quad \text{and} \quad R = \frac{V_o}{I} = \frac{\ln \frac{b}{a}}{2\pi t \sigma}$$

(b) This is similar to Example 6.8(b) except that here $0 < \phi < 2\pi$. Hence

$$I = \frac{V_o \sigma}{t} \int_a^b \int_0^{2\pi} \rho d\rho d\phi = \frac{V_o \sigma \pi (b^2 - a^2)}{t}$$

$$\text{and } R = \frac{V_o}{I} = \frac{t}{\sigma \pi (b^2 - a^2)}$$

P. E. 6.9 From Example 6.9,

$$J_1 = \frac{\sigma_1 V_o}{\rho \ln \frac{b}{a}}, \quad J_2 = \frac{\sigma_2 V_o}{\rho \ln \frac{b}{a}}$$

$$I = \int J \bullet dS = \int_{z=0}^l \left[\int_{\phi=0}^{\pi} J_1 \rho d\phi + \int_{\phi=\pi}^{2\pi} J_2 \rho d\phi \right] dz = \frac{V_o l}{\ln \frac{b}{a}} [\pi \sigma_1 + \pi \sigma_2]$$

$$R = \frac{V_o}{I} = \frac{\ln \frac{b}{a}}{\pi l [\sigma_1 + \sigma_2]}$$

P. E. 6.10 (a) $C = \frac{2\pi\epsilon}{l - \frac{a}{b}}$, C_1 and C_2 are in series.

$$C_1 = 4\pi x \frac{10^{-9}}{36\pi} \left(\frac{2.5}{\frac{10^3}{2} - \frac{10^3}{3}} \right) = 5/3 \text{ pF}, \quad C_2 = 4\pi x \frac{10^{-9}}{36\pi} \left(\frac{3.5}{\frac{10^3}{1} - \frac{10^3}{2}} \right) = 7/9 \text{ pF}$$

$$C = \frac{C_1 C_2}{C_1 + C_2} = \frac{(5/3)(7/9)}{(5/3) + (7/9)} = \underline{\underline{0.53 \text{ pF}}}$$

(b) $C = \frac{2\pi\epsilon}{l - \frac{a}{b}}$, C_1 and C_2 are in parallel.

$$C_1 = 2\pi x \frac{10^{-9}}{36\pi} \left(\frac{2.5}{\frac{10^3}{1} - \frac{10^3}{3}} \right) = 5/24 \text{ pF}, \quad C_2 = 2\pi x \frac{10^{-9}}{36\pi} \left(\frac{3.5}{\frac{10^3}{1} - \frac{10^3}{3}} \right) = 7/24 \text{ pF}$$

$$C = C_1 + C_2 = \underline{\underline{0.5 \text{ pF}}}$$

P. E. 6.11 As in Example 6.8, assuming $V(\rho = a) = 0$, $V(\rho = b) = V_o$,

$$V = V_o \frac{\ln \rho/a}{\ln b/a}, \quad E = -\nabla V = -\frac{V_o}{\rho \ln b/a} a_\rho$$

$$Q = \int \epsilon E \bullet dS = \frac{V_o \epsilon}{\ln b/a} \int_{z=0}^L \int_{\phi=0}^{2\pi} \frac{l}{\rho} dz \rho d\phi = \frac{V_o 2\pi \epsilon L}{\ln b/a}$$

$$C = \frac{Q}{V_o} = \frac{2\pi \epsilon L}{\ln b/a}$$

P. E. 6.12 (a) C_1 and C_2 are in series.

$$C_1 = \frac{2\pi\epsilon_r \epsilon_o}{\ln c/a} = \frac{2\pi x 2.5}{\ln 2/1} \frac{10^{-9}}{36\pi} = 200 \text{ pF/m}, \quad C_2 = \frac{2\pi\epsilon_r \epsilon_o}{\ln h/c} = \frac{2\pi x 3.5}{\ln 3/2} \frac{10^{-9}}{36\pi} = 480 \text{ pF/m}$$

$$C = \frac{C_1 C_2}{C_1 + C_2} = \frac{200 \times 480}{200 + 480} = 141.12 \text{ pF}$$

$$C_T = Cl = \underline{\underline{1.41}} \text{ nF}$$

(b) C_1 and C_2 are in parallel.

$$C = C_1 + C_2 = \frac{\pi \epsilon_{r1} \epsilon_o}{\ln b/a} + \frac{\pi \epsilon_{r2} \epsilon_o}{\ln b/a} = \frac{\pi (\epsilon_{r1} + \epsilon_{r2}) \epsilon_o}{\ln b/a} = \frac{6\pi}{\ln 3/7} \frac{10^{-9}}{36\pi} = 151.7 \text{ pF/m}$$

$$C_T = Cl = \underline{\underline{1.52}} \text{ nF}$$

P. E. 6.13 Instead of Eq. (6.31), we now have


$$V = - \int_b^a \frac{Q dr}{4\pi\epsilon_0 r^2} = - \int_b^a \frac{Q dr}{4\pi \frac{10\epsilon_o}{r^2}} = - \frac{Q}{40\pi\epsilon_o} \ln b/a$$

$$C = \frac{Q}{|V|} = \frac{40\pi}{\ln 4/1.5} \frac{10^{-9}}{36\pi} = \underline{\underline{1.13}} \text{ nF}$$

P. E. 6.14 Let

$$F = F_1 + F_2 + F_3 + F_4 + F_5$$

where $F_i, i = 1, 2, \dots, 5$ are shown on in the figure below.

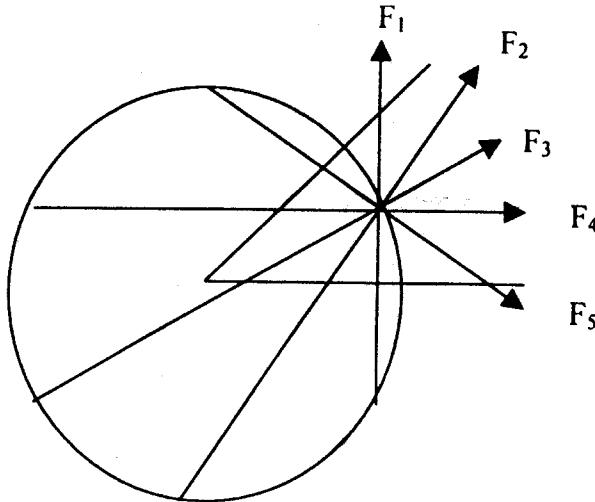

$$F = - \frac{Q^2}{4\pi\epsilon_0 r^2} + \frac{Q^2(a_x \sin 30^\circ + a_y \cos 30^\circ)}{4\pi\epsilon_0 (r \cos 30^\circ)^2} - \frac{Q^2(a_x \cos 30^\circ + a_y \sin 30^\circ)}{4\pi\epsilon_0 (2r)^2} + \frac{Q^2 a_x}{4\pi\epsilon_0 (r \cos 30^\circ)^2} \\ - \frac{Q^2(a_x \cos 30^\circ - a_y \sin 30^\circ)}{4\pi\epsilon_0 r^2}$$

$$= -\frac{Q^2}{4\pi\epsilon_0 r^2} \left[-a_x + \frac{4}{3} \left(\frac{a_x}{2} + \frac{\sqrt{3}a_y}{2} \right) - \frac{1}{4} \left(\frac{\sqrt{3}a_x}{2} + \frac{a_y}{2} \right) + \frac{4}{3}a_x - \frac{\sqrt{3}a_x}{2} + \frac{a_y}{2} \right]$$

$$= 9x10^{-5} \left[a_x \left(2 - \frac{5\sqrt{3}}{8} \right) + a_y \left(\frac{4\sqrt{3}-5}{8} \right) \right] = 82.57a_x + 21.69a_y \text{ } \mu\text{N}$$

$|F| = 85.37 \text{ } \mu\text{N}$

Prob. 6.1

$$E = -\nabla V = -\frac{\partial V}{\partial x}a_x - \frac{\partial V}{\partial y}a_y - \frac{\partial V}{\partial z}a_z = -6y^2za_x - 12xyz a_y - 6xy^2a_z$$

At P(1,2,-5),

$$\underline{E = 120a_x + 120a_y - 12a_z \text{ V/m}}$$

$$\nabla^2 V = \frac{\partial^2 V}{\partial x^2} + \frac{\partial^2 V}{\partial y^2} + \frac{\partial^2 V}{\partial z^2} = 0 + 12xz + 0$$

$$\rho_v = -\epsilon_0 \nabla^2 V = -12xz\epsilon_0$$

At P,

$$\rho_v = 60\epsilon_0 = 60x \frac{10^{-9}}{36\pi} = 530.5 \text{ pC/m}^3$$

Prob. 6.2

$$\frac{d^2V}{dx^2} = -\frac{\rho_v}{\epsilon_0} = -\frac{\frac{x}{6\pi}10^{-9}}{10^{-9}/36\pi} = -6x$$

$$\frac{dV}{dx} = -3x^2 + A \quad \longrightarrow \quad V = -x^3 + Ax + B$$

$$-50 = -1 + A + B \quad \longrightarrow \quad A + B = -49$$

$$50 = -64 + 4A + B \quad \longrightarrow \quad 4A + B = 114$$

Thus, A = 54.33 and B = -103.33

$$V = -x^3 + 54.33x - 103.3$$

$$V(2) = -8 + 108.66 - 103.3 = \underline{-2.667}$$

Prob. 6.3 (a)

$$\nabla^2 V = -\frac{\rho_o}{\epsilon_o} \longrightarrow \frac{d^2 V}{dx^2} = -\frac{\rho_o(x-d)}{d\epsilon_o} = -kx + kd, \quad k = \frac{\rho_o}{d\epsilon_o}$$

$$\frac{dV}{dx} = -kx^2/2 + kdx + A \longrightarrow V = -kx^3/6 + kdx^2/2 + Ax + B$$

$$\text{When } x=0, V=0 \longrightarrow 0=B$$

$$\text{When } x=d, V=V_o, \longrightarrow V_o = -kd^3/6 + kd^3/2 + Ad$$

$$\text{i.e. } A = V_o/d - kd^2/3$$

$$V = -\frac{\rho_o x^3}{6d\epsilon_o} + \frac{\rho_o x^2}{2\epsilon_o} + \left(\frac{V_o}{d} - \frac{\rho_o d}{3\epsilon_o}\right)x$$

$$E = -\nabla V = -\frac{dV}{dx} a_x = \left(\frac{\rho_o x^2}{2d\epsilon_o} - \frac{\rho_o x}{\epsilon_o} - \frac{V_o}{d} + \frac{\rho_o d}{3\epsilon_o}\right) a_x$$

$$(b) \rho_s = D_n = \epsilon_o E_n = \epsilon_o E \bullet a_n$$

$$\text{At } x=0, a_n = a_x, \quad \rho_s = \frac{\rho_o d}{3} - \frac{\epsilon_o V_o}{d}$$

$$\text{At } x=d, a_n = -a_x, \quad \rho_s = -\rho_o d/2 + \rho_o d + \epsilon_o V_o/d - \rho_o d/3$$

$$\rho_s = \frac{\epsilon_o V_o}{d} + \frac{\rho_o d}{6}$$

Prob. 6.4 If $V'' = f$,

$$V' = \int_0^x f(x) dx + c_1$$

$$V = \int_0^x \int_0^\lambda f(\mu) d\mu d\lambda + c_1 x + c_2$$

$$V(x=0) = V_I = c_2 \longrightarrow c_2 = V_I$$

$$(b) \quad V_2 = \frac{I}{(x^2 + y^2 + z^2)^{1/2}} = I/r = r^{-1}$$

$$\nabla^2 V_2 = \frac{I}{r^2} \frac{\partial}{\partial r} \left(r^2 \frac{\partial V_2}{\partial r} \right) + 0 = \frac{I}{r^2} \frac{\partial}{\partial r} \left(r^2 \frac{-I}{r^2} \right) = 0$$

i.e. Yes.

$$(c) \quad \nabla^2 V_3 = \frac{I}{\rho} \frac{\partial}{\partial \rho} \left(\rho \frac{\partial^2 V_3}{\partial \phi^2} \right) + \frac{I}{\rho^2} \frac{\partial^2 V_3}{\partial \phi^2} + \frac{\partial^2 V_3}{\partial z^2}$$

$$= \frac{I}{\rho} \frac{\partial}{\partial \rho} (\rho z \sin \phi) - \frac{z}{\rho} \sin \phi + 0 = \frac{z}{\rho} \sin \phi + 4 - \frac{z}{\rho} \sin \phi = 4$$

i.e. No.

$$(d) \quad \nabla^2 V_4 = 0 + \frac{10 \sin \phi}{r^4 \sin \theta} \frac{\partial}{\partial \theta} (\sin \theta \cos \theta) - \frac{10 \sin \theta \sin \phi}{r^4}$$

$$= \frac{10 \sin \phi (\cos^2 \theta - \sin^2 \theta)}{r^4 \sin \theta} - \frac{10 \sin \theta \sin \phi}{r^4} = \frac{10 \sin \phi}{r^4 \sin \theta} - \frac{30 \sin \theta \sin \phi}{r^4} \neq 0$$

i.e. No.

Prob. 6.7 (a)

$$\nabla^2 V = \frac{\partial^2 V}{\partial x^2} + \frac{\partial^2 V}{\partial y^2} + \frac{\partial^2 V}{\partial z^2} = \frac{\partial}{\partial x} (-5e^{-5x} \cos 13y \sinh 12z) + \dots = 25V - 169V + 144V = 0$$

$$(b) \quad \nabla^2 V = \frac{I}{\rho} \frac{\partial}{\partial \rho} \left(-\frac{z \cos \phi}{\rho} \right) - \frac{z \cos \phi}{\rho} + 0 = \frac{z \cos \phi}{\rho^3} - \frac{z \cos \phi}{\rho^3} = 0$$

$$(c) \quad V = 30r^{-2} \cos \theta,$$

$$\nabla^2 V = \frac{I}{r^2} \frac{\partial}{\partial r} (-60r^{-1} \cos \theta) + \frac{I}{r^2 \sin \theta} \frac{\partial}{\partial \theta} (-\sin \theta 30r^{-2} \sin \theta) = \frac{60}{r^2} \cos \theta - \frac{30}{r^4 \sin \theta} (2 \sin \theta \cos \theta) = 0$$

Prob. 6.8 If

$$\nabla^2 V = \frac{\partial^2 V}{\partial x^2} + \frac{\partial^2 V}{\partial y^2} + \frac{\partial^2 V}{\partial z^2} = 0$$

then

$$0 = -\frac{\partial}{\partial x} \left(\frac{\partial^2 V}{\partial x^2} + \frac{\partial^2 V}{\partial y^2} + \frac{\partial^2 V}{\partial z^2} \right) = \frac{\partial^2}{\partial x^2} \left(-\frac{\partial V}{\partial x} \right) + \frac{\partial^2}{\partial y^2} \left(-\frac{\partial V}{\partial x} \right) + \frac{\partial^2}{\partial z^2} \left(-\frac{\partial V}{\partial x} \right)$$

or

$$0 = \frac{\partial^2}{\partial x^2} E_x + \frac{\partial^2}{\partial y^2} E_x + \frac{\partial^2}{\partial z^2} E_x = \nabla^2 E_x$$

i.e. $\nabla^2 E_x = 0$.

The same holds for E_y and E_z .

Prob. 6.9

$$\frac{\partial V}{\partial x} = (-A n \sin nx + B n \cos nx)(C e^{ny} + D e^{-ny})$$

$$\frac{\partial^2 V}{\partial x^2} = (-A n^2 \cos nx - n^2 B \sin nx)(C e^{ny} + D e^{-ny}) = -n^2 V$$

$$\frac{\partial V}{\partial y} = (A \cos nx + B \sin nx)(n C e^{ny} - n D e^{-ny})$$

$$\frac{\partial^2 V}{\partial y^2} = n^2 V$$

Thus

$$\nabla^2 V = \frac{\partial^2 V}{\partial x^2} + \frac{\partial^2 V}{\partial y^2} = -n^2 V + n^2 V = 0$$

Prob. 6.10 (a)

$$\frac{\partial V}{\partial x} = 4xyz, \quad \frac{\partial^2 V}{\partial x^2} = 4yz$$

$$\frac{\partial V}{\partial y} = 2x^2z - 3y^2z, \quad \frac{\partial^2 V}{\partial y^2} = -6yz$$

$$\frac{\partial V}{\partial z} = 2x^2y - y^3, \quad \frac{\partial^2 V}{\partial z^2} = 0$$

$$\nabla^2 V = 4yz - 6yz + 0 = -2yz$$

$\nabla^2 V \neq 0$, V does not satisfy Laplace's equation.

(b)

$$\nabla^2 V = -\frac{\rho_v}{\epsilon} = -2yz \quad \longrightarrow \quad \rho_v = 2yz\epsilon$$

$$Q = \int \rho_v dv = \int \int \int (2yz\epsilon) dx dy dz = 2\epsilon (1) \frac{y^2}{2} |_0^l \frac{z^2}{2} |_0^l = \epsilon / 2 = 2\epsilon_o / 2 = \epsilon_o$$

$Q = 8.854 \text{ pC}$

Prob. 6.11

$$\nabla^2 V = \frac{d^2 V}{dz^2} = 0 \quad \longrightarrow \quad V = Az + B$$

When $z=0$, $V=0 \quad \longrightarrow \quad B=0$

When $z=d$, $V=V_o \quad \longrightarrow \quad V_o = Ad \quad \text{or} \quad A = V_o/d$

Hence,

$$V = \frac{V_o z}{d}$$

$$E = -\nabla V = -\frac{dV}{dz} a_z = -\frac{V_o}{d} a_z$$

$$D = \epsilon E = -\epsilon_o \epsilon_r \frac{V_o}{d} a_z$$

Since $V_o = 50 \text{ V}$ and $d = 2 \text{ mm}$,

$V = 25z \text{ kV}$, $E = -25a_z \text{ kV/m}$

$$D = -\frac{10^{-9}}{36\pi} (1.5) 25 \times 10^3 a_z = \underline{-332 a_z \text{ nC/m}^2}$$

$$\rho_s = D_n = \underline{\pm 332 \text{ nC/m}^2}$$

The surface charge density is positive on the plate at $z=d$ and negative on the plate at $z=0$.

Prob. 6.12 From Example 6.8, solving $\nabla^2 V = 0$ when $V = V(\rho)$ leads to

$$V = \frac{V_o \ln \rho / a}{\ln b / a}$$

$$E = -\nabla V = -\frac{V_o}{\rho \ln b / a} a_\rho, \quad D = \epsilon E = -\frac{\epsilon_o \epsilon_r V_o}{\rho \ln b / a} a_\rho$$

$$\rho_s = D_n = \left. \pm \frac{\epsilon_o \epsilon_r V_o}{\rho \ln b / a} \right|_{\rho=a,b}$$

In this case, $V_o = 100 \text{ V}$, $b = 5 \text{ mm}$, $a = 15 \text{ mm}$, $\epsilon_r = 2$. Hence at $\rho = 10 \text{ mm}$,

$$V = \frac{100 \ln 10 / 5}{\ln 15 / 5} = \underline{\underline{36.91 \text{ V}}}$$

$$E = -\frac{100}{10 \times 10^{-3} \ln 3} a_p = \underline{\underline{-9.102 a_p}}$$

$$D = -9.102 \times 10^3 \times \frac{10^{-9}}{36\pi} 2a_p = \underline{\underline{-161 a_p \text{ nC/m}^2}}$$

$$\rho_s (\rho = 5 \text{ mm}) = \frac{10^{-9}}{36\pi} (2) \frac{10^5}{5 \ln 3} = \underline{\underline{322 \text{ nC/m}^2}}$$

$$\rho_s (\rho = 15 \text{ mm}) = -\frac{10^{-9}}{36\pi} (2) \frac{10^5}{15 \ln 3} = \underline{\underline{-107.3 \text{ nC/m}^2}}$$

Prob. 6.13

$$\nabla^2 V = \frac{1}{\rho} \frac{\partial}{\partial \rho} \left(\rho \frac{\partial V}{\partial \rho} \right) = 0 \quad \longrightarrow \quad V = A \ln \rho + B$$

Let ρ be in cm.

$$V(\rho = 2) = 60 \quad \longrightarrow \quad 60 = A \ln 2 + B$$

$$V(\rho = 6) = -20 \quad \longrightarrow \quad -20 = A \ln 6 + B$$

Thus, $A = -72.82$, $B = 110.47$, and

$$V = 110.47 - 72.82 \ln \rho$$

$$E = -\frac{dV}{d\rho} a_p = -\frac{A}{\rho} a_p = \frac{72.82}{\rho} a_p, \quad D = \epsilon_0 E$$

$$\text{At } \rho = 4, \underline{\underline{V = 9.52 \text{ V}}}, \quad \underline{\underline{E = 18.21 a_p \text{ V/m}}}$$

$$D = \epsilon_0 E = \frac{10^{-9}}{36\pi} \times 18.21 a_p = 0.161 a_p \text{ nC/m}^2$$

Prob. 6.14

$$\nabla^2 V = 0 \quad \longrightarrow \quad V = -A/r + B$$

$$\text{At } r=0.5, \underline{\underline{V=-50}} \quad \longrightarrow \quad -50 = -A/0.5 + B$$

Or

$$-50 = -2A + B \quad (1)$$

$$\text{At } r = 1, V = 50 \longrightarrow 50 = -A + B \quad (2)$$

From (1) and (2), $A = 100$, $B = 150$, and

$$V = -\frac{100}{r} + 150$$

$$E = -\nabla V = -\frac{A}{r^2} a_r = -\frac{100}{r^2} a_r \text{ V/m}$$

Prob. 6.15 From Example 6.4,

$$V = \frac{V_o \ln\left(\frac{\tan\theta/2}{\tan\theta_1/2}\right)}{\ln\left(\frac{\tan\theta_2/2}{\tan\theta_1/2}\right)}$$

$$V_o = 100, \quad \theta_1 = 30^\circ, \quad \theta_2 = 120^\circ, \quad r = \sqrt{3^2 + 0^2 + 4^2} = 5, \quad \theta = \tan^{-1} \rho/z = \tan^{-1} 3/4 = 36.87^\circ$$

$$V = 100 - \frac{\ln\left(\frac{\tan 18.435^\circ}{\tan 15^\circ}\right)}{\ln\left(\frac{\tan 60^\circ}{\tan 15^\circ}\right)} = \underline{\underline{11.7 \text{ V}}}$$

$$E = \frac{-V_o a_\theta}{r \sin\theta \ln\left(\frac{\tan\theta_2/2}{\tan\theta_1/2}\right)} = \frac{-100 a_\theta}{5 \sin 36.87^\circ \ln 6.464} = \underline{\underline{-17.86 a_\theta \text{ V/m}}}$$

Prob. 6.16 (a)

$$\nabla^2 V = \frac{1}{\rho} \frac{\partial}{\partial \rho} \left(\rho \frac{\partial V}{\partial \rho} \right) = 0 \longrightarrow V = A \ln \rho + B$$

$$V(\rho = b) = 0 \longrightarrow 0 = A \ln b + B \longrightarrow B = -A \ln b$$

$$V(\rho = b) = V_o \longrightarrow V_o = A \ln a/b \longrightarrow A = -\frac{V_o}{\ln b/a}$$

$$V = -\frac{V_o}{\ln b/a} \ln \rho/b = \frac{V_o \ln b/\rho}{\ln b/a}$$

$$V(\rho = 15 \text{ mm}) = 70 \frac{\ln 2}{\ln 50} = \underline{\underline{12.4 \text{ V}}}$$

(b) As the electron decelerates, potential energy gained = K.E. loss

$$e[70 - 12.4] = \frac{1}{2}m[(10^7)^2 - u^2] \quad \longrightarrow \quad 10^{14} - u^2 = \frac{2e}{m} \times 57.6$$

$$u^2 = 10^{14} - \frac{2 \times 1.6 \times 10^{-19}}{9.1 \times 10^{-31}} \times 57.6 = 10^{12}(100 - 20.25)$$

$$\underline{u = 8.93 \times 10^6 \text{ m/s}}$$

Prob. 6.17 (a) For the parallel-plate capacitor,

$$E = -\frac{V_o}{d} a_x$$

From Example 6.11,

$$C = \frac{I}{V_o^2} \int \epsilon |E|^2 dv = \frac{I}{V_o^2} \int \epsilon \frac{V_o^2}{d^2} dv = \frac{\epsilon}{d^2} Sd = \frac{\epsilon S}{d}$$

(b) For the cylindrical capacitor,

$$E = -\frac{V_o}{\rho \ln b/a} a_\rho$$

From Example 6.8,

$$C = \frac{I}{V_o^2} \iiint \frac{\epsilon V_o^2}{(\rho \ln b/a)^2} \rho d\rho d\phi dz = \frac{2\pi\epsilon L}{(\ln b/a)^2} \int_a^b \frac{d\rho}{\rho} = \frac{2\pi\epsilon L}{\ln b/a}$$

(c) For the spherical capacitor,

$$E = \frac{V_o}{r^2(1/a - 1/b)} a_r$$

From Example 6.10,

$$C = \frac{I}{V_o^2} \iiint \frac{\epsilon V_o^2}{r^4(1/a - 1/b)^2} r^2 \sin\theta d\theta dr d\phi = \frac{\epsilon}{(1/a - 1/b)^2} 4\pi \int_a^b \frac{dr}{r^2} = \frac{4\pi\epsilon}{\frac{1}{a} - \frac{1}{b}}$$

Prob. 6.18 This is similar to case 1 of Example 6.5.

$$X = c_1 x + c_2, \quad Y = c_3 y + c_4$$

$$\text{But } X(0) = 0 \quad \longrightarrow \quad 0 = c_2, \quad Y(0) = 0 \quad \longrightarrow \quad 0 = c_4$$

Hence,

$$V(x, y) = XY = a_0 xy, \quad a_0 = c_1 c_3$$

$$\text{Also, } V(xy = 4) = 20 \longrightarrow 20 = 4a_0 \longrightarrow a_0 = 5$$

Thus,

$$V(x, y) = 5xy \text{ and } E = -\nabla V = -5ya_x - 5xa_y$$

At $(x, y) = (1, 2)$,

$$\underline{\underline{V = 10 \text{ V}, \quad E = -10a_x - 5a_y \text{ V/m}}}$$

Prob. 6.19 (a) As in Example 6.5, $X(x) = A \sin(m\pi x/b)$

For Y,

$$Y(y) = c_1 \cosh(m\pi y/b) + c_2 \sinh(m\pi y/b)$$

$$Y(a) = 0 \longrightarrow 0 = c_1 \cosh(m\pi a/b) + c_2 \sinh(m\pi a/b) \longrightarrow c_1 = -c_2 \tanh(m\pi a/b)$$

$$V = \sum_{n=1}^{\infty} a_n \sin(m\pi x/b) [\sinh(m\pi y/b) - \tanh(m\pi a/b) \cosh(m\pi y/b)]$$

$$V(x, y = 0) = V_o = - \sum_{n=1}^{\infty} a_n \tanh(m\pi a/b) \sinh(m\pi x/b)$$

$$-a_n \tanh(m\pi a/b) = \frac{2}{b} \int_a^b V_o \sin(m\pi y/b) dy = \begin{cases} \frac{4V_o}{m\pi}, & n = \text{odd} \\ 0, & n = \text{even} \end{cases}$$

Hence,

$$\begin{aligned} V &= -\frac{4V_o}{\pi} \sum_{n=\text{odd}}^{\infty} \sin(m\pi x/b) \left[\frac{\sin(m\pi y/b)}{n \tanh(m\pi a/b)} - \frac{\cosh(m\pi y/b)}{n} \right] \\ &= -\frac{4V_o}{\pi} \sum_{n=\text{odd}}^{\infty} \frac{\sin(m\pi x/b)}{n \sinh(m\pi a/b)} [\sin(m\pi y/b) \cosh(m\pi a/b) - \cosh(m\pi y/b) \sinh(m\pi a/b)] \\ &= -\frac{4V_o}{\pi} \sum_{n=\text{odd}}^{\infty} \frac{\sin(m\pi x/b) \sinh[m\pi(a-y)/b]}{n \sinh(m\pi a/b)} \end{aligned}$$

Alternatively, for Y

$$Y(y) = c_1 \sinh(n\pi(y - c_2)/b)$$

$$Y(a) = 0 \longrightarrow 0 = c_1 \sinh[n\pi(a - c_2)/b] \longrightarrow c_2 = a$$

$$V = \sum_{n=1}^{\infty} b_n \sin(n\pi x/b) \sinh[n\pi(y-a)/b]$$

where

$$b_n = \begin{cases} -\frac{4V_o}{n\pi \sinh(n\pi a/b)}, & n = \text{odd} \\ 0, & n = \text{even} \end{cases}$$

(b) This is the same as Example 6.5 except that we exchange y and x . Hence

$$V(x, y) = \frac{4V_o}{\pi} \sum_{n=\text{odd}}^{\infty} \frac{\sin(n\pi y/a) \sinh n\pi x/a}{n \sinh(n\pi b/a)}$$

(c) This is the same as part (a) except that we must exchange x and y . Hence

$$V(x, y) = \frac{4V_o}{\pi} \sum_{n=\text{odd}}^{\infty} \frac{\sin(n\pi y/b) \sinh[n\pi(a-x)/b]}{n \sinh(n\pi a/b)}$$

Prob. 6.20 (a) $X(x)$ is the same as in Example 6.5. Hence

$$V(x, y) = \sum_{n=1}^{\infty} \sin(n\pi x/b) [a_n \sinh(n\pi y/b) + b_n \cosh(n\pi y/b)]$$

At $y=0$, $V = V_1$

$$V_1 = \sum_{n=1}^{\infty} b_n \sin(n\pi x/b) \longrightarrow b_n = \begin{cases} \frac{4V_1}{n\pi}, & n = \text{odd} \\ 0, & n = \text{even} \end{cases}$$

At $y=a$, $V = V_2$


$$V_2 = \sum_{n=1}^{\infty} \sin(n\pi x/b) [a_n \sinh(n\pi a/b) + b_n \cosh(n\pi a/b)]$$

$$a_n \sinh(n\pi a/b) + b_n \cosh(n\pi a/b) = \begin{cases} \frac{4V_2}{n\pi}, & n = \text{odd} \\ 0, & n = \text{even} \end{cases}$$

or

$$a_n = \begin{cases} \frac{4V_2}{n\pi \sinh(n\pi a/b)} (V_2 - V_1 \cosh(n\pi a/b)), & n = \text{odd} \\ 0, & n = \text{even} \end{cases}$$

Alternatively, we may apply superposition principle.

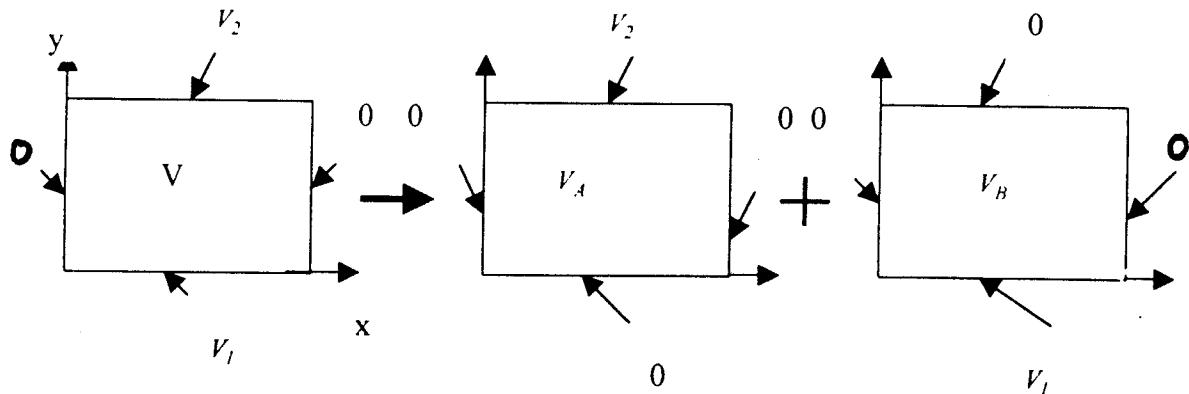

$$\text{i.e. } V = V_A + V_B$$

V_A is exactly the same as Example 6.5 with $V_o = V_2$, while V_B is exactly the same as Prob. 6.19(a). Hence

$$V = \frac{4}{\pi} \sum_{n=\text{odd}}^{\infty} \frac{\sin(n\pi x/b)}{n \sinh(n\pi a/b)} [V_o \sinh[n\pi(a-y)/b] + V_2 \sinh(n\pi y/b)]$$

(b)

$$V(x, y) = (a_1 e^{-\alpha x} + a_2 e^{+\alpha x})(a_3 \sin \alpha y + a_4 \cos \alpha y)$$

$$\lim_{x \rightarrow \infty} V(x, y) = 0 \longrightarrow a_2 = 0$$

$$V(x, y=0) = 0 \longrightarrow a_4 = 0$$

$$V(x, y=a) = 0 \longrightarrow \alpha = n\pi/a, \quad n = 1, 2, 3, \dots$$


Hence,

$$V(x, y) = \sum_{n=1}^{\infty} a_n e^{-n\pi x/a} \sin(n\pi y/a)$$

$$V(x=0, y) = V_o = \sum_{n=1}^{\infty} a_n \sin(n\pi y/a) \longrightarrow a_n = \begin{cases} \frac{4V_o}{n\pi}, & n = \text{odd} \\ 0, & n = \text{even} \end{cases}$$

$$V(x, y) = \frac{4V_o}{\pi} \sum_{n=\text{odd}}^{\infty} \frac{\sin(n\pi y/a)}{n} \exp(-n\pi x/a)$$

(d) The problem is easily solved using superposition theorem, as illustrated below.

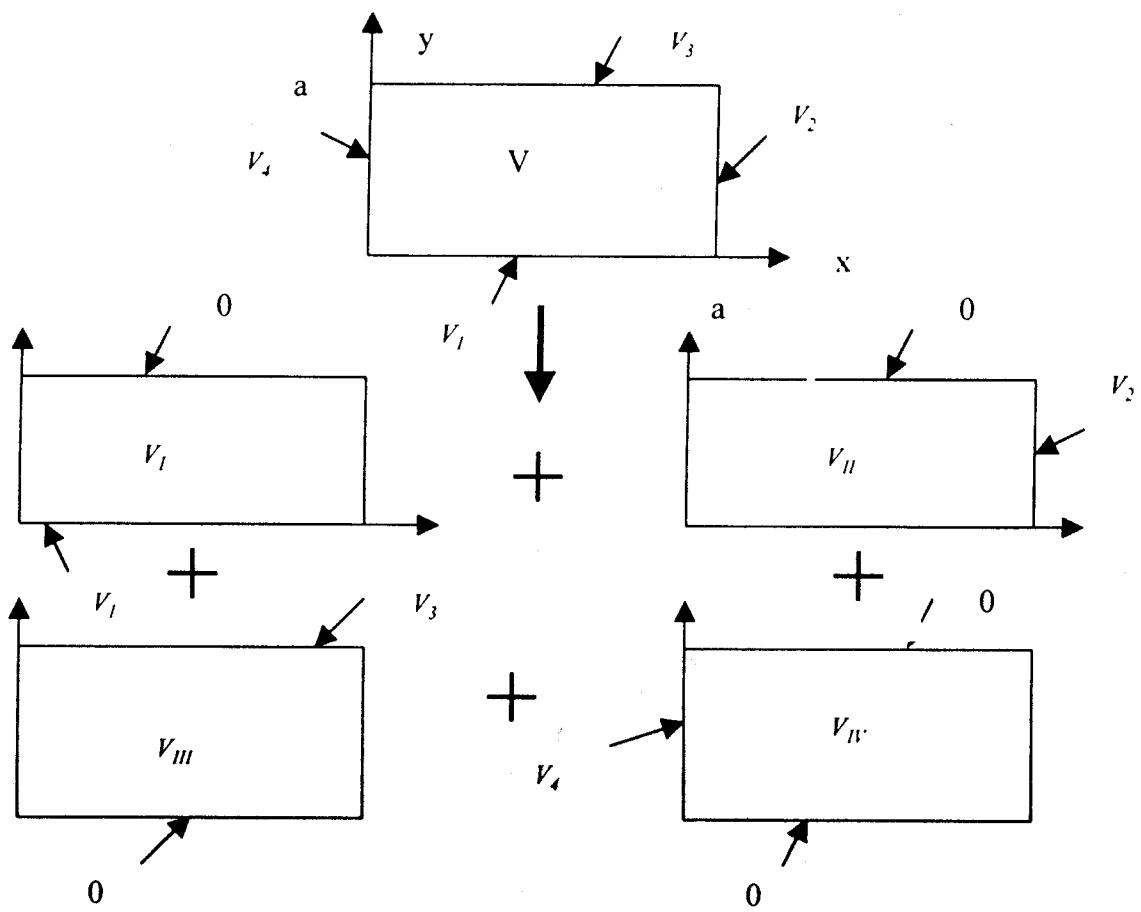

Therefore,

$$V = V_I + V_{II} + V_{III} + V_{IV}$$

where

$$V_I = \frac{4V_1}{\pi} \sum_{n=odd}^{\infty} \frac{\sin(n\pi x/b) \sinh[n\pi(a-y)/b]}{n \sinh(n\pi a/b)}$$

$$V_{II} = \frac{4V_2}{\pi} \sum_{n=odd}^{\infty} \frac{\sin(n\pi x/a) \sinh(n\pi y/a)}{n \sinh(n\pi b/a)}$$

$$V_{III} = \frac{4V_3}{\pi} \sum_{n=odd}^{\infty} \frac{\sin(n\pi x/b) \sinh(n\pi y/b)}{n \sinh(n\pi a/b)}$$

$$V_{IV} = \frac{4V_4}{\pi} \sum_{n=odd}^{\infty} \frac{\sin(n\pi y/a) \sinh[n\pi(b-x)/a]}{n \sinh(n\pi b/a)}$$

Prob. 6.21

$$\nabla^2 V = \frac{I}{\rho} \frac{\partial}{\partial \rho} \left(\rho \frac{\partial V}{\partial \rho} \right) + \frac{I}{\rho^2} \frac{\partial^2 V}{\partial \phi^2} = 0$$

If we let $V(\rho, \phi) = R(\rho)\Phi(\phi)$,

$$\frac{\Phi}{\rho} \frac{\partial}{\partial \rho} (\rho R') + \frac{I}{\rho^2} R \Phi'' = 0$$

or

$$\frac{\rho}{R} \frac{\partial}{\partial \rho} (\rho R') = -\frac{\Phi''}{\Phi} = \lambda$$

Hence

$$\underline{\underline{\Phi'' + \lambda \Phi = 0}}$$

...1d

$$\frac{\partial}{\partial \rho} (\rho R') - \frac{\lambda R}{\rho} = 0$$

or

$$\underline{\underline{R'' + \frac{R'}{\rho} - \frac{\lambda R}{\rho^2} = 0}}$$

Prob. 6.22

$$\nabla^2 V = \frac{I}{r^2} \frac{\partial}{\partial r} \left(r^2 \frac{\partial V}{\partial r} \right) + \frac{I}{r^2 \sin \theta} \frac{\partial}{\partial \theta} (\sin \theta \frac{\partial V}{\partial \theta}) = 0$$

If $V(r, \theta) = R(r)F(\theta)$, $r \neq 0$,

$$F \frac{d}{dr} (r^2 R') + \frac{R}{\sin \theta} \frac{d}{d\theta} (\sin \theta F') = 0$$

Dividing through by RF gives

$$\frac{I}{R} \frac{d}{dr} (r^2 R') = -\frac{I}{F \sin \theta} \frac{d}{d\theta} (\sin \theta F') = \lambda$$

Hence,

$$\sin \theta F'' + \cos \theta F' + \lambda F \sin \theta = 0$$

or

$$F'' + \cot \theta F' + \lambda F = 0$$

$$R' = \lim_{h \rightarrow \infty} \frac{\frac{I}{a} - \frac{I}{b}}{4\pi\sigma} = \frac{I}{2\pi a \sigma}$$

$$G = I / R' = 2\pi a \sigma$$

Alternatively, for an isolated sphere, $C = 4\pi\epsilon_0 a$. But

$$RC = \frac{\epsilon}{\sigma} \quad \longrightarrow \quad R = \frac{I}{4\pi a \sigma}$$

$$R' = 2R = \frac{I}{2\pi a \sigma} \quad \text{or} \quad G = 2\pi a \sigma$$


Prob. 6.26 $I = 1.5 \text{ mm}, S = 3 \times 4 + 1 \times 4 + 3 \times 4 = 28 \text{ cm}^2$

$$R = \frac{I}{\sigma S} = \frac{1.5 \times 10^{-3}}{5.8 \times 10^7 \times 28 \times 10^{-4}} = \underline{\underline{9.236 \text{ n}\Omega}}$$

Prob. 6.27

$$C = \frac{\epsilon S}{d} \quad \longrightarrow \quad S = \frac{Cd}{\epsilon_0 \epsilon_r} = \frac{2 \times 10^{-9} \times 10^{-6}}{4 \times 10^{-9} / 36\pi} \text{ m}^2 = \underline{\underline{0.5655 \text{ cm}^2}}$$

Prob. 6.28

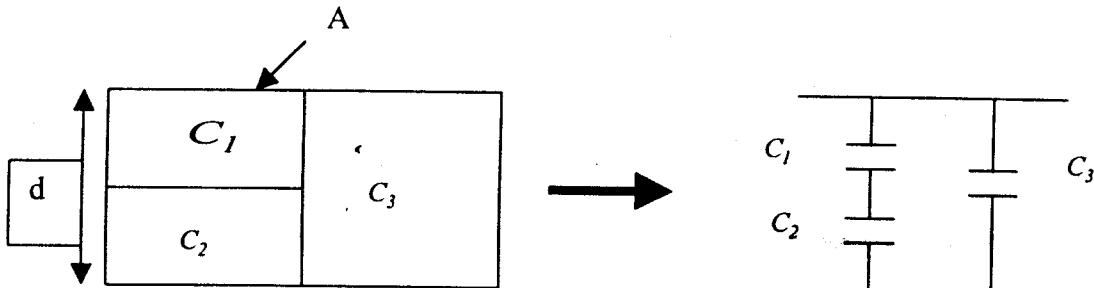


From the figure above,

$$C = \frac{C_1 C_2}{C_1 + C_2} + C_3$$

where

$$C_1 = \frac{\epsilon_0 A / 2}{d / 2} = \frac{\epsilon_0 A}{d}, \quad C_2 = \frac{\epsilon_0 \epsilon_r A}{d}, \quad C_3 = \frac{\epsilon_0 A}{2d}$$

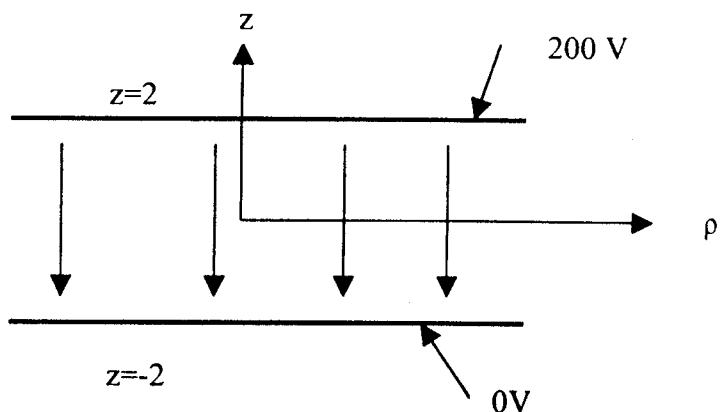Prob. 6.31

Let z be in cm

$$\frac{d^2V}{dz^2} = 0 \longrightarrow V = Az + B$$

$$\text{When } z = -2, V = 0 \longrightarrow 0 = -2A + B \text{ or } B = 2A$$

$$\text{When } z = 2, V = 200 \longrightarrow 200 = 2A + 2A \longrightarrow A = 50$$

$$V = 50z + 100$$

$$(a) V(z=0) = \underline{100 \text{ V}}$$

$$(b) E = -\nabla V = -Aa_z = -50a_z \text{ V/cm} = -5a_z \text{ kV/m}$$

$$\rho_s = D_n = \epsilon E_n = \epsilon E \bullet a_n'$$

$$\text{At the upper plate (z=2), } a_n = -a_z$$

$$\begin{aligned} \rho_s &= 5000\epsilon_0\epsilon_r = 5000 \times 2.25 \times \frac{10^{-9}}{36\pi} \\ &= \underline{\underline{99.5 \text{ nC/m}^2}} \end{aligned}$$

$$\text{At the lower plate (z=-2), } a_n = +a_z$$

$$\underline{\underline{\rho_s = -99.5 \text{ nC/m}^2}}$$

Prob. 6.32 (a)

$$C = \frac{Q}{V_o} = \frac{\epsilon_0 \epsilon_r S}{d} = 5.6 \times \frac{10^{-9}}{36\pi} \times \frac{80 \times 10^{-4}}{6.4 \times 10^{-4}} = \underline{\underline{619 \text{ pF}}}$$

(b)

$$C = \frac{Q}{V_o} \quad \longrightarrow \quad V_o = Q/C$$

$$E = -\nabla V = -3a_x - 4a_y + 12a_z \text{ kV/m} \quad \longrightarrow \quad |E| = \sqrt{3^2 + 4^2 + 12^2} = 13 \text{ kV/m}$$

$$\rho_s = D_n = \epsilon_0 |E|$$

Since the entire E is normal to each conducting plate.

$$Q = \rho_s S = \epsilon_0 |E| S$$

$$V_o = Q/C = \epsilon_0 |E| S \frac{d}{\epsilon_0 \epsilon_r S} = \frac{|E| d}{\epsilon_r} = \frac{13 \times 10^3 \times 0.64 \times 10^{-3}}{5.6} = \underline{\underline{14.86 \text{ V}}}$$

Prob. 6.33 (a)

$$C = \frac{4\pi\epsilon}{\frac{l}{a} - \frac{l}{b}} = \frac{4\pi \times 2.25 \times \frac{10^{-9}}{36\pi}}{\frac{1}{5 \times 10^{-2}} - \frac{1}{10 \times 10^{-2}}} = \underline{\underline{25 \text{ pF}}}$$

$$(b) \quad Q = C V_o = 25 \times 80 \text{ pC}$$

$$\rho_s = \frac{Q}{4\pi r^2} = \frac{25 \times 80}{4\pi \times 25 \times 10^{-4}} \text{ pC/m}^2 = \underline{\underline{63.66 \text{ nC/m}^2}}$$

Prob. 6.34 (a)

$$\nabla^2 V = 0 \quad \longrightarrow \quad V = -\frac{A}{r} + B$$

$$\text{When } r=20\text{cm}, \quad V=0 \quad \longrightarrow \quad 0 = -A/0.2 + B \quad \text{or} \quad B = 5A$$

$$\text{When } r=30\text{cm}, \quad V=50 \quad \longrightarrow \quad 50 = -A/0.3 + 5A \quad \text{or} \quad A = 30, \quad B = 150$$

$$V = -\frac{30}{r} + 150 \text{ V}$$

$$E = -\nabla V = -\frac{A}{r^2} a_r = -\frac{30}{r^2} a_r \text{ V/m}$$

$$D = \epsilon_0 \epsilon_o E = -\frac{30 \times 3.1}{r^2} \times \frac{10^{-9}}{36\pi} a_r = -\frac{0.8223}{r^2} a_r \text{ nC/m}^2$$

(b) $\rho_s = D_n = D \bullet a_n$

On $r = 30\text{cm}$, $a_n = -a_r$

$$\rho_s = \frac{0.8223}{0.3^2} \text{ nC/m}^2 = \underline{\underline{9.137 \text{ nC/m}^2}}$$



On $r = 20\text{cm}$, $a_n = +a_r$

$$\rho_s = -\frac{0.8223}{0.2^2} \text{ nC/m}^2 = \underline{\underline{-20.56 \text{ nC/m}^2}}$$

(c)

$$R = \frac{\frac{l}{a} - \frac{l}{b}}{\frac{4\pi\sigma}{4\pi \times 10^{-12}}} = \frac{l}{0.2} - \frac{l}{0.3} = \underline{\underline{132.6 \text{ G}\Omega}}$$

Prob. 6.35

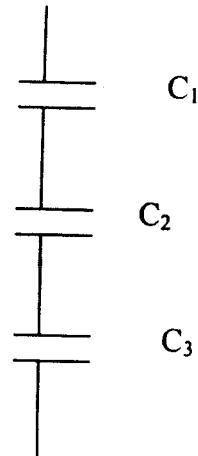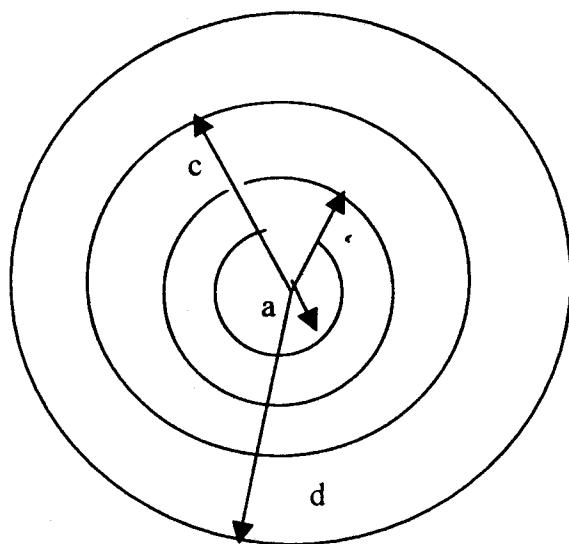

$$\frac{l}{C} = \frac{l}{C_1} + \frac{l}{C_2} + \frac{l}{C_3}$$

$$\text{where } C_1 = \frac{4\pi\epsilon_0}{\frac{c-d}{l}}, \quad C_2 = \frac{4\pi\epsilon_0}{\frac{b-c}{l}}, \quad C_3 = \frac{4\pi\epsilon_0}{\frac{a-b}{l}},$$

$$\frac{4\pi}{C} = \frac{1/c - 1/d}{\epsilon_1} + \frac{1/b - 1/c}{\epsilon_2} + \frac{1/a - 1/b}{\epsilon_3}$$

$$C = \frac{\frac{4\pi}{\epsilon_1}}{\frac{1}{c} - \frac{1}{d} + \frac{1}{b} - \frac{1}{c} + \frac{1}{a} - \frac{1}{b}}$$

Prob. 6.36

$$C = \frac{\frac{4\pi\epsilon}{l}}{\frac{1}{a} - \frac{1}{b}}$$

Since $b \rightarrow \infty$,

$$C = 4\pi\alpha\epsilon_0\epsilon_r = 4\pi \times 5 \times 10^{-2} \times 80 \times \frac{10^{-9}}{36\pi} = \underline{\underline{444 \text{ pF}}}$$

Prob. 6.37

$$C = \frac{\frac{4\pi\epsilon}{l}}{\frac{1}{a} - \frac{1}{b}} = \frac{4\pi \times 5.9 \times 10^{-9} / 36\pi}{\left(\frac{1}{2} - \frac{1}{5}\right) \times 10^{-2}} = \underline{\underline{21.85 \text{ pF}}}$$

Prob. 6.38

$$C = \frac{2\pi\epsilon_0 L}{\ln(b/a)} = \frac{2\pi \times \frac{10^{-9}}{36\pi} \times 100 \times 10^{-6}}{\ln(600/20)} = 1.633 \times 10^{-15}$$

$$V = Q/C = \frac{50 \times 10^{-15}}{1.633 \times 10^{-15}} = \underline{\underline{30.62 \text{ V}}}$$

Prob. 6.39 $V = V_o e^{-t/T_r}$, where $T_r = RC = 10 \times 10^{-6} \times 100 \times 10^6 = 1000$

$$50 = 100e^{-t/T_r} \longrightarrow 2 = e^{t/T_r}$$


$$t = 1000 \ln 2 = \underline{\underline{693.1 \text{ s}}}$$

Prob. 6.40

$$RC = C/G = \epsilon / \sigma \quad \longrightarrow \quad G = \frac{C\sigma}{\epsilon}$$

$$\underline{\underline{G = \frac{\pi\sigma}{\cosh^{-1}(d/2a)}}}$$

Prob. 6.41 $E = \frac{Q}{4\pi\epsilon r^2} a_r$

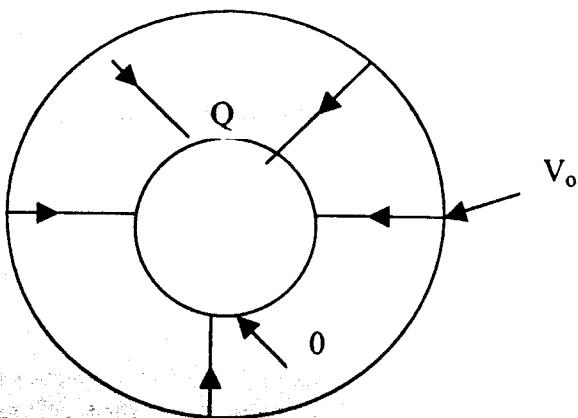

$$W = \frac{1}{2} \int \epsilon |E|^2 dv = \iiint \frac{Q^2}{32\pi^2 \epsilon^2 r^2} \epsilon r^2 \sin\theta d\theta d\phi dr$$

$$= \frac{Q^2}{32\pi^2 \epsilon} (2\pi)(2) \int_b^c \frac{dr}{r^2} = \frac{Q^2}{8\pi\epsilon} \left(\frac{1}{c} - \frac{1}{b} \right)$$

$$W = \frac{Q^2(b-c)}{8\pi\epsilon bc}$$

Prob. 6.42 (a) Method 1: $E = \frac{\rho_s}{\epsilon} (-a_x)$, where ρ_s is to be determined.

$$V_o = - \int E \cdot dl = - \int \frac{-\rho_s}{\epsilon} dx = \rho_s \int_0^d \frac{1}{\epsilon} \frac{d}{d+x} dx = \frac{\rho_s}{\epsilon} d \ln(x+d) \Big|_0^d$$

$$V_o = \rho_s d \ln \frac{2d}{d} \quad \longrightarrow \quad \rho_s = \frac{V_o \epsilon_o}{d \ln 2}$$

$$\underline{\underline{E = -\frac{\rho_s}{\epsilon} a_x = -\frac{V_o}{(x+d) \ln 2} a_x}}$$

Method 2: We solve Laplace's equation

$$\nabla \bullet (\epsilon \nabla V) = \frac{d}{dx} (\epsilon \frac{dV}{dx}) = 0 \quad \longrightarrow \quad \epsilon \frac{dV}{dx} = A$$

$$\frac{dV}{dx} = \frac{A}{\epsilon} = \frac{Ad}{\epsilon_o(x+d)} = \frac{c_1}{x+d}$$

$$V = c_1 \ln(x+d) + c_2$$

$$V(x=0) = 0 \quad \longrightarrow \quad 0 = c_1 \ln d + c_2 \quad \longrightarrow \quad c_2 = -c_1 \ln d$$

$$V(x=d) = V_o \quad \longrightarrow \quad V_o = c_1 \ln 2d - c_1 \ln d = c_1 \ln 2$$


$$c_1 = \frac{V_o}{\ln 2}$$

$$V = c_1 \ln \frac{x+d}{d} = \frac{V_o}{\ln 2} \ln \frac{x+d}{d}$$

$$E = - \frac{dV}{dx} a_x = - \frac{V_o}{(x+d) \ln 2} a_x$$

$$(b) \quad P = (\epsilon_r - 1)\epsilon_o E = - \left(\frac{x+d}{d} - 1 \right) \frac{\epsilon_o V_o}{(x+d) \ln 2} a_x = - \frac{\epsilon_o x V_o}{d(x+d) \ln 2} a_x$$

(c)

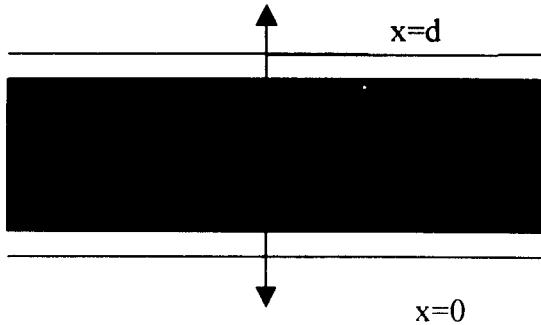

$$\rho_{PV}|_{x=0} = P \bullet (-a_x)|_{x=0} = 0$$

$$\rho_{PV}|_{x=d} = P \bullet a_x|_{x=d} = - \frac{\epsilon_o V_o}{2d \ln 2}$$

$$(d) \quad Q = \int \rho_s dS = \rho_s S = \frac{\epsilon_0 S V_o}{d \ln 2}$$

$$C = \frac{Q}{V_o} = \frac{\epsilon_0 S}{d \ln 2} = \frac{10^{-9}}{36\pi} \frac{200 \times 10^{-4}}{2.5 \times 10^{-3} \ln 2} = \underline{\underline{102 \text{ pF}}}$$

Prob. 6.43 Method 1: Using Gauss's law,

$$Q = \int D \bullet dS = 4\pi r D_r \quad \longrightarrow \quad D = \frac{Q}{4\pi r^2} a_r$$

$$E = D / \epsilon = \frac{Q}{4\pi \epsilon_0 k} a_r$$

$$V = - \int E \bullet dl = - \frac{Q}{4\pi \epsilon_0 k} \int_a^b dr = \frac{Q}{4\pi \epsilon_0 k} (b - a)$$

$$C = \frac{Q}{|V|} = \frac{4\pi \epsilon_0 k}{\underline{\underline{b - a}}}$$

Method 2: Using the inhomogeneous Laplace's equation,

$$\nabla \bullet (\epsilon \nabla V) = 0 \quad \longrightarrow \quad \frac{1}{r^2} \frac{d}{dr} \left(\frac{\epsilon_0 k}{r^2} r^2 \frac{dV}{dr} \right) = 0$$

$$\epsilon_0 k \frac{dV}{dr} = A' \quad \longrightarrow \quad \frac{dV}{dr} = A \quad \text{or} \quad V = Ar + B$$

$$V(r=a) = 0 \quad \longrightarrow \quad 0 = Aa + B \quad \longrightarrow \quad B = -Aa$$

$$V(r=b) = V_o \quad \longrightarrow \quad V_o = Ab + B = A(b-a) \quad \longrightarrow \quad A = \frac{V_o}{b-a}$$

$$E = - \frac{dV}{dr} a_r = -Aa_r = - \frac{V_o}{b-a} a_r$$

$$\rho_s = D_n = - \frac{V_o}{b-a} \frac{\epsilon_0 k}{r^2} \Big|_{r=a,b}$$


$$Q = \int \rho_s dS = - \frac{V_o \epsilon_0 k}{b-a} \iint \frac{1}{r^2} r^2 \sin \theta d\theta d\phi = - \frac{V_o \epsilon_0 k}{b-a} 4\pi$$

$$C = \frac{|Q|}{V_o} = \frac{4\pi \epsilon_0 k}{\underline{\underline{b-a}}}$$

Prob. 6.44 Method 1: We use Laplace's equation for inhomogeneous medium.

$$\nabla \cdot \nabla V = 0 = \frac{1}{\rho} \frac{d}{d\rho} \left(\rho \epsilon \frac{dV}{d\rho} \right) = 0$$

$$\frac{d}{d\rho} \left(\rho \frac{\epsilon_o k}{\rho} \frac{dV}{d\rho} \right) = 0$$

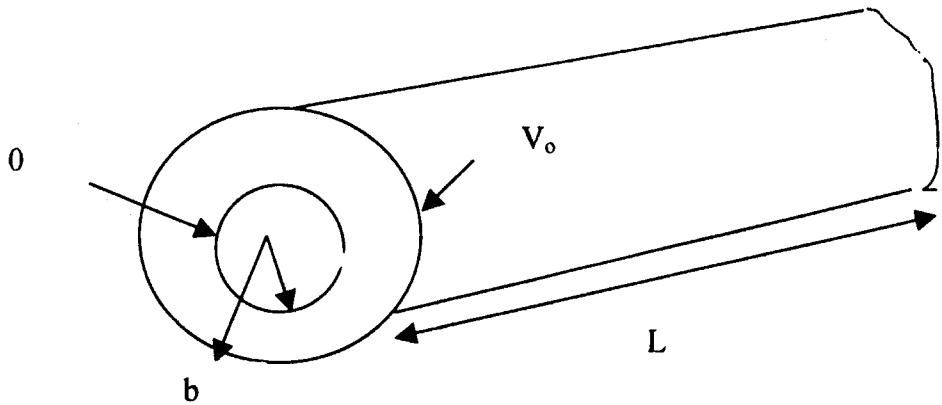

$$\epsilon_o k \frac{dV}{d\rho} = A' \quad \longrightarrow \quad \frac{dV}{d\rho} = A \quad \text{or} \quad V = A\rho + B$$

$$V(\rho = a) = 0 \quad \longrightarrow \quad 0 = Aa + B \quad \longrightarrow \quad B = -Aa$$

$$V(\rho = b) = V_o \quad \longrightarrow \quad V_o = Ab + B = A(b-a) \quad \longrightarrow \quad A = \frac{V_o}{b-a}$$


$$E = -\frac{dV}{dr} a_p = -Aa_p = -\frac{V_o}{b-a} a_p$$

$$\rho_s = D_n = \epsilon E_n$$

$$\text{On } \rho = b, \quad a_p = -a_p$$

$$\rho_s = \frac{V_o}{b-a} \frac{\epsilon_o k}{\rho}, \quad dS = \rho d\phi dz$$

$$Q = \int \rho_s ds = \iint \frac{V_o}{b-a} \frac{\epsilon_o k}{\rho} \rho d\phi dz = 2\pi L \frac{V_o}{b-a} \epsilon_o k$$

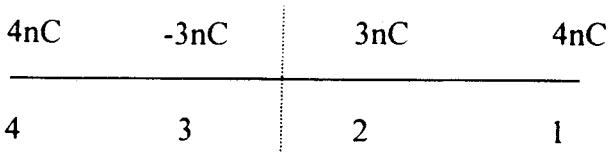
Prob. 6.47

$$(a) Q_i = -(3nC - 4nC) = \underline{1nC}$$

(b) The force of attraction between the charges and the plates is

$$F = F_{13} + F_{14} + F_{23} + F_{24}$$

$$|F| = \frac{10^{-18}}{4\pi \times 10^{-9} / 36\pi} \left[\frac{9}{2^2} - \frac{2(12)}{3^2} + \frac{16}{4^2} \right] = \underline{\underline{5.25 \text{ nN}}}$$

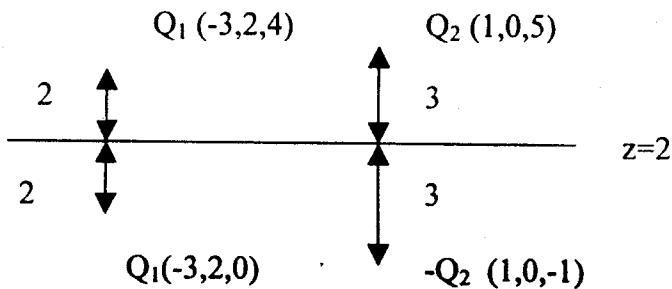Prob. 6.48

$$\begin{aligned} D(x, y, z) &= \frac{Q_1}{4\pi} \left[\frac{(x, y, z) - (-3, 2, 4)}{|(x, y, z) - (-3, 2, 4)|^3} - \frac{(x, y, z) - (-3, 2, 0)}{|(x, y, z) - (-3, 2, 0)|^3} \right] \\ &\quad + \frac{Q_2}{4\pi} \left[\frac{(x, y, z) - (1, 0, 5)}{|(x, y, z) - (1, 0, 5)|^3} - \frac{(x, y, z) - (1, 0, 1)}{|(x, y, z) - (1, 0, 1)|^3} \right] \\ &= \frac{50}{4\pi} \left[\frac{(x+3, y-2, z-4)}{|(x+3)^2 + (y-2)^2 + (z-4)^2|^{3/2}} - \frac{(x+3, y-2, z)}{|(x+3)^2 + (y-2)^2 + z^2|^{3/2}} \right] \\ &\quad - \frac{20}{4\pi} \left[\frac{(x-1, y, z-5)}{|(x-1)^2 + y^2 + (z-5)^2|^{3/2}} - \frac{(x-1, y, z+1)}{|(x-1)^2 + y^2 + (z+1)^2|^{3/2}} \right] \end{aligned}$$

(a) At $(x, y, z) = (7, -2, 2)$,

$$\begin{aligned} \rho_s &= D_z|_{z=2} = \frac{50}{4\pi} \left[\frac{2-4}{(10^2 + 4^2 + 2^2)^{3/2}} - \frac{2}{(10^2 + 4^2 + 2^2)^{3/2}} \right] \\ &\quad - \frac{20}{4\pi} \left[\frac{-3}{(6^2 + 4^2 + 3^2)^{3/2}} - \frac{3}{(6^2 + 4^2 + 3^2)^{3/2}} \right] \text{nC/m}^2 \end{aligned}$$

Prob. 6.51 (a)

$$E = E_+ + E_- = \frac{\rho_L}{2\pi\epsilon_0} \left(\frac{a_{\rho L}}{\rho_1} - \frac{a_{\rho 2}}{\rho_2} \right) = \frac{16 \times 10^{-9}}{2\pi \times 10^{-9} / 36\pi} \left[\frac{(2, -2, 3) - (3, -2, 4)}{|(2, -2, 3) - (3, -2, 4)|^2} - \frac{(2, -2, 3) - (3, -2, -4)}{|(2, -2, 3) - (3, -2, -4)|^2} \right]$$


$$= 18 \times 16 \left[\frac{(-1, 0, 1)}{2} - \frac{(-1, 0, 7)}{50} \right] = \underline{\underline{-138.2a_x - 184.3a_y \text{ V/m}}}$$

(b) $\rho_s = D_n$

$$D = D_+ + D_- = \frac{\rho_L}{2\pi} \left(\frac{a_{\rho L}}{\rho_1} - \frac{a_{\rho 2}}{\rho_2} \right) = \frac{16 \times 10^{-9}}{2\pi} \left[\frac{(5, -2, 0) - (3, -2, 4)}{|(5, -2, 0) - (3, -2, 4)|^2} - \frac{(5, -6, 0) - (3, -2, -4)}{|(5, -6, 0) - (3, -2, -4)|^2} \right]$$

$$= \frac{8}{\pi} \left[\frac{(2, 0, -4)}{20} - \frac{(2, 0, 4)}{20} \right] \text{nC/m}^2 = \underline{\underline{-1.018a_z \text{ nC/m}^2}}$$

$$\rho_s = -1.018 \text{ nC/m}^2$$

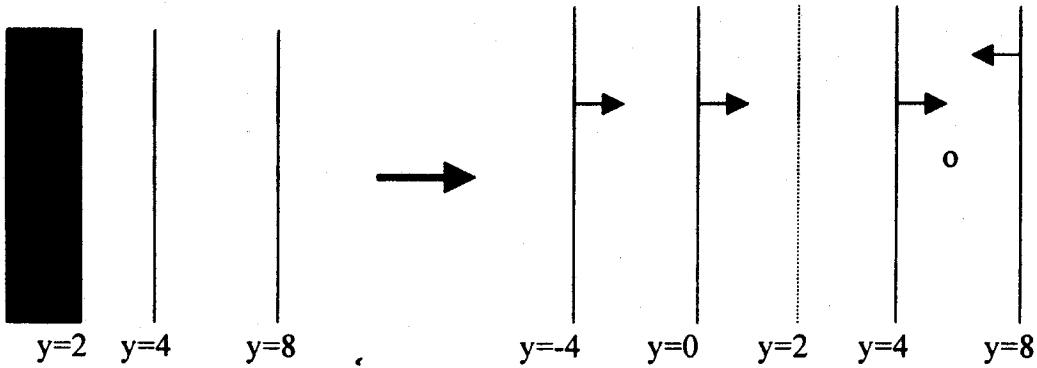Prob. 6.52


At $P(0,0,0)$, $\underline{\underline{\mathbf{E}=0}}$ since \mathbf{E} does not exist for $y < 2$.

At $Q(-4,6,2)$, $y=6$ and

$$E = \sum \frac{\rho_s}{2\epsilon_0} a_n = \frac{10^{-9}}{2\pi \times 10^{-9} / 36\pi} (-30a_y + 20a_y + 20a_y + 30a_y) = \underline{\underline{2.262a_y \text{ kV/m}}}$$

CHAPTER 7

P.E. 7.1

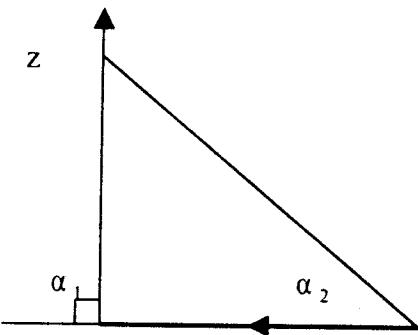

$$\rho = 5, \cos\alpha_1 = 0, \cos\alpha_2 = \sqrt{\frac{2}{27}}$$

$$\mathbf{a}_\phi = \mathbf{a}_1 \times \mathbf{a}_\rho = \left(\frac{-\mathbf{a}_x - \mathbf{a}_y}{\sqrt{2}} \right) \times \mathbf{a}_z = \frac{-\mathbf{a}_x - \mathbf{a}_y}{\sqrt{2}}$$

$$H_z = \frac{10}{4\pi(5)} \left(\sqrt{\frac{2}{27}} - 0 \right) \left(\frac{-\mathbf{a}_x + \mathbf{a}_y}{2} \right) = \underline{-30.03\mathbf{a}_x + 30.6\mathbf{a}_y} \text{ mA/m}$$

P.E. 7.2

$$(a) H = \frac{2}{4\pi(2)} \left(1 + \frac{3}{\sqrt{13}} \right) \mathbf{a}_z = \underline{0.1458} \text{ A/m}$$

$$(b) \rho = \sqrt{3^2 + 4^2} = 5, \alpha_2 = 0, \cos\alpha_1 = -\frac{12}{13},$$

$$\mathbf{a}_\phi = \mathbf{a}_y \times \left(\frac{3\mathbf{a}_x - 4\mathbf{a}_z}{5} \right) = \frac{4\mathbf{a}_x + 3\mathbf{a}_z}{5}$$

$$H = \frac{2}{4\pi(5)} \left(1 + \frac{12}{13} \right) \left(\frac{4\mathbf{a}_x + 3\mathbf{a}_z}{5} \right) = \frac{1}{26\pi} (4\mathbf{a}_x + 3\mathbf{a}_z)$$

$$= \underline{48.97\mathbf{a}_x + 36.73\mathbf{a}_z} \text{ mA/m}$$

P.E. 7.3

(a) From Example 7.3,

$$H = \frac{Ia^2}{2(a^2 + z^2)^{3/2}} \mathbf{a}_z$$

At (0,0,1), z = 2cm,

$$H = \frac{50 \times 10^{-3} \times 25 \times 10^{-4}}{2(5^2 + 2^2)^{3/2} \times 10^{-6}} \mathbf{a}_z \text{ A/m}$$

$$= 400.2 \mathbf{a}_z \text{ A/m}$$

(b) At (0,0,10cm), z = 9cm,

$$H = \frac{50 \times 10^{-3} \times 25 \times 10^{-4}}{2(5^2 + 9^2)^{3/2} \times 10^{-6}} a_z \\ = 57.3 a_z \text{ mA/m}$$


P.E. 7.4

$$H = \frac{NI}{2L} (\cos\theta_2 - \cos\theta_1) a_z = \frac{2 \times 10^3 \times 50 \times 10^{-3} (\cos\theta_2 - \cos\theta_1) a_z}{2 \times 0.75} \\ = \frac{100}{1.5} (\cos\theta_2 - \cos\theta_1) a_z$$

(a) At (0,0,0), $\theta = 90^\circ$, $\cos\theta_2 = \frac{0.75}{\sqrt{0.75^2 + 0.05^2}}$
 $= 0.9978$


$$H = \frac{100}{1.5} (0.9978 - 1) a_z$$

$$= 66.52 a_z \text{ A/m}$$

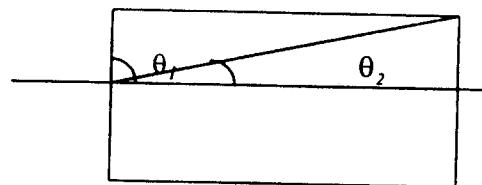

(b) At (0,0,0.75), $\theta_2 = 90^\circ$, $\cos\theta_1 = -0.9978$


$$H = \frac{100}{1.5} (0 + 0.9978) a_z \\ = 66.52 a_z \text{ A/m}$$

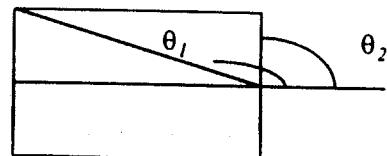

(c) At (0,0,0.5), $\cos\theta_1 = \frac{-0.5}{\sqrt{0.5^2 + 0.05^2}} = -0.995$

$$\cos\theta_2 = \frac{0.25}{\sqrt{0.25^2 + 0.05^2}} = 0.9806$$

$$H = \frac{100}{1.5} (0.9806 + 0.995) a_z \\ = 131.7 a_z \text{ A/m}$$



P.E. 7.5

$$H = \frac{l}{2} k \times a_n$$

(a) $H(0,0,0) = \frac{l}{2} 50 a_z \times (-a_y) = \underline{\underline{25a_x}} \text{ mA/m}$

(b) $H(1.5, -3) = \frac{l}{2} 50 a_z \times a_y = \underline{\underline{-25a_x}} \text{ mA/m}$

$$\hat{c}s = \hat{c}x\hat{c}y, \mathbf{k} = k_y \mathbf{a}_y,$$

$$\mathbf{R} = (-x, -y, h),$$

$$\mathbf{k} \times \mathbf{R} = (ha_x + xa_z)\mathbf{k}_y,$$

$$\mathbf{H} = \frac{\int k_y(ha_x + xa_z)\hat{c}x\hat{c}y}{4\pi(x^2 + y^2 + h^2)^{3/2}} = \frac{k_y ha_x}{4\pi} \int_{-x-x}^x \int_{-x-x}^x \frac{\hat{c}x\hat{c}y}{(x^2 + y^2 + h^2)^{3/2}} + \frac{k_y a_z}{4\pi} \int_{-x-x}^x \int_{-x-x}^x \frac{x\hat{c}x\hat{c}y}{(x^2 + y^2 + h^2)^{3/2}}$$

The integrand in the last term is zero because it is an odd function of x.

$$H = \frac{k_y ha_x}{4\pi} \int_{\rho=0}^{2\pi} \int_{\phi=0}^{\pi} \frac{\rho \partial \phi \partial \rho}{(\rho^2 + h^2)^{3/2}} = \frac{k_y h 2\pi a_z}{4\pi} \int_0^\pi (\rho^2 + h^2)^{-3/2} \frac{\hat{c}(\rho^2)}{2}$$

$$= \frac{k_y h}{2} \mathbf{a}_z \left(\frac{-1}{(\rho^2 + h^2)^{1/2}} \right) \Big|_{\rho=0}^{\pi} = \frac{k_y}{2} \mathbf{a}_z$$

Similarly, for point (0,0,-h), $\mathbf{H} = -\frac{1}{2}k_y \mathbf{a}_x$

Hence,

$$H = \begin{cases} \frac{1}{2}k_y \mathbf{a}_z, & z>0 \\ -\frac{1}{2}k_y \mathbf{a}_x, & z<0 \end{cases}$$

Prob. 7.1

(a) See text

(b) Let $\mathbf{H} = \mathbf{H}_y + \mathbf{H}_z$

$$\text{For } \mathbf{H}_z = \frac{\mathbf{I}}{2\pi\rho} \mathbf{a}_\phi, \quad \rho = \sqrt{(-3)^2 + 4^2} = 5$$

$$\mathbf{a}_\phi = -\mathbf{a}_z \times \frac{(-3\mathbf{a}_x + 4\mathbf{a}_y)}{5} = \frac{(3\mathbf{a}_y - 4\mathbf{a}_x)}{5}$$

$$\mathbf{H}_z = \frac{20}{2\pi(25)} (4\mathbf{a}_x + 3\mathbf{a}_y) = 0.5093\mathbf{a}_x + 0.382\mathbf{a}_y$$

$$\text{For } \mathbf{H}_y = \frac{\mathbf{I}}{2\pi\rho} \mathbf{a}_\phi, \quad \rho = \sqrt{(-3)^2 + 5^2} = \sqrt{34}$$


$$\mathbf{a}_\phi = \mathbf{a}_y \times \frac{(-3\mathbf{a}_x + 5\mathbf{a}_z)}{\sqrt{34}} = \frac{3\mathbf{a}_z - 5\mathbf{a}_x}{\sqrt{34}}$$

$$\mathbf{H}_y = \frac{10}{2\pi(34)} (-5\mathbf{a}_x + 3\mathbf{a}_z) = -0.234\mathbf{a}_x + 0.1404\mathbf{a}_z$$

$$\mathbf{H} = H_y \mathbf{a}_y + H_z \mathbf{a}_z$$

$$= 0.2753 \mathbf{a}_x + 0.382 \mathbf{a}_y + 0.1404 \mathbf{a}_z \text{ A/m}$$

Prob. 7.2

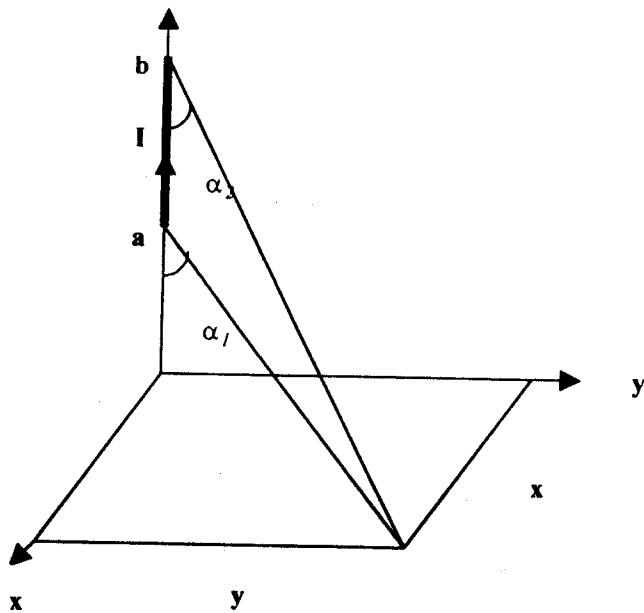


$$H = \frac{I}{4\pi\rho} (\cos\alpha_2 - \cos\alpha_1) \mathbf{a}_\phi$$

$$\rho = \sqrt{x^2 + y^2}, \cos\alpha_1 = \frac{a}{\sqrt{a^2 + \rho^2}}, \cos\alpha_2 = \frac{b}{\sqrt{b^2 + \rho^2}}$$

$\mathbf{a}_\rho = \mathbf{a}_x \times \mathbf{a}_y = \mathbf{a}_z \times \mathbf{a}_\rho$ i.e. \mathbf{a}_ρ is regular \mathbf{a}_ϕ . Hence,

$$H = \left[\frac{I}{4\pi\sqrt{x^2 + y^2 + b^2}} - \frac{a}{\sqrt{x^2 + y^2 + a^2}} \right] \mathbf{a}_\phi$$

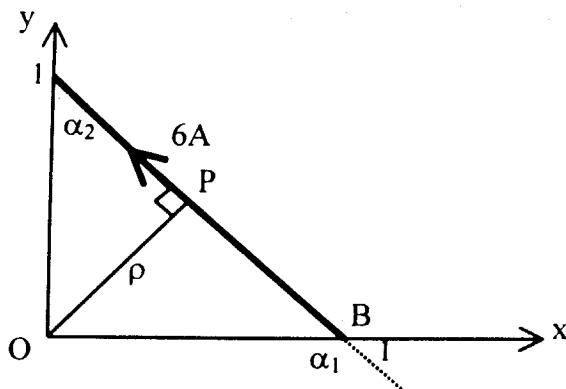Prob. 7.3


$$\bar{H} = \frac{I}{4\pi\rho} (\cos\alpha_2 - \cos\alpha_1) \bar{a}_\phi$$

$$\alpha_1 = 135^\circ, \alpha_2 = 45^\circ, \rho = \frac{1}{2}\sqrt{2} = \frac{\sqrt{2}}{2}$$

$$\bar{a}_p = \bar{a}_t \times \bar{a}_p = \left(\frac{-\bar{a}_x + \bar{a}_y}{\sqrt{2}} \right) \times \left(\frac{-\bar{a}_x - \bar{a}_y}{\sqrt{2}} \right) = \frac{1}{2} \begin{vmatrix} -1 & 1 & 0 \\ -1 & -1 & 0 \end{vmatrix} = \bar{a}_z$$


$$\bar{H} = \frac{6}{4\pi} \frac{\sqrt{2}}{2} (\cos 45^\circ - \cos 135^\circ) \bar{a}_z = \frac{3}{\pi} \bar{a}_z$$

$$\bar{H}(0,0,0) = \underline{\underline{0.954 \bar{a}_z \text{ A/m}}}$$

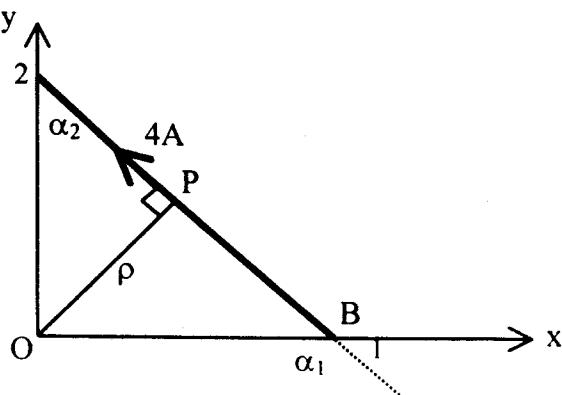Prob.7.4

(d) $H = 5.1a_x + 1.7a_y \text{ mA/m}^2$

Prob. 7.6

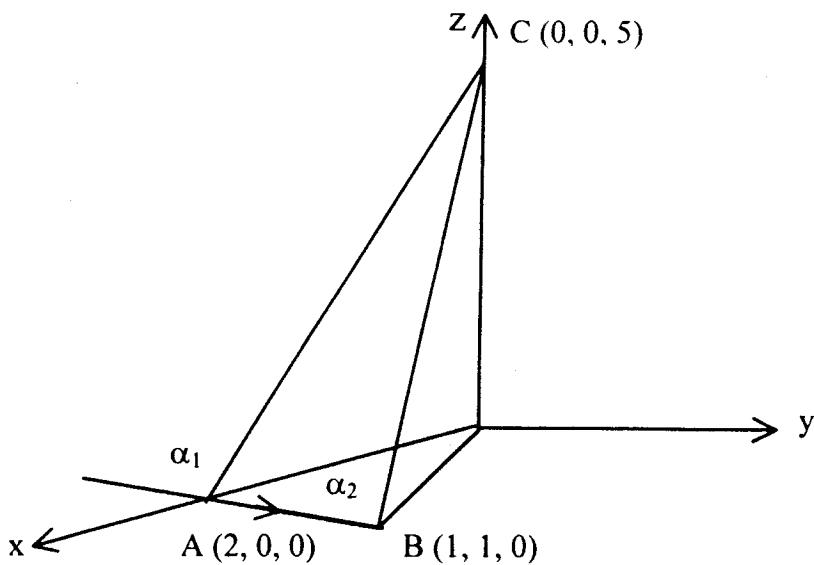

(a) Consider the figure above.

$$\mathbf{AB} = (1, 1, 0) - (2, 0, 0) = (-1, 1, 0)$$

$$\mathbf{AC} = (0, 0, 5) - (2, 0, 0) = (-2, 0, 5)$$

$\mathbf{AB} \cdot \mathbf{AC} = 2$, i.e AB and AC are not perpendicular.

$$\cos(180^\circ - \alpha_1) = \frac{\mathbf{AB} \cdot \mathbf{AC}}{|\mathbf{AB}| |\mathbf{AC}|} = \frac{2}{\sqrt{2} \sqrt{29}} \rightarrow \cos \alpha_1 = -\sqrt{\frac{2}{29}}$$

$$\mathbf{BC} = (0, 0, 5) - (-1, -1, 5) = (-1, -1, 5)$$

$$\mathbf{BA} = (1, -1, 0)$$

$$\cos \alpha_2 = \frac{\overline{\mathbf{BC}} \cdot \overline{\mathbf{BA}}}{|\overline{\mathbf{BC}}| |\overline{\mathbf{BA}}|} = \frac{-1+1}{|\overline{\mathbf{BC}}| |\overline{\mathbf{BA}}|} = 0$$

i.e. $\mathbf{BC} = \bar{\rho} = (-1, -1, 5), \rho = \sqrt{27}$

$$\bar{\mathbf{a}}_\phi = \bar{\mathbf{a}}_x \times \bar{\mathbf{a}}_\rho = \frac{(-1, 1, 0)}{\sqrt{2}} \times \frac{(-1, -1, 5)}{\sqrt{27}} = \frac{(5, 5, 2)}{\sqrt{54}}$$


$$\begin{aligned} \bar{\mathbf{H}}_2 &= \frac{10}{4\pi\sqrt{27}} \left(0 + \sqrt{\frac{2}{29}} \right) \frac{(5, 5, 2)}{\sqrt{27}} = \frac{5}{2\pi\sqrt{29}} \cdot \frac{(5, 5, 2)}{27} \text{ A/m} \\ &= 27.37 \bar{\mathbf{a}}_x + 27.37 \bar{\mathbf{a}}_y + 10.95 \bar{\mathbf{a}}_z \text{ mA/m} \end{aligned}$$

(b) $\bar{\mathbf{H}} = \bar{\mathbf{H}}_1 + \bar{\mathbf{H}}_2 + \bar{\mathbf{H}}_3 = (0, -59.1, 0) + (27.37, 27.37, 10.95)$
 $+ (-30.63, 30.63, 0)$
 $= -3.26 \bar{\mathbf{a}}_x - 1.1 \bar{\mathbf{a}}_y + 10.95 \bar{\mathbf{a}}_z \text{ mA/m}$

Prob. 7.7

(a) Let $\bar{H} = \bar{H}_x + \bar{H}_y = 2\bar{H}_x$

$$\bar{H}_x = \frac{I}{4\pi\rho} (\cos\alpha_2 - \cos\alpha_1) \bar{a}_\phi$$


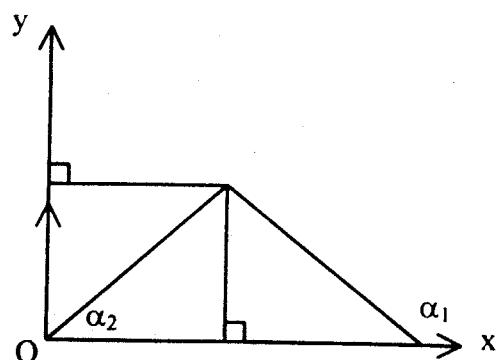


$$\bar{H}_3 = \frac{10}{4\pi\sqrt{20}} \left(-\frac{8}{\sqrt{84}} - 0 \right) \bar{a}_x \times \left(\frac{2\bar{a}_x - 8\bar{a}_y}{\sqrt{20}} \right) = \frac{\bar{a}_y + 2\bar{a}_z}{\pi\sqrt{21}}$$

$$\bar{H}_4 = \frac{10}{4\pi\sqrt{2}} \left(0 + \frac{4}{\sqrt{20}} \right) (-\bar{a}_y \times \bar{a}_z) = \frac{-5\bar{a}_x}{\pi\sqrt{20}}$$

$$\begin{aligned}\bar{H} &= \left(\frac{1}{34\pi\sqrt{21}} - \frac{5}{\pi\sqrt{20}} \right) \bar{a}_x + \left(\frac{1}{\pi\sqrt{21}} - \frac{10}{\pi\sqrt{68}} \right) \bar{a}_y + \left(\frac{20}{34\pi\sqrt{21}} - \frac{2}{\pi\sqrt{21}} \right) \bar{a}_z \\ &= \underline{-0.3457 \bar{a}_x - 0.3165 \bar{a}_y + 0.1798 \bar{a}_z \text{ A/m}}\end{aligned}$$

Prob. 7.10

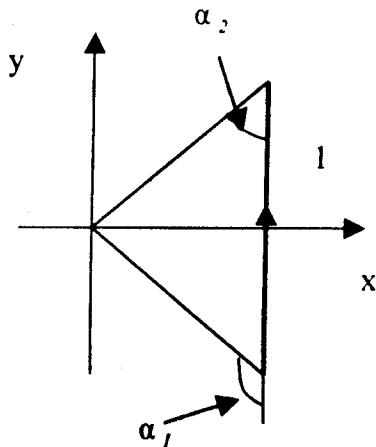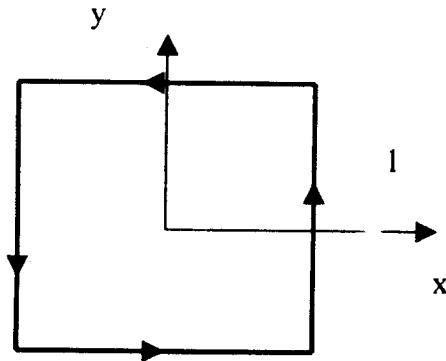

$H = 4H_1$, where H_1 is due to side 1.

$$H_1 = \frac{I}{4\pi\rho} (\cos\alpha_2 - \cos\alpha_1) a_z$$

$$\rho = a, \quad \alpha_2 = 45^\circ, \quad \alpha_1 = 135^\circ, \quad a_z = a_y x - a_x = a_z$$

$$H_1 = \frac{I}{4\pi\rho} \left(\frac{I}{\sqrt{2}} + \frac{I}{\sqrt{2}} \right) a_z = \frac{2I}{4\pi a \sqrt{2}} a_z$$

Prob. 7.14


$$\bar{B} = \mu_0 \bar{H} = \frac{\mu_0 NI}{L}$$

$$N = \frac{Bl}{\mu \cdot I} = \frac{5 \times 10^{-3} \times 3 \times 10^{-2}}{4\pi \times 10^{-7} \times 400 \times 10^{-3}} = 29.84$$

$N \approx 30$ turns.

Prob. 7.15

(a)

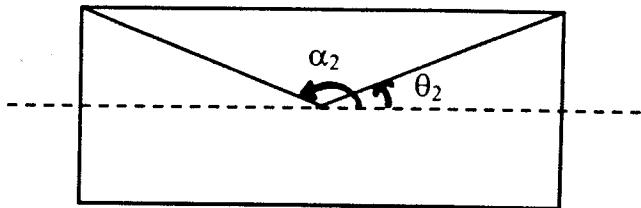


$$|\bar{H}| = \frac{nl}{2} (\cos \theta_2 - \cos \theta_1)$$

$$\cos \theta_2 = -\cos \theta_1 = \frac{1/2}{(a^2 + l^2/4)^{1/2}}$$


$$|\bar{H}| = \frac{l nl}{2(a^2 + l^2/4)^{1/2}} = \frac{0.5 \times 150 \times 2 \times 10^{-2}}{2 \times 10^{-3} \times \sqrt{4^2 + 10^2}} = \underline{\underline{69.63 \text{ A/m}}}$$

(b)

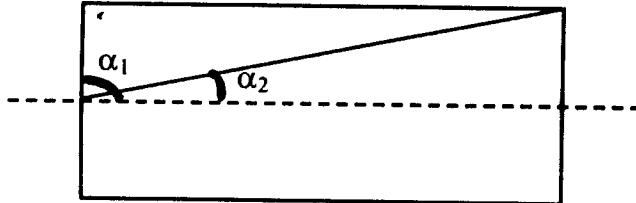

$$\alpha_1 = 90^\circ, \tan \theta_2 = \frac{a}{b} = \frac{4}{20} = 0.2 \rightarrow \theta_2 = 11.31^\circ$$

$$|\bar{H}| = \frac{nl}{2} \cos \theta_2 = \frac{150 \times 0.5}{2} \cos 11.31^\circ = \underline{\underline{36.77 \text{ A/m.}}}$$

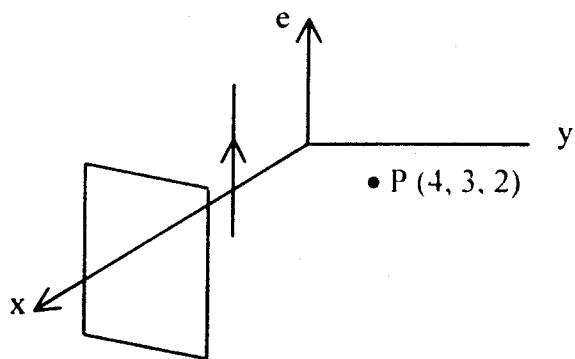Prob. 7.16

Let $\bar{H} = \bar{H}_l + \bar{H}_p$

$$\bar{H}_l = \frac{1}{2\pi\rho} \bar{a}_\phi$$

$$\bar{\rho} = (4, 3, 2) - (1, -2, 2) = (1, 5, 0), \quad \rho = |\bar{\rho}| = \sqrt{2b}$$

$$\bar{a}_p = \frac{\bar{a}_x + 5\bar{a}_y}{\sqrt{2b}}, \quad \bar{a}_l = \bar{a}_z$$

$$\bar{a}_\phi = \bar{a}_l \times \bar{a}_p = \bar{a}_z \times \left(\frac{\bar{a}_x + 5\bar{a}_y}{\sqrt{2b}} \right) = \frac{\bar{a}_y - 5\bar{a}_x}{\sqrt{2b}}$$

$$\bar{H}_l = \frac{20\pi}{2\pi} \left(\frac{-5\bar{a}_x + \bar{a}_y}{2b} \right) = -1.923 \bar{a}_y + 0.3846 \bar{a}_y$$

$$\bar{H}_p = \frac{1}{2} \bar{k} \times \bar{a}_n = \frac{1}{2} (100 \times 10^{-3}) \bar{a}_z \times (\bar{a}_x) = -0.05 \bar{a}_y$$

$$\bar{H} = \bar{H}_l + \bar{H}_p = \underline{\underline{-1.923 \bar{a}_x - 0.3346 \bar{a}_y \text{ A/m}}}$$

(b) From Prob. 7.15,

$$H_\phi = \begin{cases} \frac{I\rho}{2\pi a^2}, & \rho < a \\ \frac{I}{2\pi\rho}, & \rho > a \end{cases}$$

At $(0, 1 \text{ cm}, 0)$,

$$H_\phi = \frac{3 \times 1 \times 10^{-2}}{2\pi \times 4 \times 10^{-4}} = \frac{300}{8\pi}$$

$$\bar{H} = \underline{\underline{11.94 \bar{a}_\phi \text{ A/m}}}$$

At $(0, 4 \text{ cm}, 0)$,

$$H_\phi = \frac{3}{2\pi \times 4 \times 10^{-2}} = \frac{300}{8\pi}$$

$$\bar{H} = \underline{\underline{11.94 \bar{a}_\phi \text{ A/m}}}$$

Prob. 7.19

$$(a) \bar{J} = \nabla \cdot \bar{H} = \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ y & -x & 0 \end{vmatrix}$$


$$\bar{J} = \underline{\underline{-2 \bar{a}_z \text{ A/m}^2}}$$

$$(b) \oint \bar{H} \cdot d\bar{l} = I_{\text{enc}}$$

$$I_{\text{enc}} = \int \bar{J} \cdot d\bar{s} = \int_{x=0}^3 \int_{y=-1}^4 (-2) dx dy = (-2)(3)(5) = -30 \text{ A}$$

$$\begin{aligned} \oint \bar{H} \cdot d\bar{l} &= \int_{-1}^1 y dy \Big|_{y=-1} + \int_{-1}^1 (-x) dy \Big|_{x=3} + \int_3^0 y dx \Big|_{y=4} \\ &\quad + \int_4^1 (-x) dy \Big|_{x=0} = (-1)(3) + (-3)(5) + (4)(-3) \\ &= -30 \text{ A} \end{aligned}$$

$$\text{Thus, } \oint \bar{H} \cdot d\bar{l} = I_{\text{enc}} = \underline{\underline{-30 \text{ A}}}$$

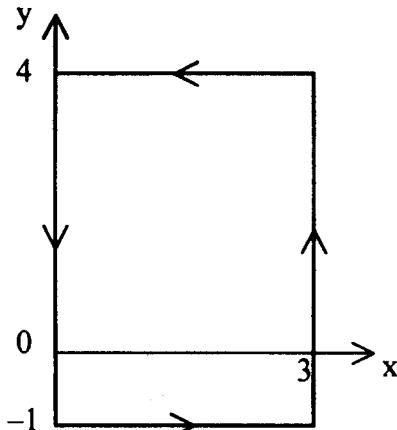

Prob. 7.20

$$(a) \quad \bar{J} = \nabla \times \bar{H} = \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ yz(x^2 + y^2) & -y^2 \times z & -4x^2 y^2 \\ (8x^2 y + xy^2) \bar{a}_x + [y(x^2 + y^2) - 4xy^2] \bar{a}_y & + [-y^2 z - z(x^2 + y^2)] \bar{a}_z \end{vmatrix}$$

$$= (8x^2 y + xy^2) \bar{a}_x + [y(x^2 + y^2) - 4xy^2] \bar{a}_y + [-y^2 z - z(x^2 + y^2)] \bar{a}_z$$

At $(5, 2, -3)$, $x = 5$, $y = 2$, $z = -3$

$$\bar{J} = 420 \bar{a}_z - 22 \bar{a}_y + 99 \bar{a}_z \text{ A/m}^2$$

$$(b) \quad I = \int J \cdot dS = \iint (8x^2 y + xy^2) dy dz \Big|_{x=-1} \\ = \int_0^2 dz \int_0^2 (8y - y^2) dy = 2 \left(4y^2 - \frac{y^3}{3} \right) \Big|_0^2 \\ = 4 \left(16 - \frac{8}{3} \right) = 53.33 \text{ A}$$

$$(c) \quad \bar{B} = \mu \bar{H}, \quad \nabla \cdot \bar{B} = 0 \rightarrow \bar{v} \cdot \bar{H} = 0$$

$$\nabla \cdot \bar{H} = \frac{\partial}{\partial x} H_x + \frac{\partial}{\partial y} H_y + \frac{\partial}{\partial z} H_z = 2xy - 2yxz = 0$$

$$\text{Hence } \underline{\underline{\nabla \cdot \bar{B} = 0}}$$

Prob. 7.21

$$(a) \quad \bar{B} = \frac{\mu_0 I}{2\pi \rho} \bar{a}_\phi, \quad \text{At } (-3, 4, 5), \rho = 5$$

$$\bar{B} = \frac{4\pi \times 10^{-7} \times 2}{2\pi(5)} \bar{a}_\phi = 80 \bar{a}_\phi \text{ nWb/m}^2$$

$$(b) \quad \phi = \int \bar{B} \cdot dS = \frac{\mu_0 I}{2\pi} \iint \frac{d\rho dz}{\rho} \\ = \frac{4\pi \times 10^{-7} \times 2}{2\pi} \ln \rho \Big|_2^6 z \Big|_0^4 = 16 \times 10^{-7} \ln 3 \\ = 1.756 \mu\text{Wb.}$$

Prob. 7.22

$$\psi = \int \bar{B} \cdot d\bar{s} = \mu_0 \int_{z=0}^{0.2} \int_{\phi=0}^{50^\circ} \frac{10^6}{\rho} \sin 2\phi \rho d\phi dz$$

$$\begin{aligned}\psi &= 4\pi \times 10^{-7} \times 10^6 (0.2) \left(-\frac{\cos 2\phi}{2} \right) \Big|_0^{50^\circ} \\ &= 0.04\pi (1 - \cos 100^\circ) \\ &= \underline{0.1475 \text{ Wb}}\end{aligned}$$

Prob. 7.23

Let $\bar{H} = \bar{H}_1 + \bar{H}_2$

where \bar{H}_1 and \bar{H}_2 are due to the wires centered at $x = 0$ and $x = 10\text{cm}$ respectively.

(a) For \bar{H}_1 , $\rho = 50\text{ cm}$, $\bar{a}_\phi = \bar{a}_z \times \bar{a}_\rho = \bar{a}_z \times \bar{a}_x = \bar{a}_y$

$$\bar{H}_1 = \frac{5}{2\pi(5 \times 10^{-2})} \bar{a}_y = \frac{50}{\pi} \bar{a}_y$$

$$\text{For } \bar{H}_2, \rho = 5\text{ cm}, \bar{a}_\phi = -\bar{a}_z \times -\bar{a}_x = \bar{a}_y, \bar{H}_2 = \bar{H}_1$$

$$\bar{H} = 2\bar{H}_1 = \frac{100}{\pi} \bar{a}_y$$

$$= 31.43 \bar{a}_y \text{ A/m}$$

(b) For \bar{H}_1 , $\bar{a}_\phi = \bar{a}_z \times \left(\frac{2\bar{a}_x + \bar{a}_y}{\sqrt{5}} \right) = \frac{2\bar{a}_y - \bar{a}_x}{\sqrt{5}}$

$$\bar{H}_1 = \frac{5}{2\pi 5 \sqrt{5} \times 10^{-2}} \left(\frac{-\bar{a}_x + 2\bar{a}_y}{\sqrt{5}} \right) = -3.183 \bar{a}_x + 6.366 \bar{a}_y$$

$$\text{For } \bar{H}_2, \bar{a}_\rho = -\bar{a}_z \times \bar{a}_y = \bar{a}_x$$

$$\bar{H}_2 = \frac{5}{2\pi(5)} \bar{a}_x = 15.924 \bar{a}_x$$

$$\bar{H} = \bar{H}_1 + \bar{H}_2$$

$$= 12.79 \bar{a}_x + 6.366 \bar{a}_y \text{ A/m}$$

$$(b) \quad \bar{v} \cdot \bar{B} = \frac{1}{\rho} \frac{\partial}{\partial \rho} (\rho B_\rho) = \frac{1}{\rho} \frac{\partial}{\partial \rho} (20) = 0$$

$$\bar{v} \times \bar{B} = 0$$

\bar{B} can be \bar{E} - field in a charge - free region.

$$(c) \quad \bar{v} \cdot \bar{C} = \frac{1}{r^2} 4r^3 \sin \theta \neq 0$$

$$\bar{v} \times \bar{C} = \frac{1}{r \sin \theta} \frac{\partial}{\partial r} (r^2 \sin^2 \theta) \neq 0$$

\bar{C} is neither or \bar{E} nor \bar{H} field.

Prob. 7.27

$$(a) \quad \nabla \cdot \bar{D} = 0$$

$$\nabla \times \bar{H} = \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ u^2 z & 2(x+1)yz & -(x+1)z^2 \\ 2(x+1)y \bar{a}_x & \dots & \neq 0 \end{vmatrix}$$

\bar{D} is a magnetostatic field.

$$(b) \quad \nabla \cdot \bar{E} = 0$$

$$\nabla \times \bar{E} = \frac{1}{\rho^2} \cos \theta \bar{a}_\rho + \dots \neq 0$$

\bar{E} can be a magnetostatic field.

$$(c) \quad \nabla \cdot \bar{F} = 0$$

$$\nabla \times \bar{F} = \frac{1}{r} \left[\frac{\partial}{\partial r} (r^{-1} \sin \theta) + \frac{2 \sin \theta}{r^2} \right] \bar{a}_\theta \neq 0$$

\bar{F} can be a magnetostatic field.

Prob. 7.28

$$(a) \quad \bar{B} = \bar{\nabla} \times \bar{A} = \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ 2x^2y + yz & xy^2 - xz^2 & -6xy + 2z^2y^2 \end{vmatrix}$$

$$\bar{B} = (-6xz + 4z^2y + 2xz^2) \bar{a}_x + (y + 4yz) \bar{a}_y + (y^2 - z^2 - 2x^2 - z) \bar{a}_z, \text{ Wb/m}^2$$

$$(b) \quad \psi = \int \bar{B} \cdot dS, \quad dS = dy dz dx$$

$$\begin{aligned}\psi &= \int_{z=0}^2 \int_{y=0}^2 (-6xz + 4zy - 2xy) dy dz \Big|_{x=1} \\ &= \int_0^2 \int_0^2 (-6z) dy dz + 4 \int_0^2 \int_0^2 z^2 y dy dz + 2 \int_0^2 \int_0^2 y dy dz \\ &= -8 \int_0^2 z dz \int_0^2 dy + 4 \int_0^2 z^2 dz \int_0^2 y dy \\ &= -8 \frac{z^2}{2} \Big|_0^2 + 4 \frac{z^3}{3} \Big|_0^2 \left(\frac{y^2}{2} \Big|_0^2 \right) = -32 + \frac{64}{3}\end{aligned}$$

$$\psi = -10.67 \text{ Wb}$$

\bar{E} can be a magnetostatic field.

$$(c) \quad \nabla \cdot \bar{A} = \partial A_x / \partial x + \partial A_y / \partial y + \partial A_z / \partial z = 4xy + 2xy - 6xy = 0$$

$$\nabla \cdot \bar{B} = -6z + 3z^3 + 1 + 6z - 3z^3 - 1 = 0$$

Prob. 7.29

$$\begin{aligned}\bar{B} &= \nabla \times \bar{A} = \frac{1}{\rho} \frac{\partial A_z}{\partial \phi} \bar{a}_\rho - \frac{\partial A_z}{\partial \rho} \bar{a}_\phi \\ &= \frac{15}{\rho} e^{-\rho} \cos \phi \bar{a}_\rho + 15 e^{-\rho} \sin \phi \bar{a}_\phi\end{aligned}$$

$$\bar{B} \left(3, \frac{\pi}{4}, -10 \right) = 5 e^{-3} \frac{1}{\sqrt{2}} \bar{a}_\rho + 15 e^{-3} \frac{1}{\sqrt{2}} \bar{a}_\phi$$

$$\bar{H} = \frac{\bar{B}}{\mu_0} = \frac{10^7}{4\pi} \frac{15}{\sqrt{2}} e^{-3} \left(\frac{1}{3} \bar{a}_\rho + \bar{a}_\phi \right)$$

$$\bar{H} = (14 \bar{a}_\rho + 42 \bar{a}_\phi) \cdot 10^4 \text{ A/m}$$

$$\psi = \int \bar{B} \cdot dS = \iint \frac{15}{\rho} e^{-\rho} \cos \phi \rho d\phi dz$$

$$= 15 z \Big|_0^{10} (-\sin \phi) \Big|_0^{\pi/2} e^{-5} = -150 e^{-5} \Rightarrow \psi = -1.011 \text{ Wb}$$

Prob. 7.30

Applying Ampere's law gives

$$H_\phi \cdot 2\pi\rho = \tau_o \cdot \pi\rho^2$$

$$H_\phi = \frac{\tau_o}{2} \rho$$


$$B_\phi = \mu_o H_\phi = \mu_o \frac{\tau_o \rho}{2}$$

$$\text{But } B_\phi = \nabla \times \bar{A} = -\frac{\partial A_z}{\partial \rho} \bar{a}_\phi + \dots$$

$$-\frac{\partial A_z}{\partial \rho} = \frac{1}{2} \mu \tau_o \rho$$

$$A_z = -\mu_o \frac{\tau_o \rho^2}{4}$$

$$\text{or } \bar{A} = \frac{1}{4} \mu_o \tau_o \rho^2 \bar{a}_z$$

**Prob. 7.31**

$$\bar{A} = \frac{I_o \mu_o}{4\pi a^2} (x^2 + y^2) \bar{a}_z = -\frac{I_o \mu_o \rho^2}{4\pi a^2} \bar{a}_z$$

$$\bar{B} = \nabla \times \bar{A} = \frac{I_o \mu_o \rho}{4\pi a^2} \bar{a}_\phi = \mu_o \bar{H}$$

$$\text{i.e. } \bar{H} = \frac{I_o \rho}{2\pi a^2} \bar{a}_\phi = \frac{I_o \sqrt{x^2 + y^2}}{2\pi a^2} \bar{a}_\phi$$

By Ampere's law, $\oint \bar{H} \cdot d\bar{l} = I_{\text{enc}}$

$$H_\phi \cdot 2\pi\rho = I_o \cdot \frac{\rho^2}{a^2}$$

or

$$\bar{H} = \frac{I_o \rho}{2\pi a^2} \bar{a}_\phi$$

Prob. 7.34

$$\bar{H} = -\nabla V_m \rightarrow V_m = - \int \bar{H} \cdot d\bar{l}$$

From Example 7.3, $\bar{H} = \frac{Ia^2}{2(z^2 + a^2)^{3/2}} \bar{a}_z$

$$V_m = -\frac{Ia^2}{2} \int_2 \frac{1}{(z^2 + a^2)^{3/2}} dz = \frac{-Ia^2}{2(z^2 + a^2)^{1/2}} + c$$

As $z \rightarrow \infty$, $V_m = 0$, i.e.

$$0 = -\frac{I}{2} + c \rightarrow c = \frac{I}{2}$$

Hence,

$$V_m = \frac{I}{2} \left[1 - \frac{z}{\sqrt{z^2 + a^2}} \right]$$

Prob. 7.35

For the outer conductor,

$$J_z = -\frac{I}{\pi(c^2 - b^2)} = -\frac{I}{\pi(16 - 9)a^2} = -\frac{I}{7\pi a^2}$$

Let $\bar{A} = A_z \bar{a}_z$. Using Poisson's equation,

$$\nabla^2 A_z = -\mu_o J_z$$

$$\frac{1}{\rho} \frac{\partial}{\partial \rho} \left(\rho \frac{\partial A_z}{\partial \rho} \right) = \frac{\mu_o I}{7a^2 \pi}$$

$$\text{or } \frac{\partial}{\partial \rho} \left(\rho \frac{\partial A_z}{\partial \rho} \right) = \frac{\mu_o I \rho}{7\pi a^2}$$

Integrating once,

$$\rho \frac{\partial A_z}{\partial \rho} = \frac{\mu_o I \rho^2}{14\pi a^2} + c_1$$

$$\text{or } \frac{\partial A_z}{\partial \rho} = \frac{\mu_o I \rho}{14\pi a^2} + \frac{c_1}{\rho}$$

Integrating again,

$$A_z = \frac{\mu_o I \rho^2}{28\pi a^2} + c_1 \ln \rho + c_2$$

But $A_z = 0$ when $\rho = 3a$.

$$0 = \frac{9}{28\pi} \mu_o I + c_1 \ln 3a + c_2$$

$$c_2 = -c_1 \ln 3a - \frac{9}{28\pi} \mu_o I$$

$$\text{i.e. } A_z = \frac{\mu_o I}{28\pi} \left(\frac{\rho^2}{a^2} - a \right) + c_1 \ln \frac{\rho}{3a}$$

$$\text{But } \nabla \times \bar{A} = \bar{B} = \mu_o \bar{H}$$

$$\nabla \times \bar{A} = \frac{\partial A_z}{\partial \rho} \bar{a}_\phi = - \left(\frac{\mu_o I \rho}{14\pi a^2} + \frac{c_1}{\rho} \right) \bar{a}_\phi$$

$$\text{At } \rho = 3a, \int \bar{H} \cdot d\bar{l} = I \rightarrow \omega_r(3a) H_\phi = 1$$

$$\text{or } H_\phi = \frac{1}{6\pi a}$$

Thus $\nabla \times \bar{A} \Big|_{\rho=3a} = \mu_o \bar{H} (\rho = 3a)$ implies that

$$-\left(\frac{3\mu_o I}{14\pi a} + \frac{c_1}{3a} \right) = \frac{\mu_o I}{6\pi a}$$

$$\text{or } c_1 = -\frac{I\mu_o}{2\pi} - \frac{9\mu_o I}{14\pi} = -\frac{16\mu_o I}{14\pi}$$

Thus,

$$A_z = \frac{\mu_o I}{28\pi} \left(\frac{\rho^2}{a^2} - a \right) - \underline{\underline{\frac{8\mu_o I}{7\pi} \ln \frac{\rho}{3a}}}$$

Prob. 7.36

$$\bar{H} = \frac{I}{2\pi\rho} \bar{a}_\phi$$

$$\text{But } \bar{H} = -\nabla V_m \quad (\bar{T} = 0)$$

$$\frac{I}{2\pi\rho} \bar{a}_\phi = -\frac{1}{\rho} \frac{\partial V_m}{\partial \phi} \bar{a}_\phi \rightarrow V_m = -\frac{I}{2\pi} \phi + C$$

$$\text{At } (10, 60^\circ, 7), \phi = 60^\circ = \frac{\pi}{3}, V_m = 0 \rightarrow 0 = -\frac{I}{2\pi} \cdot \frac{\pi}{3} + C$$

$$\text{or } C = \frac{I}{6}$$

$$V_m = -\frac{I}{2\pi} \phi + \frac{I}{6}$$

$$\text{At } (4, 30^\circ, -2), \phi = 30^\circ = \frac{\pi}{6},$$

$$V_m = -\frac{I}{2\pi} \cdot \frac{n}{6} + \frac{I}{6} = \frac{I}{12} = \frac{12}{12}$$

$$V_m = 1 \text{ A}$$

Prob. 7.37

For an infinite current sheet,

$$\bar{H} = \frac{1}{2} \bar{K} \times \bar{a}_n = \frac{1}{2} 50 \bar{a}_y \times \bar{a}_n = 25 \bar{a}_x$$

$$\text{But } \bar{H} = -\nabla V_m (\bar{J} = 0)$$

$$25 \bar{a}_x = -\frac{\partial V_m}{\partial x} \bar{a}_n \rightarrow V_m = -25x + c$$

$$\text{At the origin, } x = 0, V_m = 0, c = 0, \text{ i.e.}$$

$$V_m = -25x$$

$$(a) \text{ At } (-2, 0, 5), V_m = 50 \text{ A.}$$

$$(b) \text{ At } (10, 3, 1), V_m = -250 \text{ A.}$$

CHAPTER 8**P.E. 8.1**

$$(a) \quad F = m \frac{\partial \bar{u}}{\partial t} = Q \bar{E} = \underline{\underline{6a_z N}}$$

$$(b) \quad \frac{\partial \bar{u}}{\partial t} = 6\bar{a}_z = \frac{\partial}{\partial t}(u_x, u_y, u_z) \Rightarrow$$

$$\frac{\partial u_x}{\partial t} = 0 \rightarrow u_x = A$$

$$\frac{\partial u_y}{\partial t} = 0 \rightarrow u_y = B$$

$$\frac{\partial u_z}{\partial t} = 6 \rightarrow u_z = 6t + C$$

Since $\bar{u}(t=0) = 0$, $A = B = C = 0$

$$u_x = 0 = u_y, \quad u_z = 6t$$

$$u_x \frac{\partial x}{\partial t} = 0 \rightarrow x = A$$

$$u_y \frac{\partial y}{\partial t} = 0 \rightarrow y = B$$

$$u_z \frac{\partial z}{\partial t} = 6t \rightarrow z = 3t^2 + C_1$$

At $t = 0$, $(x, y, z) = (0, 0, 0)$ $\rightarrow A_1 = 0 = B_1 = C_1$

Hence, $(x, y, z) = (0, 0, 3t^2)$,

$u = 6ta_z$ at any time. At P(0, 0, 12), $z = 12 = 3t^2 \rightarrow t = 2s$

$$\underline{\underline{t = 2s}}$$

$$(c) \quad u = 6ta_z = 12a_z m/s.$$

$$a = \frac{\partial \bar{U}}{\partial t} = \underline{\underline{6a_z m/s^2}}$$

$$(d) \quad K.E = \frac{1}{2}m|\bar{U}|^2 = \frac{1}{2}(1)(144) = \underline{\underline{72J}}$$

P.E. 8.2

$$(a) \quad m\bar{a} = e\bar{u}\times\bar{B} = (eB_0uy, -eB_0ux, 0)$$

$$\frac{d^2x}{dt^2} = \frac{eB_0}{m} \frac{dy}{dt} = w \frac{dy}{dt} \quad (1)$$

$$\frac{d^2y}{dt^2} = -\frac{eBo}{m} \frac{dx}{dt} = -w \frac{dx}{dt} \quad (2)$$

$$\frac{d^2z}{dt^2} = 0; \Rightarrow \frac{dz}{dt} = C_1 \quad (3)$$

From (1) and (2),

$$\frac{d^3x}{dt^3} = w \frac{d^2y}{dt^2} = -w^2 \frac{dx}{dt}$$

$$(D^2 + w^2 D)x = 0 \rightarrow Dx = (0, \pm jw)x$$

$$x = c_2 + c_3 \cos wt + c_4 \sin wt$$

$$\frac{dy}{dt} = \frac{1}{w} \frac{d^2x}{dt^2} = -c_3 w \cos twt - c_4 w \sin wt$$

At $t = 0$, $\vec{u} = (\alpha, 0, \beta)$. Hence,

$$c_1 = \beta, c_3 = 0, c_4 = \frac{\alpha}{w}$$

$$\underline{\underline{\frac{dx}{dt} = \alpha \cos wt, \frac{dy}{dt} = -\alpha \sin wt, \frac{dz}{dt} = \beta}}$$

(b) Solving these yields

$$x = \frac{\alpha}{w} \sin wt, y = \frac{\alpha}{w} \cos wt, z = \beta t$$

$$(c) \quad x^2 + y^2 = \frac{\alpha^2}{w^2}, z = \beta t$$

showing that the particles move along a helix of radius $\frac{\alpha}{w}$ placed along the z-axis.

P.E. 8.3

(a) From Example 8.3, $QuB = QE$ regardless of the sign of the charge.

$$E = uB = 8 \times 10^6 \times 0.5 \times 10^{-3} = \underline{4 \text{ kV/m}}$$

(b) Yes, since $QuB = QE$ holds for any Q and m .

P.E. 8.4

By Newton's 3rd law, $\vec{F}_{12} = \vec{F}_{21}$, the force on the infinitely long wire is:

$$\vec{F}_l = -\vec{F} = \frac{\mu_0 I_1 I_2 b}{2\pi} \left(\frac{1}{\rho_o} - \frac{1}{\rho_o + a} \right) \vec{a}_\rho$$

$$= \frac{4\pi \times 10 - 7 \times 50 \times 3}{2\pi} \left(\frac{1}{2} - \frac{1}{3} \right) \bar{a}_\rho = \underline{\underline{5\bar{a}_\rho \mu N}}$$

P.E. 8.5

$$\begin{aligned}\vec{m} &= IS\vec{a}_n = 10 \times 10^{-4} \times 50 \frac{(2, 6, -3)}{7} \\ &= 7.143 \times 10^{-3} (2, 6, -3) \\ &= (\underline{1.429 \bar{a}_x} + \underline{4.286 \bar{a}_y} - \underline{2.143 \bar{a}_z}) \times 10^{-2} \text{ A-m}^2\end{aligned}$$

P.E. 8.6

$$(a) \quad \vec{T} = \vec{m} \times \vec{B} = \frac{10 \times 10^{-4} \times 50}{7 \times 10} \begin{vmatrix} 2 & 6 & -3 \\ 6 & 4 & 5 \end{vmatrix}$$

$$= \underline{0.03 \bar{a}_x} - \underline{0.02 \bar{a}_y} - \underline{0.02 \bar{a}_z} \text{ N-m}$$

$$\begin{aligned}(b) \quad |\vec{T}| &= ISB \sin \theta \rightarrow |\vec{T}|_{\max} = ISB \\ |\vec{T}|_{\max} &= \frac{50 \times 10^{-2}}{10} |6\bar{a}_x + 4\bar{a}_y + 5\bar{a}_z| = 0.4387 \\ \text{or } |\vec{T}|_{\max} &= |\vec{m} \times \vec{B}| = |-0.3055\bar{a}_x + 0.076\bar{a}_y + 0.3055\bar{a}_z| = \underline{0.4387} \text{ Nm}\end{aligned}$$

P.E. 8.7

$$(a) \quad \mu_r = \frac{\mu}{\mu_0} = 4.6, \chi_m = \mu_r - 1 = \underline{\underline{3.6}}$$

$$(b) \quad \vec{H} = \frac{\vec{B}}{\mu} = \frac{10 \times 10^{-3} e^{-y}}{4\pi \times 10^{-7} \times 4.6} \bar{a}_z \text{ A/m} = \underline{\underline{1730e^{-y} \bar{a}_z \text{ A/m}}}$$

$$(c) \quad M = \chi_m \vec{H} = \underline{\underline{6228e^{-y} \text{ A/m}}}$$

P.E. 8.8

$$\vec{a}_n = \frac{3\bar{a}_x + 4\bar{a}_y}{5}$$

$$\vec{B}_{1n} = (\vec{B}_1 \bullet \vec{a}_n) \vec{a}_n = \frac{(6+32)(6\bar{a}_x + 8\bar{a}_y)}{1000}$$

$$= 0.228 \bar{a}_x + 0.304 \bar{a}_y = B_{2n}$$

$$\vec{B}_{1t} = (\vec{B}_1 \bullet \vec{B}_{1n}) \vec{B}_{1n} = -0.128 \bar{a}_x + 0.096 \bar{a}_y + 0.2 \bar{a}_z$$

$$\vec{B}_{2t} = \frac{\mu_2}{\mu_1} \vec{B}_{1t} = 10 \vec{B}_{1t} = -1.28 \bar{a}_x + 0.96 \bar{a}_y + 2 \bar{a}_z$$

P.E. 8.11 From Example 8.11,

$$L_{in} = \frac{8I}{8\pi}$$

$$\begin{aligned} L_{ext} &= \frac{2w_m}{I^2} = \frac{1}{I^2} \iiint \frac{\mu l^2}{4\pi^2 \rho^2} \rho d\rho dd dz \\ &= \frac{1}{4\pi^2} \int_0^l dz \int_0^{2\pi} d\phi \int_a^b \frac{2\mu_o}{(1+\rho)\rho} d\rho \\ &= \frac{\mu_o l}{\pi} \cdot 2\pi \int_a^b \left[\frac{1}{\rho} - \frac{1}{(1+\rho)} \right] d\rho \\ &= \frac{\mu_o l}{\pi} \left[\ln \frac{b}{a} - \ln \frac{1+b}{1+a} \right] \\ L &= L_{in} + L_{ext} = \underline{\underline{\frac{\mu_o l}{8\pi}}} + \underline{\underline{\frac{\mu_o l}{\pi} \left[\ln \frac{b}{a} - \ln \frac{1+b}{1+a} \right]}} \end{aligned}$$

P.E. 8.12

$$(a) L'_{in} = \frac{\mu_o}{8\pi} = \frac{4\pi \times 10^{-7}}{8\pi} = \underline{0.05 \text{ } \mu\text{H/m}}$$

$$L'_{ext} = L' - L'_{in} = 1.2 - 0.05 = \underline{1.15 \text{ } \mu\text{H/m}}$$

$$\begin{aligned} (b) L' &= \frac{\mu_o}{2\pi} \left[\frac{1}{4} + \ln \frac{d-a}{a} \right] \\ \ln \frac{d-a}{a} &= \frac{2\pi l'}{\mu_o} - 0.25 = \frac{2\pi \times 1.2 \times 10^{-6}}{4\pi \times 10^{-7}} - 0.25 \\ &= 6 - 0.25 = 5.75 \end{aligned}$$

$$\frac{d-a}{a} = e^{5.75} = 314.19$$

$$d-a = 314.19a = 314.19 \times \frac{2.588 \times 10^{-3}}{2} = 406.6mm$$

$$d = 407.9mm = \underline{\underline{40.79cm}}$$

P.E. 8.13

This is similar to Example 8.13. In this case, however, $h=0$ so that

$$\vec{A}_1 = \frac{\mu_o I_1 a^2 b}{4b^3} \vec{a}_\phi$$

$$\phi_{12} = \frac{\mu_o I_1 a^2}{4b^2} \bullet 2\pi b = \frac{\mu_o \pi I_1 a^2}{2b}$$

$$m_{12} = \frac{\phi_{12}}{I_1} = \frac{\mu_o \pi a^2}{b} = \frac{4\pi \times 10^{-7} \times \pi \times 4}{2 \times 3} \\ = 2.632 \text{ } \mu\text{H}$$

P.E. 8.14

$$L_{\text{in}} = \frac{\mu_o}{8\pi} l = \frac{\mu_o 2\pi \rho_o}{8\pi} = \frac{4\pi \times 10^{-7} \times 10 \times 10^{-7}}{4} \\ = 31.42 \text{ nH}$$

P.E. 8.15

(a) From Example 7.6,

$$B_{\text{ave}} = \frac{\mu_o NI}{L} = \frac{\mu_o NI}{2\pi \rho_o} \\ \phi = B_{\text{ave}} \bullet S = \frac{\mu_o NI}{2\pi \rho_o} \bullet \pi a^2 \\ \text{or } I = \frac{2\rho_o \phi}{\mu a^2 N} = \frac{2 \times 10 \times 10^{-2} \times 0.5 \times 10^{-3}}{4\pi \times 10^{-7} \times 10^{-4} \times 10^3} \\ = 795.77 \text{ A}$$

Alternatively, using circuit approach

$$R = \frac{l}{\mu S} = \frac{2\pi \rho_o}{\mu_o S} = \frac{2\pi \rho_o}{\mu_o \pi a^2} \\ \Im = NI = \frac{\phi \Re}{N} = \frac{2\rho_o \phi}{\mu a^2 N}, \text{ as obtained before.}$$

$$\Re = \frac{2\rho_o}{\mu a^2} = \frac{2 \times 10 \times 10^{-2}}{4\pi \times 10^{-7} \times 10^{-4}} = 1.591 \times 10^9$$

$$\Im = \phi \Re = 0.5 \times 10^{-3} \times 1.591 \times 10^9 = 7.955 \times 10^5$$

$$I = \frac{\Im}{N} = 795 \text{ A as obtained before.}$$

(b) If $\mu = 500 \mu_o$,

$$I = \frac{795.77}{500} = 1.592 \text{ A}$$

P.E. 8.16

$$\Im = \frac{B^2 a S}{2\mu_o} = \frac{(1.5)^2 \times 10 \times 10^{-4}}{2 \times 4\pi \times 10^{-7}} = \frac{22500}{8\pi} = 895.25 \text{ N}$$

At $t = 0$,

$$x = 0 \rightarrow c_4 = 0$$

$$y = 0 \rightarrow c_5 = 5$$

$$z = 0 \rightarrow c_6 = 0$$

Hence,

$$(x, y, z) = (0, 5 - 5 \cos 2t, 5 \sin 2t)$$

At $t = 0$,

$$(x, y, z) = (0, 5 - 5 \cos 4, 5 \sin 4)$$

$$= (0, 8.268, -3.724)$$

$$\bar{u} = (0, 10 \sin 4, 10 \cos 4) = (0, -7.568, -6.536)$$

$$\begin{aligned} \text{K.E.} &= \frac{1}{2} m |\bar{u}|^2 = \frac{1}{2} (100 \sin^2 4 + 100 \cos^2 4) \\ &= \underline{\underline{50 \text{ J}}} \end{aligned}$$

Prob. 8.3

$$(a) F = m\ddot{a} = Q(\vec{E} + \vec{u} \times \vec{B})$$

$$\frac{d}{dt}(u_x, u_y, u_z) = 2 \left[-4\ddot{a}_y + \begin{bmatrix} u_x & u_y & u_z \\ 5 & 0 & 0 \end{bmatrix} \right] = -8\ddot{a}_y + 10u_z\ddot{a}_y - 10u_y\ddot{a}_z$$

$$\text{i.e. } \frac{du_x}{dt} = 0 \rightarrow u_x = A_1 \quad (1)$$

$$\frac{du_y}{dt} = -8 + 10u_z \quad (2)$$

$$\frac{du_z}{dt} = -10u_y \quad (3)$$

$$\frac{d^2u_y}{dt^2} = 0 + 10 \frac{du_z}{dt} = -100u_y$$

$$\ddot{u}_y + 100u_y = 0 \rightarrow u_y = B_1 \cos 10t + B_2 \sin 10t$$

From (2),

$$10u_z = 8 + \dot{u}_y = 8 - 10B_1 \sin 10t + 10B_2 \cos 10t$$

$$u_z = 0.8 - B_1 \sin 10t + B_2 \cos 10t$$

$$\text{At } t=0, \bar{u} = 0 \rightarrow A_1 = 0, B_1 = 0, B_2 = -0.8$$

At $t=0$, $u_x = u_0$, $u_y = 0 \rightarrow A = u_0$, $B=0$

Hence,

$$u_x = u_0 \cos wt = \frac{dx}{dt} \rightarrow x = -\frac{u_0}{w} \sin wt + c_1$$

$$u_y = -u_0 \sin wt = \frac{dy}{dt} \rightarrow y = -\frac{-u_0}{w} \cos wt + c_2$$

At $t=0$, $x = 0 = y \rightarrow c_1=0$, $c_2 = \frac{u_0}{w}$. Hence,

$$x = -\frac{u_0}{w} \sin wt, y = \frac{u_0}{w} (1 - \cos wt)$$

$$\frac{u^2_0}{w^2} (\cos^2 wt + \sin^2 wt) = \left(\frac{u_0}{w} \right)^2 = x^2 + (y - \frac{u_0}{w})^2$$

showing that the electron would move in a circle centered at $(0, \frac{u_0}{w})$. But since the field does not exist throughout the circular region, the electron passes through a semi-circle and leaves the field horizontally.

(b) $d = \text{twice the radius of the semi-circle}$

$$= \frac{2u_0}{w} = \frac{2u_0 m}{B_0 e}$$

Prob.8.6 $\bar{F} = \int I d\bar{l} \times \bar{R}$

$$= I \int_{x=1}^3 dx \bar{a}_x \times \bar{B} + I \int_{y=1}^3 dy \bar{a}_y \times \bar{B} + I \int_{z=3}^1 dx \bar{a}_x \times \bar{B} + I$$

$$+ I \int_{y=2}^0 dy \bar{a}_y \times \bar{B}$$

$$\bar{a}_x \times \bar{B} = \begin{vmatrix} 1 & 0 & 0 \\ 6x & -9x & 3z \end{vmatrix} = -3z\bar{a}_y - 9y\bar{a}_z$$

$$\bar{a}_y \times \bar{B} = \begin{vmatrix} 0 & 1 & 0 \\ 6x & -9x & 3z \end{vmatrix} = 3z\bar{a}_x - 6x\bar{a}_z$$

$$\bar{F} = I \int_{y=1}^3 dx (-3z\bar{a}_y - 9y\bar{a}_z)_{z=0} + I \int_{z=3}^1 dy (3z\bar{a}_x - 6x\bar{a}_z)_{x=0}$$

$$+ I \int_{y=2}^0 dx (-3z\bar{a}_y - 9y\bar{a}_z)_{z=0} + I \int_{x=1}^3 dy (3z\bar{a}_x - 6x\bar{a}_z)_{z=1}$$

$$= I (-18 - 18 + 36 + 6)\bar{a}_z = 6I\bar{a}_z$$

$$= 6 \times 5\bar{a}_z = \underline{\underline{30\bar{a}_z N}}$$

$$\vec{F}_3 = -3.28\vec{a}_x + 0.96\vec{a}_y \text{ mN/m}$$

(attractive due to L₂ and repulsive due to L₁)

Prob. 8.9

$$W = - \int \vec{F} \bullet d\vec{l}, \vec{F} = \int L d\vec{l} \times \vec{B} = 3(2\vec{a}_z) \times \cos \frac{d}{3} \vec{a}_\phi$$

$$= 6 \cos \frac{d}{3} \vec{a}_\phi \text{ mN}$$

$$W = - \int_0^{2\pi} 6 \cos \frac{d}{3} \rho_o dd = -6 \times 3 \sin \frac{d}{3} \Big|_0^{2\pi} \text{ mJ}$$

$$= -18 \sin \frac{2\pi}{3} = -15.59 \text{ mJ}$$

Prob. 8.10

$$(a) \quad \vec{F}_1 = \int_{\rho=2}^4 \frac{\mu_o I_1 I_2}{2\pi\rho} d\rho \vec{a}_\rho \times \vec{a}_\phi = \frac{4\pi \times 10^{-7}}{2\pi} (2)(5) \ln \frac{4}{2} \vec{a}_z$$

$$= 2 \ln 2 \vec{a}_z \mu N = 1.3863 \vec{a}_z \mu N$$

$$(b) \quad \vec{F}_2 = \int I_2 d\vec{l}_2 \times \vec{B}_1$$

$$= \frac{\mu_o I_1 I_2}{2\pi} \int \frac{1}{\rho} [d\rho \vec{a}_\rho + dz \vec{a}_z] \times \vec{a}_\phi$$

$$= \frac{\mu_o I_1 I_2}{2\pi} \int \frac{1}{\rho} [d\rho \vec{a}_z - dz \vec{a}_\rho]$$

But $\rho = z+2$, $dz = d\rho$

$$\vec{F}_2 = \frac{4\pi \times 10^{-7}}{2\pi} (5)(2) \int_{\rho=4}^2 \frac{1}{\rho} [d\rho \vec{a}_z - dz \vec{a}_\rho]$$

$$2 \ln \frac{4}{2} (\vec{a}_z - \vec{a}_\rho) \mu N = 1.386 \vec{a}_\rho - 1.386 \vec{a}_z \mu N$$

$$\vec{F}_3 = \frac{\mu_o I_1 I_2}{2\pi} \int \frac{1}{\rho} [d\rho \vec{a}_z - dz \vec{a}_\rho]$$

But $z = -\rho + 6$, $dz = -d\rho$

$$\vec{F}_3 = \frac{4\pi \times 10^{-7}}{2\pi} (5)(2) \int_{\rho=6}^4 \frac{1}{\rho} [d\rho \vec{a}_z - dz \vec{a}_\rho]$$

$$2 \ln \frac{4}{6} (\vec{a}_z + \vec{a}_\rho) \mu N = -0.8109 \vec{a}_\rho - 0.8109 \vec{a}_z \mu N$$

$$\vec{F} = \vec{F}_1 + \vec{F}_2 + \vec{F}_3$$

$$= 1.3863 \vec{a}_z + 1.386 \vec{a}_\rho - 1.3863 \vec{a}_z - 0.8109 \vec{a}_\rho - 0.8109 \vec{a}_z$$

$$= 0.5751 \vec{a}_\rho - 0.8109 \vec{a}_z \mu N$$

Let $\vec{B} = \vec{B}_1 + \vec{B}_2 + \vec{B}_3 + \vec{B}_4$

$$\text{where } \vec{B}_n = \frac{\mu_0 \mu_r I}{2\pi\rho} \vec{a}_\phi$$

For (1), $\vec{a}_\phi = \vec{a}_r \times \vec{a}_\rho \vec{a}_z \times (-\vec{a}_y) = \vec{a}_x$,

$$\vec{B}_1 = \frac{4\pi \times 10^{-7} \times 2000 \times 100}{2\pi \times 20 \times 10^{-3}} \vec{a}_x = 2\vec{a}_x$$

For (2), $\vec{\rho} = 6\vec{a}_x - 2\vec{a}_y$,

$$\vec{a}_\phi = -\vec{a}_z \times \frac{(6\vec{a}_x - 2\vec{a}_y)}{\sqrt{40}} = \frac{(-2\vec{a}_x - 6\vec{a}_y)}{\sqrt{40}}$$

$$\vec{B}_2 = \frac{4\pi \times 10^{-7} \times 2000 \times 100}{2\pi \times 400 \times 10^{-3}} (-2\vec{a}_x - 6\vec{a}_y)$$

$$= -0.2\vec{a}_x - 0.6\vec{a}_y$$

For (3), $\vec{\rho} = 6\vec{a}_x + 6\vec{a}_y$,

$$\vec{a}_\phi = \vec{a}_z \times \frac{(6\vec{a}_x + 6\vec{a}_y)}{\sqrt{72}} = \frac{(-6\vec{a}_x + 6\vec{a}_y)}{\sqrt{72}}$$

$$\vec{B}_3 = \frac{4\pi \times 10^{-7} \times 2000 \times 100}{2\pi \times 720 \times 10^{-3}} (-6\vec{a}_x + 6\vec{a}_y)$$

$$= -0.3333\vec{a}_x + 0.3333\vec{a}_y$$

For (4), $\vec{a}_\phi = -\vec{a}_z \times \vec{a}_y = \vec{a}_x$,

$$\vec{B}_4 = \frac{4\pi \times 10^{-7} \times 2000 \times 100}{2\pi \times 60 \times 10^{-3}} \vec{a}_x = 0.6667\vec{a}_x$$

$$\vec{B} = (2 + \frac{2}{3} - \frac{1}{5} - \frac{1}{3})\vec{a}_x + (-\frac{3}{5} + \frac{1}{3})\vec{a}_y$$

$$= 2.1333\vec{a}_x - 0.2667\vec{a}_y \text{ Wb/m}^2$$

Prob. 8.14

$$T = mB = NISB = 1000 \times 2 \times 10^{-3} \times 300 \times 10^{-6} \times 0.4$$

$$= 240 \mu\text{Nm}$$

Prob. 8.15

$$\vec{B} = \frac{k}{r^3} (2 \cos \theta \vec{a}_r + \sin \theta \vec{a}_\theta)$$

At (10, 0, 0), $r = 10$; $\theta = \frac{\pi}{2}$, $\vec{a}_r = \vec{a}_z$, $\vec{a}_\theta = -\vec{a}_z$

- Prob. 8.18**
- $\psi_m = \mu_r - 1 = \underline{\underline{3.5}}$
 - $\bar{H} = \frac{\bar{B}}{\mu} = \frac{4y \bar{a}_z \times 10^{-3}}{4\pi \times 10^{-7} \times 4.5} = \underline{\underline{707.3y \bar{a}_z A/m}}$
 - $\bar{M} = \psi_m \bar{H} = \underline{\underline{2.476y \bar{a}_z kA/m}}$
 - $$\bar{\tau}_b = \bar{V} \times \bar{M} = \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ 0 & 0 & M_z(y) \end{vmatrix} = \frac{dM_z}{dy} \bar{a}_x$$

$$= \underline{\underline{2.476 \bar{a}_x kA/m^2}}$$

Prob. 8.19

For case 1,

$$\mu = \frac{B_1}{H_1} = \frac{2}{1200}$$

$$\mu_r = \frac{\mu}{\mu_0} = \frac{1}{600} \times \frac{1}{4\pi \times 10^{-7}} = 1326.3$$

$$\psi_m = \mu_r - 1 = 1325.3$$

$$\bar{M}_1 = \psi_m H_1 = 1,590,366$$

For case 2,

$$\mu = \frac{B_2}{H_2} = \frac{1.4}{400}$$

$$\mu_r = \frac{\mu}{\mu_0} = \frac{1.4}{400} \times \frac{1}{4\pi \times 10^{-7}} = 2785.2$$

$$\psi_m = \mu_r - 1 = 2784.2$$

$$M = \psi_m H = 1,113,630$$

$$\Delta M = M_1 - M_2 = 476,680$$

$$= \underline{\underline{476.7 kA/m}}$$

Prob. 8.23 (a) $\bar{B}_{1n} = \bar{B}_{2n} = 1.5 \bar{a}_\phi$

$$\bar{H}_{1t} = \bar{H}_{2t} \rightarrow \frac{\bar{B}_{1t}}{\mu_1} = \frac{\bar{B}_{2t}}{\mu_2}$$

$$\bar{B}_{1t} = \frac{\mu_1}{\mu_2} \bar{B}_{2t} = \frac{5\mu_1}{2\mu_2} (10 \bar{a}_\rho - 20 \bar{a}_z) = 25 \bar{a}_\rho - 50 \bar{a}_z$$

Hence,

$$\bar{B}_{1t} = \underline{25 \bar{a}_\rho + 15 \bar{a}_\phi - 50 \bar{a}_z \text{ mWb/m}^2}$$

(b) $W_{m1} = \frac{1}{2} \bar{B}_1 \cdot \bar{H}_1 = \frac{B_1^2}{2\mu_1} = \frac{(25^2 + 15^2 + 50^2) \times 10^{-6}}{2 \times 2 \times 4\pi \times 10^{-7}}$

$$W_1 = \underline{666.5 \text{ J/m}^3}$$


$$W_2 = \frac{B_2^2}{2\mu_2} = \frac{(10^2 + 15^2 + 20^2) \times 10^{-6}}{2 \times 5 \times 4\pi \times 10^{-7}} = \underline{57.7 \text{ J/m}^3}$$

Prob. 8.24 (a) $W_{m1} = \frac{1}{2} \bar{B}_1 \cdot \bar{H}_1 = \frac{1}{2} \mu_0 \mu_r \bar{H}_1 \cdot \bar{H}_1, \mu_r = 1$

$$W_{m1} = \frac{1}{2} \times 4\pi \times 10^{-7} \times 1 (16 + 9 + 1)$$


$$= \underline{16.34 \mu\text{J/m}^3}$$

(b)

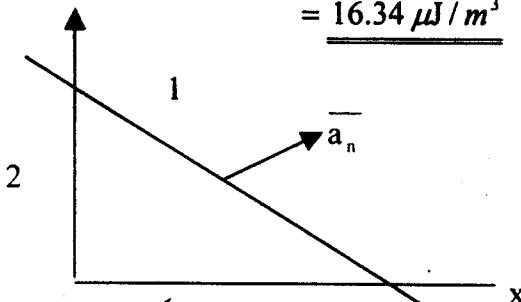

$$\cos\theta_2 = \frac{H_2 \cdot a_n}{H_2} = \frac{(-4.4 + 3.9) / \sqrt{5}}{\sqrt{4.588}} = -0.1044 \quad \longrightarrow \quad \underline{\theta_1 = 96^\circ}$$

Prob. 8.25

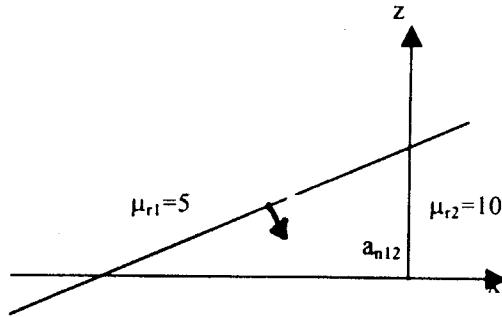

Let $\vec{H}_2 = (H_x, H_y, H_z)$

$$(\vec{H}_1 - \vec{H}_2) \times \vec{a}_{n12} = \vec{k}$$

where $f(x, z) = 5z - 4x = 0$ and

$$a_{n12} = -\frac{\nabla f}{|\nabla f|} = \frac{4\vec{a}_x - 5\vec{a}_z}{\sqrt{41}}$$

$$(\vec{H}_1 - \vec{H}_2) \times \vec{a}_{n12} = \frac{1}{\sqrt{41}} \begin{vmatrix} 25 - H_x & -30 - H_y & 45 - H_z \\ 4 & 0 & -5 \end{vmatrix}$$

$$= \frac{1}{\sqrt{41}} [150 + 5H_y, 180 - 4H_z, 120 + 4H_y] = \vec{k} = 35\vec{a}_y$$

Equating components,

$$\vec{a}_x : 150 + 5H_y = 0 \rightarrow H_y = -30$$

$$\vec{a}_y : 300 - 4H_z - 5H_x = 35 \rightarrow 4H_z + 5H_x = 270$$

$$\vec{a}_z : 120 + 4H_y = 0 \rightarrow H_y = -30$$

Also, $\vec{B}_{1n} = \vec{B}_{2n} \rightarrow \mu_1 \vec{H}_{1n} = \mu_2 \vec{H}_{2n}$

$$5\mu_o(2, -30, 45) \frac{(4, 0, 5)}{\sqrt{41}} = 10\mu_o(H_x, H_y, H_z) \frac{(4, 0, 5)}{\sqrt{41}}$$

$$100 - 225 = 68H_x - 10H_z$$

$$\begin{aligned} \text{or } 125 &= 10H_z - 8H_x \\ &= 10H_z - 8(54 - 0.8H_z) \quad \rightarrow \quad H_z = 33.96 \end{aligned}$$

$$\text{and } H_x = 54 - 0.8 H_z = 26.83$$

Thus,

$$\underline{\underline{\vec{H}_z = 26.83\vec{a}_x - 30\vec{a}_y + 33.96\vec{a}_z}} \text{ A/m}$$

Prob. 8.26

$$\vec{H}_{1n} = -3\vec{a}_z, \quad \vec{H}_{1t} = 10\vec{a}_x + 15\vec{a}_y$$

$$\vec{H}_{2t} = \vec{H}_{1t} = 10\vec{a}_x + 15\vec{a}_y$$

$$\vec{H}_{2n} = \frac{\mu_1}{\mu_2} \vec{H}_{1n} = \frac{1}{200} (-3\vec{a}_z) = -0.015\vec{a}_z$$

$$\vec{H}_2 = 10\vec{a}_x + 15\vec{a}_y - 0.015\vec{a}_z$$

$$\vec{B}_2 = \mu_2 \vec{H}_2 = 200 \times 4\pi \times 10^{-7} (10, 15, -0.015)$$

$$\underline{\underline{\vec{B}_2 = 2.51\vec{a}_x + 3.77\vec{a}_y - 0.0037\vec{a}_z}} \text{ mWb/m}^2$$

$$\tan \alpha = \frac{B_{2n}}{B_{2t}}$$

$$\text{or } \alpha = \tan^{-1} \frac{0.0037}{\sqrt{2.51^2 + 3.77^2}} = \underline{\underline{0.047^\circ}}$$

Prob. 8.27

$$(a) \quad \vec{H} = \frac{1}{2} \vec{k} \times \vec{a}_n = \frac{1}{2} (30 - 40) \vec{a}_x \times (-\vec{a}_r) = \underline{\underline{-5\vec{a}_y}} \text{ A/m}$$

$$\vec{B} = \mu_o \vec{H} = 4\pi \times 10^{-7} (-5\vec{a}_y) = \underline{\underline{-6.28\vec{a}_y}} \mu \text{ Wb/m}^2$$

$$(b) \quad \vec{H} = \frac{1}{2} (-30 - 40) \vec{a}_y = \underline{\underline{-35\vec{a}_y}} \text{ A/m}$$

$$\vec{B} = \mu_o \mu_r \vec{H} = 4\pi \times 10^{-7} (-35\vec{a}_y) = \underline{\underline{-110\vec{a}_y}} \mu \text{ Wb/m}^2$$

$$(c) \quad \vec{H} = \frac{1}{2}(-30 + 40)\vec{a}_y = 5\vec{a}_y$$

$$\vec{B} = \mu_0 \vec{H} = \underline{\underline{6.283}} \vec{a}_y \mu \text{ Wb/m}^2$$

$$\text{Prob. 8.28} \quad \mu_r = \psi_m + 1 = 20$$

$$W_m = \frac{1}{2} \vec{B}_1 \cdot \vec{H}_1 = \frac{1}{2} \mu \vec{H} \cdot \vec{H}$$

$$= \frac{1}{2} \mu (25x^4y^2z^2 + 100x^2y^4z^2 + 225x^2y^2z^4)$$

$$W_m = \int W_m dv$$

$$= \frac{1}{2} \mu \left[25 \int_0^2 x^4 dx \int_0^2 y^2 dy \int_1^2 z^2 dz + 100 \int_0^2 x^2 dx \int_0^2 y^4 dy \int_1^2 z^2 dz \right]$$

$$= + 225 \int_0^2 x^2 dx \int_0^2 y^2 dy \int_1^2 zdz \Big]$$

$$= \frac{25\mu}{2} \left[\frac{x^5}{5} \Big|_0^1 \frac{y^3}{3} \Big|_0^2 \frac{z^3}{3} \Big|_{-1}^2 + 4 \frac{x^3}{3} \Big|_0^1 \frac{y^5}{5} \Big|_0^2 \frac{z^3}{3} \Big|_{-1}^2 \right]$$

$$= + 9 \frac{x^3}{3} \Big|_0^1 \frac{y^3}{3} \Big|_0^2 \frac{z^5}{5} \Big|_{-1}^2 \Big]$$

$$= \frac{25\mu}{2} \left(\frac{1}{5} \cdot \frac{8}{3} \cdot \frac{9}{3} + \frac{4}{3} \cdot \frac{32}{3} \cdot \frac{9}{3} + \frac{9}{3} \cdot \frac{8}{3} \cdot \frac{33}{5} \right)$$

$$= \frac{25}{2} \times 4\pi \times 10^{-7} \times 20 \times \frac{3600}{45}$$

$$W_m = \underline{\underline{25.13 \text{ mJ}}}$$

Prob. 8.29

$$(a) \quad B = 70 + (210)^2 = 44.17 \text{ Wb/m}^2$$

$$\mu_r = \frac{B}{\mu_0 H} = \frac{44.17 \times 10^3}{4\pi \times 10^{-7} \times 210} = \underline{\underline{167.4}}$$

$$B_a = \frac{\Psi}{S} = \frac{16\pi \times 10^{-6}}{1.42 \times 4 \times 10^{-4}} = \underline{\underline{88.5 \text{ mWb/m}^2}}$$

Prob. 8.40

$$F = \frac{B_2 S}{2\mu_o} = \frac{\psi^2}{2\mu_o S} = \frac{4 \times 10^{-6}}{2 \times 4\pi \times 10^{-7} \times 0.3 \times 10^{-4}} = \underline{\underline{53.05 \text{ kN}}}$$


Prob. 8.41

(a) $F = NI = 200 \times 10^{-3} \times 750 = 150 \text{ A.t.}$

$$R_a = \frac{l_a}{\mu_o S} = \frac{10^{-3}}{25 \times 10^{-6} \mu_o} = 3.183 \times 10^7$$

$$R_t = \frac{l_t}{\mu_o \mu_r S} = \frac{2\pi \times 0.1}{\mu_o \times 300 \times 25 \times 10^{-6}} = 20 \times 10^7$$

$$\psi = \frac{\mathcal{I}}{R_a + R_t} = \frac{150}{10^7 (3.183 + 20)} = 20 \times 10^7$$

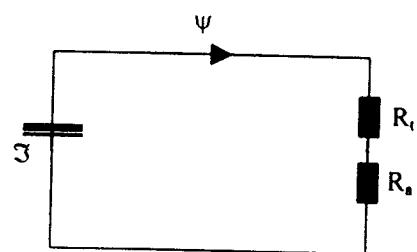


$$F = \frac{B^2 S}{2\mu_o} = \frac{\psi^2}{2\mu_o S} = \frac{41.861 \times 10^{-14}}{2 \times 4\pi \times 10^{-7} \times 25 \times 10^{-6}}$$

$$= \underline{\underline{6.66 \text{ mN}}}$$

(c) If $\mu_t \rightarrow \infty, R_t = 0, \psi = \frac{\mathcal{I}}{R_a} = \frac{150}{3.183 \times 10^7}$

$$F_2 = I_2 d l_2 \bullet B_1 = I_2 d l_2 \frac{\psi_1}{S} = \frac{2 \times 10^{-3} \times 5 \times 10^{-3} \times 150}{3.183 \times 10^7 \times 25 \times 10^{-6}}$$

$$F_2 = \underline{\underline{1.885 \text{ nN}}}$$

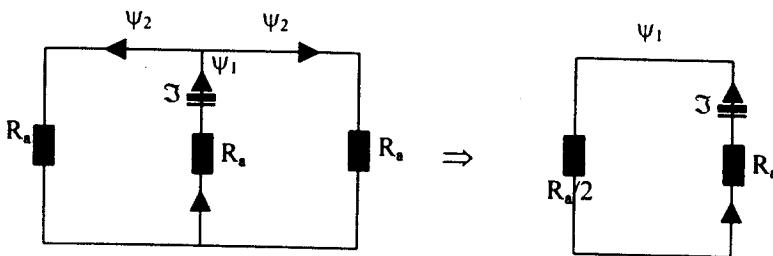Prob. 8.42

$$\psi_1 = 2\psi_2, \psi_1 = \frac{\mathcal{I}}{\frac{3}{2}R_a} = \frac{2\mathcal{I}}{3R_a} \rightarrow \psi_2 = \frac{\mathcal{I}}{3R_a}$$

$$\mathcal{I} = 2 \left(\frac{\psi_2^2}{2\mu_o S} \right) + \frac{\psi_1}{2\mu_o S} = \frac{3\psi_1^2}{\mu_o S} = \frac{3\mathcal{I}^2}{3R_a^2 \mu_o^2}$$

CHAPTER 9

P.E. 9.1

$$(a) \quad V_{emf} = \int (\bar{u} \times \bar{B}) \cdot d\bar{l} = uBl = 8(0.5)(0.1) = \underline{\underline{0.4}} \text{ V}$$

$$(b) \quad I = \frac{V_{emf}}{R} = \frac{0.4}{20} = \underline{\underline{20}} \text{ mA}$$

$$(c) \quad \bar{F}_m = Il \times \bar{B} = 0.2(0.1\bar{a}_y \times -0.5\bar{a}_z) = -\underline{\underline{\bar{a}_x}} \text{ mN}$$

$$(d) \quad P = FU = I^2 R = 8 \text{ mW}$$

$$\text{or} \quad P = \frac{V_{emf}}{R} = \frac{(0.4)^2}{20} = \underline{\underline{8}} \text{ mW}$$

P.E. 9.2

$$(a) \quad V_{emf} = \int (\bar{u} \times \bar{B}) \cdot d\bar{l}$$

where $\bar{B} = B_o \bar{a}_y = B_o (\sin \phi \bar{a}_o + \cos \phi \bar{a}_o)$, $B_o = 0.05$

$$(\bar{u} \times \bar{B}) \cdot d\bar{l} = -\rho w B_o \sin \phi dz = -0.2\pi \sin(wt + \pi/2) dz$$

$$V_{emf} = \int_0^{0.03} (\bar{u} \times \bar{B}) \cdot d\bar{l} = -6\pi \cos(100\pi t) \text{ mV}$$

At $t = 1\text{ms}$,

$$V_{emf} = -6\pi \cos 0.1\pi = \underline{\underline{-17.93}} \text{ mV}$$

$$i = \frac{V_{emf}}{R} = -60\pi \cos(100\pi t) \text{ mA}$$

$$\text{At } t = 3\text{ms}, \quad i = -60\pi \cos 0.3\pi = \underline{\underline{-0.1108}} \text{ A}$$

(b) Method 1:

$$\Psi = \int \bar{B} \cdot d\bar{l} = \int B_o t (\cos \phi \bar{a}_o - \sin \phi \bar{a}_\phi) \cdot d\rho dz \bar{a}_\phi = - \int_0^{\rho_o z_o} \int B_o t \sin \phi d\rho dz = -B_o \rho_o z_o t \sin \phi$$

$$\text{where } B_o = 0.02, \rho_o = 0.04, z_o = 0.03$$

$$\phi = wt + \pi/2$$

$$\Psi = -B_o \rho_o z_o t \cos wt$$

$$V_{emf} = -\frac{\partial \Psi}{\partial t} = B_o \rho_o z_o \cos wt - B_o \rho_o z_o t \sin wt$$

$$\begin{aligned}
 &= (0.02)(0.04)(0.03)[\cos wt - wt \sin wt] \\
 &= 24[\cos wt - wt \sin wt]\mu V
 \end{aligned}$$

Method 2:

$$\begin{aligned}
 V_{emf} &= - \int \frac{\partial \vec{B}}{\partial t} \cdot d\vec{s} + \int (\vec{u} \times \vec{B}) \cdot d\vec{l} \\
 \vec{B} &= B_o t \vec{a}_x = B_o t (\cos \phi \vec{a}_p - \sin \phi \vec{a}_p), \phi = wt + \frac{\pi}{2}
 \end{aligned}$$

$$\frac{\partial \vec{B}}{\partial t} = B_o (\cos \phi \vec{a}_p - \sin \phi \vec{a}_p)$$

Note that only explicit dependence of \vec{B} on time is accounted for, i.e. we make ϕ

= constant because it is transformer (stationary) emf. Thus,

$$\begin{aligned}
 V_{emf} &= -B_o \int_0^{\rho_o z_o} \int_0^0 (\cos \phi \vec{a}_p - \sin \phi \vec{a}_p) dp dz \vec{a}_\phi + \int_{z_o}^0 -\rho_o w B_o t \cos \phi dz \\
 &= B_o \rho_o z_o (\sin \phi + wt \cos \phi), \phi = wt + \frac{\pi}{2}
 \end{aligned}$$

= $B_o \rho_o z_o (\cos wt + wt \sin wt)$ as obtained earlier.

At $t = 1\text{ms}$,

$$\begin{aligned}
 V_{emf} &= 24[\cos 18^\circ - 100\pi \times 10^{-3} \sin 18^\circ] \mu V \\
 &= \underline{20.5 \mu V}
 \end{aligned}$$

At $t = 3\text{ms}$,

$$\begin{aligned}
 i &= 240[\cos 54^\circ - .03\pi \sin 54^\circ] \text{mA} \\
 &= \underline{-41.92 \text{mA}}
 \end{aligned}$$

P.E. 9.3

$$\begin{aligned}
 V_1 &= -N_1 \frac{d\psi}{dt}, V_2 = -N_2 \frac{d\psi}{dt} \\
 \frac{V_2}{V_1} &= \frac{N_2}{N_1} \rightarrow V_2 = \frac{N_2}{N_1} V_1 = \frac{300 \times 120}{500} = \underline{\underline{72V}}
 \end{aligned}$$

P.E. 9.4

- (a) $\vec{J}_a = \frac{\partial \vec{D}}{\partial t} = \underline{\underline{-20w\varepsilon_o \sin(wt - 50x)\vec{a}_z A/m^2}}$
- (b) $\nabla \times \vec{H} = \vec{J}_a \rightarrow -\frac{\partial \vec{H}_z}{\partial x} \vec{a}_y = -20w\varepsilon_o \sin(wt - 50x)\vec{a}_y$

$$\text{or } \vec{H} = \frac{20w\epsilon_0}{50} \cos(wt - 50x) \vec{a}_z \\ = \underline{0.4 w \epsilon_0 \cos(wt - 50x) \vec{a}_z} \text{ A/m}$$

$$(c) \quad \nabla \times \vec{E} = -\mu_0 \frac{\partial \vec{H}}{\partial t} \rightarrow -\frac{\partial \vec{E}_z}{\partial x} \vec{a}_z = 0.4 \mu_0 w \epsilon_0 \sin(wt - 50x) \vec{a}_z \\ 1000 = 0.4 \mu_0 \epsilon_0 w^2 = 0.4 \frac{u^2}{c_2} \\ \text{or } w = \underline{1.5 \times 10^{10} \text{ rad/s}}$$

P.E. 9.5

$$(a) \quad j^3 \left(\frac{1+j}{2-j} \right)^2 = -j \left[\frac{\sqrt{2} \angle 45^\circ}{\sqrt{5} \angle -26.56^\circ} \right]^2 = -j \left(\frac{\sqrt{2}}{\sqrt{5}} \angle 143.13^\circ \right) \\ = \underline{0.24 + j0.32}$$

$$(b) \quad 6 \angle 30^\circ + j5 - 3 + ej^{45^\circ} = 5.196 + j3 + j5 - 3 + 0.7071(1+j) \\ = \underline{2.903 + j8.707}$$

P.E. 9.6

$$\vec{P} = 2 \sin(10t + x - \pi/4) \vec{a}_y = 2 \cos(10t + x - \pi/4 - \pi/2) \vec{a}_y, w = 10$$

$$= R_e \left(2e^{j(x-\pi/4)} \vec{a}_y e^{jwt} \right) = R_e \left(\vec{P}_s e^{jwt} \right)$$

$$\text{i.e. } P_s = \underline{2e^{j(x-\pi/4)} \vec{a}_y}$$

$$\vec{Q} = R_e \left(\vec{Q}_s e^{jwt} \right) = R_e \left(e^{j(x+wt)} (\vec{a}_x - \vec{a}_z) \right) \sin \pi y$$

$$= \underline{\sin \pi y \cos(wt+x) (\vec{a}_x - \vec{a}_z)}$$

P.E. 9.7

$$-\mu \frac{\partial \vec{H}}{\partial t} = \nabla \times \vec{E} = \frac{1}{r \sin \theta} \frac{\partial}{\partial \theta} (E_\phi \sin \theta) \vec{a}_r - \frac{1}{r} \frac{\partial}{\partial r} (r E_\phi) \vec{a}_\theta \\ = \frac{2 \cos \theta}{r^2} \cos(wt - \beta r) \vec{a}_r - \frac{\beta}{r} \sin \theta \sin(wt - \beta r) \vec{a}_\theta$$

$$\vec{H} = \frac{2 \cos \theta}{wr^2} \sin(wt - \beta r) \vec{a}_r + \frac{\beta}{wr} \sin \theta \cos(wt - \beta r) \vec{a}_\theta$$

$$\beta = \frac{w}{c} = \frac{6 \times 10^7}{3 \times 10^8} = \underline{\underline{0.2 \text{ rad/m}}}$$

$$\vec{H} = \frac{10^{-7}}{3r^2} \cos \theta \sin(6 \times 10^7 - 0.2r) \vec{a}_r + \frac{10^{-8}}{3r} \sin \theta \cos(6 \times 10^7 - 0.2r) \vec{a}_\theta$$

P.E. 9.8

$$\omega = \frac{3}{\sqrt{\mu \epsilon}} = \frac{3c}{\sqrt{\mu_r \epsilon_r}} = \frac{9 \times 10^8}{\sqrt{10}} = \underline{\underline{2.846 \times 10^8 \text{ rad/s}}}$$

$$\begin{aligned}\vec{E} &= \frac{1}{\epsilon} \int \nabla \times \vec{H} dt = -\frac{6}{w\epsilon} \cos(wt - 3y) \vec{a}_x \\ &= \frac{-6}{\frac{9 \times 10^8}{\sqrt{10}} \cdot \frac{10^{-9}}{36}} \cos(wt - 3y) \vec{a}_x \\ &\underline{\underline{= -476.8 \cos(2.846 \times 10^8 t - 3y) \vec{a}_x \text{ V/m}}}\end{aligned}$$

Prob. 9.1

$$V = -\frac{\partial \psi}{\partial t} = -\frac{\partial}{\partial t} \int \vec{B} \bullet dS = -\frac{\partial \vec{B}}{\partial t} \bullet S$$

$$= 3770 \sin 377t \times \pi (0.2)^2 \times 10^{-3}$$

$$\underline{\underline{= 0.4738 \sin 377t \text{ V}}}$$

$$\text{Prob. 9.2} \quad V_{emf} = \int (\vec{u} \times \vec{B}) \cdot d\vec{l}, \quad d\vec{l} = d\rho \vec{a}_\rho, \quad u = \rho \frac{d\phi}{dt} = \rho w \vec{a}_\phi$$

$$\vec{u} \times \vec{B} = \rho w \vec{a}_\phi \times B_o \vec{a}_z = B_o \rho w \vec{a}_\rho$$

$$V_{emf} = \int_{\rho=0} B_o \rho w \vec{a}_\rho \cdot d\rho \vec{a}_\rho = B_o w \left. \frac{\rho^2}{2} \right|_0^l = \frac{1}{2} B_o w l^2$$

$$\underline{\underline{V_{emf} = \frac{1}{2} B_o w l^2}}$$

Prob. 9.3

$$V_{emf} = -\frac{\partial \lambda}{\partial t} = -W \frac{\partial}{\partial t} \int \vec{B} \bullet dS = -NBS \frac{d\phi}{dt}$$

$$= -NBSW = -50 \times 0.06 \times 0.3 \times 0.4 = -54 \text{ V}$$

Prob. 9.7 This is similar to Prob. 9.6. Assume loop is of width z.

$$\psi = \frac{\mu_o I z}{2\pi} \ln \frac{\rho + a}{\rho}$$

$$V_{emf} = -\frac{\partial \psi}{\partial t} = -\frac{\partial \psi}{\partial z} \bullet \frac{\partial z}{\partial t} = -\frac{\mu_o I}{2\pi} \ln \frac{\rho + a}{\rho} \bullet u$$

$$= -\frac{4\pi \times 10^{-7}}{2\pi} \times 15 \times 3 \ln \frac{60}{20} = -9.888 \mu V$$

Thus the induced emf = 9.888μV, point A at higher potential.

Prob. 9.8

$$V_{emf} = - \int \frac{\partial \vec{B}}{\partial t} \bullet dS + \int (\vec{u} \times \vec{B}) \bullet d\vec{l}$$

where $\vec{B} = B_o \cos wt \vec{a}_x, \vec{u} = u_o \cos wt \vec{a}_y, d\vec{l} = dz \vec{a}_z$

$$V_{emf} = \int_{z=0}^l \int_{y=-a}^y B_o w \sin wt dy dz - \int_0^l B_o u_o \cos^2 wt dz$$

$$= B_o w l (y+a) \sin wt - B_o u_o l \cos^2 wt$$

Alternatively,

$$\psi = \int \vec{B} \bullet d\vec{s} = \int_{z=0}^l \int_{y=-a}^y B_o \cos wt \vec{a}_x \bullet dy dz \vec{a}_x = B_o (y+a) l \cos wt$$

$$V_{emf} = -\frac{\partial \psi}{\partial t} = B_o (y+a) l w \sin wt - B_o \frac{dy}{dt} l \cos wt$$

$$\text{But } \frac{dy}{dt} = u = u_o \cos wt \rightarrow y = \frac{u_o}{w} \sin wt$$



$$V_{emf} = B_o w l (y+a) \sin wt - B_o u_o l \cos^2 wt$$

$$= B_o u_o l \sin^2 wt + B_o w a \sin wt - B_o u_o l \cos^2 wt$$


$$= -B_o u_o l \cos 2wt + B_o w a \sin wt$$

$$= 6 \times 10^{-3} \times 5 [10 \times 10 \sin 10t - 2 \cos 20t]$$

$$V_{emf} = \underline{3 \sin 10t - 0.06 \cos 20t \text{ V}}$$

Prob. 9.9

$$\begin{aligned}
 V_{\text{emf}} &= \int (\bar{u} \times \bar{B}) \cdot d\vec{l} = uBl \cos\theta \\
 &= \left(\frac{120 \times 10^3}{3600} \text{ mls} \right) (4.3 \times 10^{-5}) (1.6) \cos 65^\circ \\
 &= 2.293 \cos 65^\circ = \underline{0.97} \text{ mV}
 \end{aligned}$$

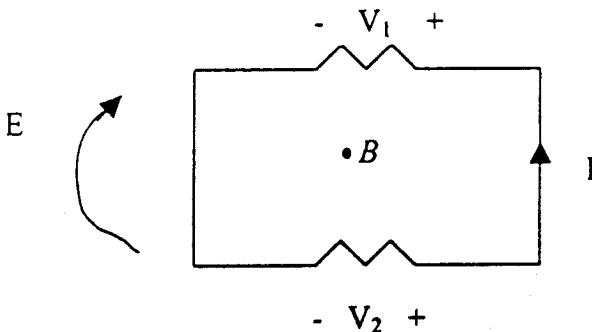Prob. 9.10

$$\begin{aligned}
 \oint \bar{E} \cdot d\bar{l} &= -\frac{d}{dt} \int \bar{B} \cdot d\bar{S} \\
 &= I(R_1 + R_2) \\
 \frac{dB}{dt} \cdot S &= I(R_1 + R_2) \quad (1)
 \end{aligned}$$

$$\text{Also, } \oint \bar{E} \cdot d\bar{l} = V_1 - V_2 = -\frac{dB}{dt} \cdot S \quad (2)$$

$$\text{Hence, } V_1 = IR_1 = -\frac{SR_1}{R_1 + R_2} \frac{dB}{dt}$$

$$V_2 = -IR_2 = \frac{SR_2}{R_1 + R_2} \frac{dB}{dt}$$

$$V_1 = \frac{10 \times 10^{-4} \times 10}{15} \times 0.2 \times 150\pi \sin 150\pi t = \underline{0.0628 \sin 150\pi t}$$

$$V_2 = \frac{-10 \times 10^{-4} \times 5}{15} \times 0.2 \times 150\pi \sin 150\pi t = \underline{-0.0314 \sin 150\pi t}$$

Prob. 9.11

$$d\psi = 0.63 - 0.45 = 0.18, dt = 0.02$$

$$V_{emf} = N \frac{d\psi}{dt} = 10 \left(\frac{0.18}{0.02} \right) = 90V$$

$$I = \frac{V_{emf}}{R} = \left(\frac{90}{15} \right) = 6 A$$

Using Lenz's law, the direction of the induced current is councclockwise.

Prob. 9.12

$$V = \int (\vec{u} \times \vec{B}) \cdot d\vec{l}, \text{ where } \vec{u} = \rho \omega \vec{a}_\theta, \vec{B} = B_o \vec{a}_z$$

$$V = \int_{\rho_1}^{\rho_2} \rho \omega B_o d\rho = \frac{\omega B_o}{2} (\rho_2^2 - \rho_1^2)$$

$$V = \frac{60 \times 5}{2} \cdot 10^{-3} (100 - 4) \cdot 10^{-4} = \underline{\underline{4.32}} \text{ mV}$$

Prob. 9.13

$$J_{ds} = j \omega D_s \rightarrow |J_{ds}|_{max} = \omega \epsilon E_s = \omega \epsilon \frac{V_s}{d}$$

$$= \frac{10^{-9}}{36\pi} \times \frac{2\pi \times 20 \times 10^6 \times 50}{0.2 \times 10^{-3}}$$

$$= \underline{\underline{277.8}} \text{ A/m}^2$$

$$I_{ds} = J_{ds} \cdot S = \frac{1000}{3.6} \times 2.8 \times 10^{-4} = \underline{\underline{77.78}} \text{ mA}$$

Prob. 9.14

$$\frac{J_c}{J_d} = \frac{\sigma E}{\omega \epsilon E} = \frac{\sigma}{\omega \epsilon}$$

$$(a) \frac{\sigma}{\omega \epsilon} = \frac{2 \times 10^{-3}}{2\pi \times 10^9 \times 81 \times \frac{10^{-9}}{36\pi}} = \underline{\underline{0.444 \times 10^{-3}}}$$

$$(b) \frac{\sigma}{\omega \epsilon} = \frac{25}{2\pi \times 10^9 \times 81 \times \frac{10^{-9}}{36\pi}} = \underline{\underline{5.555}}$$

$$(c) \frac{\sigma}{\omega \epsilon} = \frac{2 \times 10^{-4}}{2\pi \times 10^9 \times 5 \times \frac{10^{-9}}{36\pi}} = \underline{\underline{7.2 \times 10^{-4}}}$$

Prob. 9.15 $\frac{J}{J_d} = \frac{\sigma E}{\omega \epsilon E} = \frac{\sigma}{\omega \epsilon} = 10$

$$\omega = \frac{\sigma}{10\epsilon} = 2\pi f \quad \longrightarrow \quad f = \frac{\sigma}{20\pi\epsilon} = \frac{20}{20\pi \times \frac{10^{-9}}{36\pi}}$$

$$f = \underline{\underline{36 \text{ GHz}}}$$

Prob. 9.16

$$J_c = \frac{I_c}{S} = \sigma E \rightarrow E = \frac{I_c}{\sigma S}$$

$$J_a = j\omega \epsilon E \rightarrow |J_a| = \omega \epsilon E = \frac{\omega \epsilon I_s}{\sigma S}$$

$$|J_d| = \frac{10^9 \times 4.6 \times 10^{-9}}{36\pi} \times \frac{0.2 \times 10^{-3}}{25 \times 10^6 \times 10 \times 10^{-4}} A/m = \underline{\underline{3.254 \text{ nA/m}^2}}$$

Prob. 9.17

$$(a) \nabla \bullet \vec{E}_s = \rho_s / \epsilon, \nabla \bullet \vec{H}_s = 0$$

$$\nabla \times \vec{E}_s = j\omega \mu \vec{H}_s, \nabla \times \vec{H}_s = (\sigma - j\omega \epsilon) \vec{E}_s$$

$$(b) \nabla \bullet \vec{D} = \rho_v \rightarrow \frac{\partial D_x}{\partial x} + \frac{\partial D_y}{\partial y} + \frac{\partial D_z}{\partial z} = \rho_v \quad (1)$$

$$\nabla \bullet \vec{B} = 0 \rightarrow \frac{\partial B_x}{\partial x} + \frac{\partial B_y}{\partial y} + \frac{\partial B_z}{\partial z} = 0 \quad (2)$$

$$\nabla \times \vec{E} = -\frac{\partial \vec{B}}{\partial t} \rightarrow \frac{\partial E_z}{\partial y} - \frac{\partial E_y}{\partial z} = -\frac{\partial B_x}{\partial t} \quad (3)$$

$$\frac{\partial E_x}{\partial z} - \frac{\partial E_z}{\partial x} = -\frac{\partial B_y}{\partial t} \quad (4)$$

$$\frac{\partial E_y}{\partial x} - \frac{\partial E_x}{\partial y} = -\frac{\partial B_z}{\partial t} \quad (5)$$

$$\nabla \times \vec{H} = \vec{J} + \frac{\partial \vec{D}}{\partial t} \rightarrow \frac{\partial H_z}{\partial y} - \frac{\partial H_y}{\partial z} = J_x + \frac{\partial D_x}{\partial t} \quad (6)$$

$$\frac{\partial H_x}{\partial z} - \frac{\partial H_z}{\partial x} = J_y + \frac{\partial D_y}{\partial t} \quad (7)$$

$$\frac{\partial H_y}{\partial x} - \frac{\partial H_x}{\partial y} = J_z + \frac{\partial D_z}{\partial t} \quad (8)$$

Prob. 9.18

$$\text{If } \vec{J} = 0 = \rho_v, \text{ then } \nabla \bullet \vec{B} = 0 \quad (1)$$

$$\nabla \bullet \vec{D} = \rho_v \quad (2)$$

$$\nabla \times \vec{E} = -\frac{\partial \vec{B}}{\partial t} \quad (3)$$

$$\nabla \times \vec{H} = \vec{J} + \frac{\partial \vec{D}}{\partial t} \quad (4)$$

Since $\nabla \bullet \nabla \times \vec{A} = 0$ for any vector field \vec{A} ,

$$\nabla \bullet \nabla \times \vec{E} = -\frac{\partial}{\partial t} \nabla \bullet \vec{B} = 0$$

$$\nabla \bullet \nabla \times \vec{H} = -\frac{\partial}{\partial t} \nabla \bullet \vec{D} = 0$$

showing that (1) and (2) are incorporated in (3) and (4). Thus Maxwell's equations can be reduced to (3) and (4), i.e.

$$\nabla \times \vec{E} = -\frac{\partial \vec{B}}{\partial t}, \nabla \times \vec{H} = -\frac{\partial \vec{D}}{\partial t}$$

Prob. 9.19

$$-\frac{\partial \rho_v}{\partial t} = \nabla \bullet J = \nabla \bullet \sigma E = \sigma \nabla \bullet \frac{D}{\epsilon} = \frac{\sigma}{\epsilon} \rho_v$$

Hence,

$$\frac{\partial \rho_v}{\partial t} + \frac{\sigma}{\epsilon} \rho_v = 0$$

Prob. 9.20

$$\nabla_x E = -\frac{\partial B}{\partial t}$$

$$\nabla_x \nabla_x E = -\frac{\partial}{\partial t} \nabla_x B = -\mu \frac{\partial}{\partial t} \nabla_x H = -\mu \frac{\partial J}{\partial t}$$

But

$$\nabla_x \nabla_x E = \nabla(\nabla \bullet E) - \nabla^2 E$$

$$(d) \quad \nabla \cdot D = \frac{l}{r^2 \sin \theta} \sin(\omega t - 5r) \frac{\partial}{\partial \theta} (\sin^2 \theta) \neq 0$$

$$\nabla \times D = -\frac{\partial D_\theta}{\partial \phi} a_r + \frac{l}{r} \frac{\partial}{\partial r} (r D_\theta) a_\phi = \frac{l}{r} \sin \theta (-5) \sin(\omega t - 5r) a_\phi \neq 0$$

No, D is not an EM field.

Prob. 9.26 From Maxwell's equations,

$$\nabla \times \bar{E} = -\frac{\partial \bar{B}}{\partial t} \quad (1)$$

$$\nabla \times \bar{H} = \bar{J} + \frac{\partial \bar{D}}{\partial t} \quad (2)$$

Dotting both sides of (2) with \bar{E} gives:

$$\bar{E} \cdot (\nabla \times \bar{H}) = \bar{E} \cdot \bar{J} + \bar{E} \cdot \frac{\partial \bar{D}}{\partial t} \quad (3)$$

But for any arbitrary vectors \bar{A} and \bar{B} ,

$$\nabla \cdot (\bar{A} \times \bar{B}) = \bar{B} \cdot (\nabla \times \bar{A}) - \bar{A} \cdot (\nabla \times \bar{B})$$

Applying this on the left-hand side of (3) by letting $\bar{A} = \bar{B}$ and $\bar{B} = \bar{E}$, we get

$$\bar{H} \cdot (\nabla \times \bar{E}) + \nabla \cdot (\bar{H} \times \bar{E}) = \bar{E} \cdot \bar{J} + \frac{1}{2} \frac{\partial}{\partial t} (\bar{D} \cdot \bar{E}) \quad (4)$$

From (1),

$$\bar{H} \cdot (\nabla \times \bar{E}) = \bar{H} \cdot \left(-\frac{\partial \bar{B}}{\partial t} \right) = \frac{1}{2} \frac{\partial}{\partial t} (\bar{B} \cdot \bar{H})$$

Substituting this in (4) gives:

$$-\frac{1}{2} \frac{\partial}{\partial t} (\bar{B} \cdot \bar{H}) - \nabla \cdot (\bar{E} \times \bar{H}) = \bar{J} \cdot \bar{E} + \frac{1}{2} \frac{\partial}{\partial t} (\bar{D} \cdot \bar{E})$$

Rearranging terms and then taking the volume integral of both sides:

$$\int \nabla \cdot (\bar{E} \times \bar{H}) dV = -\frac{\partial}{\partial t} \frac{1}{2} \int (\bar{E} \cdot \bar{D} + \bar{H} \cdot \bar{B}) dV - \int \bar{J} \cdot \bar{E} dV$$

$$\oint (\bar{E} \times \bar{H}) \cdot dS = -\frac{\partial w}{\partial t} - \int \bar{J} \cdot \bar{E} dV$$

$$\text{or } \frac{\partial w}{\partial t} = -\oint (\bar{E} \times \bar{H}) \cdot dS - \int \bar{E} \cdot \bar{J} dV \text{ as required.}$$

Prob. 9.27 $\nabla \times H = J + J_d$

$J = \sigma E = 0$ in free space.

$$J_d = \nabla \times H = \left[\frac{1}{\rho} \frac{\partial H_z}{\partial \phi} - \frac{\partial H_\phi}{\partial z} \right] a_r + \left[\frac{\partial H_z}{\partial r} - \frac{\partial H_r}{\partial \phi} \right] a_\theta + \frac{1}{\rho} \left[\frac{\partial}{\partial \rho} (\rho H_\phi) - \frac{\partial H_\phi}{\partial \phi} \right] a_z$$

$$= 0 + \frac{I}{\rho} \left[\frac{\partial}{\partial \rho} (2\rho^2 \cos \phi) - \rho \cos \phi \right] \cos 4x10^6 t a_z = \frac{a_z}{\rho} (4 \cos \phi - \rho \cos \phi) \cos 4x10^6 t$$

$$J_d = \underline{3 \cos \phi \cos 4x10^6 t a_z}$$

$$J_d = \frac{\partial D}{\partial t} = \epsilon_0 \frac{\partial E}{\partial t} \quad \longrightarrow \quad E = \frac{I}{\epsilon_0} \int J_d dt$$

$$E = \frac{3}{\epsilon_0} \frac{\cos \phi}{4x10^6} \sin 4x10^6 t a_z = \frac{3}{4x10^6 x \frac{10^{-9}}{36\pi}} \cos \phi \sin 4x10^6 t a_z$$

$$E = \underline{84.82 \cos \phi \sin 4x10^6 t a_z \text{ kV/m}}$$

Prob. 9.28 Using Maxwell's equations,

$$\nabla \times H = \sigma E + \epsilon \frac{\partial E}{\partial t} \quad (\sigma = 0) \quad \longrightarrow \quad E = \frac{I}{\epsilon} \int \nabla \times H dt$$

But

$$\nabla \times H = - \frac{I}{r \sin \theta} \frac{\partial H_\theta}{\partial \phi} a_r + \frac{I}{r} \frac{\partial}{\partial r} (r H_\theta) a_\phi = \frac{12 \sin \theta}{r} \beta \sin(2\pi x 10^8 t - \beta r) a_\phi$$

$$E = \frac{12 \sin \theta}{\epsilon_0} \beta \int \sin(2\pi x 10^8 t - \beta r) dt a_\phi$$

$$= \underline{-\frac{12 \sin \theta}{\omega \epsilon_0 r} \beta \sin(\omega t - \beta r) a_\phi}, \quad \omega = 2\pi x 10^8$$

Prob. 9.29

$$\begin{aligned} \nabla \times \vec{E} &= \frac{1}{\rho} \frac{\partial}{\partial \rho} (\rho E_\phi) \vec{a}_z = \frac{1}{\rho} \frac{\partial}{\partial \rho} (\rho^2 + e^{-\rho-t}) \vec{a}_z \\ &= (2-\rho) t e^{-\rho-t} \vec{a}_z \end{aligned}$$

$$\frac{\partial \vec{B}}{\partial t} = \nabla \times \vec{E} \rightarrow \vec{B} = - \int \nabla \times \vec{E} dt = \int \frac{(\rho-2)t}{V} \frac{e^{-\rho-t} dt}{du} \vec{a}_z$$

Integrating by parts yields

$$\vec{B} = [-(\rho-2) t e^{-\rho-t} + \int (\rho-2) e^{-\rho-t} dt] \vec{a}_z$$

(d)

$$\frac{1.897 \angle -100^\circ}{(5.76 \angle 90^\circ)(9.43 \angle -122^\circ)} = \underline{\underline{0.0349 \angle -68^\circ}}$$

Prob. 9.32 (a) $\sin\theta = \cos(\theta - 90^\circ)$

$$E = 4 \cos(\omega t - 3x - 10^\circ) a_y - 5 \cos(\omega t + 3x - 70^\circ) a_z$$

$$= \operatorname{Re} [4e^{j(-3x-10^\circ)} e^{j\omega t} a_y - 5e^{j(3x-70^\circ)} e^{j\omega t} a_z] = \operatorname{Re}[E_s e^{j\omega t}]$$

$$E_s = \underline{\underline{4e^{-j(3x+10^\circ)} a_y - 5e^{j(3x-70^\circ)} a_z}}$$

$$(b) H = \operatorname{Re} \left[\frac{\sin\theta}{r} e^{j\omega t} e^{-jsr} a_\theta \right] = \operatorname{Re}[H_s e^{j\omega t}]$$

$$H_s = \underline{\underline{\frac{\sin\theta}{r} e^{-jsr} a_\theta}}$$

$$(c) J = \operatorname{Re} [6e^{-3x} e^{-j2x} e^{-j90^\circ} e^{j\omega t} a_y + \dots] = \operatorname{Re}[J_s e^{j\omega t}]$$

$$J_s = \underline{\underline{-j6e^{-(3+j2)x} a_y + 10e^{-(1+j5)x} a_z}}$$

Prob. 9.33 (a) $(4 - j3) = 5e^{-j36.87^\circ}$

$$A_s = 5e^{-j(\beta x + 36.37^\circ)} a_y$$

$$A = \operatorname{Re}[A_s e^{j\omega t}] = \underline{\underline{5 \cos(\omega t - \beta x - 36.37^\circ) a_y}}$$

(b)

$$B = \operatorname{Re}[B_s e^{j\omega t}] = \operatorname{Re} \left[\frac{20}{\rho} e^{j(\omega t - 2z)} a_\rho \right]$$

$$= \underline{\underline{\frac{20}{\rho} \cos(\omega t - 2z) a_\rho}}$$

$$(c) 1 + j2 = 2.23 e^{j63.43^\circ}$$

$$C_s = \frac{10}{r} (2.23) e^{j63.43^\circ} e^{-j\theta} \sin\theta a_z$$

$$C = \operatorname{Re}[C_s e^{j\omega t}] = \operatorname{Re}\left[\frac{22.36}{r^2} e^{j(\omega t - \phi + 63.43^\circ)} \sin \theta a_\phi\right]$$

$$= \underline{\underline{\frac{22.36}{r^2} \cos(\omega t - \phi + 63.43^\circ) \sin \theta a_\phi}}$$

Prob. 9.34

$$A = 4 \cos(\omega t - 90^\circ) a_x + 3 \cos \omega t a_y = \operatorname{Re}[4e^{j(\omega t - 90^\circ)} a_x + 3e^{j\omega t} a_y] = \operatorname{Re}[A_s e^{j\omega t}]$$

$$A_s = 4e^{-j90^\circ} a_x + 3a_y = \underline{\underline{-j4a_x + 3a_y}}$$

$$B_s = 10z e^{j90^\circ} e^{-jz} a_x$$

$$B = \operatorname{Re}[B_s e^{j\omega t}] = 10z \cos(\omega t - z + 90^\circ) a_x = \underline{\underline{-10z \sin(\omega t - z) a_z}}$$

Prob. 9.35 We begin with Maxwell's equations:

$$\nabla \cdot D = \rho_v / \epsilon = 0, \quad \nabla \cdot B = 0$$

$$\nabla_x E = - \frac{\partial B}{\partial t}, \quad \nabla_x H = J + \frac{\partial D}{\partial t}$$

We write these in phasor form and in terms of E_s and H_s only.

$$\nabla \cdot E_s = 0 \tag{1}$$

$$\nabla \cdot H_s = 0 \tag{2}$$

$$\nabla_x E_s = -j\omega \mu H_s \tag{3}$$

$$\nabla_x H_s = (\sigma + j\omega \epsilon) E_s \tag{4}$$

Taking the curl of (3),

$$\nabla_x \nabla_x E_s = -j\omega \mu \nabla_x H_s$$

$$\nabla_x (\nabla \cdot E_s) - \nabla^2 E_s = -j\omega \mu (\sigma + j\omega \epsilon) E_s$$

$$\nabla^2 E_s + (\omega^2 \mu \epsilon - j\omega \mu \sigma) E_s = 0 \longrightarrow \underline{\underline{\nabla^2 E_s + \gamma^2 E_s = 0}}$$

Similarly, by taking the curl of (4),

$$\nabla_x \nabla_x H_s = (\sigma + j\omega \epsilon) \nabla_x E_s$$

CHAPTER 10

P. E. 10.1 (a)

$$T = \frac{2\pi}{\omega} = \frac{2\pi}{2 \times 10^8} = 31.42 \text{ ns},$$

$$\lambda = uT = 3 \times 10^8 \times 31.42 \times 10^{-9} = 9.425 \text{ m}$$


$$k = \beta = 2\pi / \lambda = 0.677 \text{ rad/m}$$

$$(b) t_1 = T/8 = 3.927 \text{ ns}$$

(c)

$$H(t=t_1) = 0.1 \cos(2 \times 10^8 \frac{\pi}{8 \times 10^8} - 2x/3) a_y = 0.1 \cos(2x/3 - \pi/4) a_y$$

as sketched below.

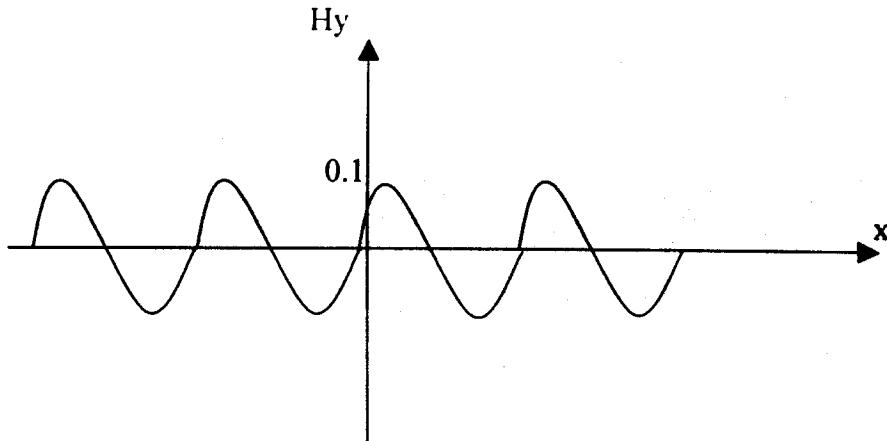

P. E. 10.2 Let $x_o = \sqrt{1 + (\sigma / \omega \epsilon)^2}$, then

$$\alpha = \omega \sqrt{\frac{\mu_o \epsilon_o}{2}} \mu_r \epsilon_r (x_o - 1) = \frac{\omega}{c} \sqrt{\frac{16}{2}} \sqrt{x_o - 1}$$

$$\text{or } \sqrt{x_o - 1} = \frac{\alpha c}{\omega \sqrt{8}} = \frac{1/3 \times 3 \times 10^8}{10^8 \sqrt{8}} = \frac{1}{\sqrt{8}} \rightarrow x_o = 9/8$$

$$x_o^2 = \frac{81}{64} = 1 + (\sigma / \omega \epsilon)^2 \rightarrow \frac{\sigma}{\omega \epsilon} = 0.5154$$

$$\tan 2\theta_\eta = 0.5154 \rightarrow \theta_\eta = 13.63''$$

$$\frac{\beta}{\alpha} = \sqrt{\frac{x_o + I}{x_o - I}} = \sqrt{17}$$

$$(a) \quad \beta = \alpha \sqrt{17} = \frac{\sqrt{17}}{3} = 1.374 \text{ rad/m}$$

$$(b) \quad \frac{\sigma}{\omega \epsilon} = 0.5154$$

$$(c) \quad |\eta| = \frac{\sqrt{\mu/\epsilon}}{\sqrt{x_o}} = \frac{120\pi \sqrt{2/8}}{\sqrt{9/8}} = 177.72$$

$$\eta = 177.72 \angle 13.63^\circ \Omega$$

$$(d) \quad u = \frac{\omega}{\beta} = \frac{10^8}{1.374} = 7.278 \times 10^7 \text{ m/s}$$

$$(e) \quad a_H = a_k x a_E \longrightarrow a_x x a_H = a_z \longrightarrow a_H = a_y$$

$$H = \frac{0.5}{177.5} e^{-z/3} \sin(10^8 t - \beta z - 13.63^\circ) a_y = 2.817 e^{-z/3} \sin(10^8 t - \beta z - 13.63^\circ) a_y \text{ mA/m}$$

P. E. 10.3 (a) Along -z direction

$$(b) \quad \lambda = \frac{2\pi}{\beta} = 2\pi / 2 = 3.142 \text{ m}$$

$$f = \frac{\omega}{2\pi} = \frac{10^8}{2\pi} = 15.92 \text{ MHz}$$

$$\beta = \omega \sqrt{\mu \epsilon} = \omega \sqrt{\mu_o \epsilon_o} \sqrt{\mu_r \epsilon_r} = \frac{\omega}{c} \sqrt{(I) \epsilon_r}$$

$$\text{or } \sqrt{\epsilon_r} = \beta c / \omega = \frac{3 \times 10^8 \times 2}{2 \times 10^8} = 6 \longrightarrow \underline{\epsilon_r = 3.6}$$

$$(c) \quad \theta_\eta = 0, |\eta| = \sqrt{\mu/\epsilon} = \sqrt{\mu_o/\epsilon_o} \sqrt{1/\epsilon_r} = \frac{120\pi}{6} = 20\pi$$

$$a_k = a_E x a_H \longrightarrow -a_z = a_y x a_H \longrightarrow a_H = a_x$$

$$H = \frac{50}{20\pi} \sin(\omega t + \beta z) a_x = \underline{\underline{795.8 \sin(10^8 t + 2z) a_x}} \text{ mA/m}$$

P. E. 10.4 (a)

$$\frac{\sigma}{\omega \epsilon} = \frac{10^{-2}}{10^9 \pi x 4x \frac{10^{-9}}{36\pi}} = 0.09$$

$$\alpha \approx \omega \sqrt{\frac{\mu \epsilon}{2} \left[1 + \frac{1}{2} \left(\frac{\sigma}{\omega \epsilon} \right)^2 - 1 \right]} = \frac{\omega}{2c} \sqrt{\mu_r \epsilon_r} \frac{\sigma}{\omega \epsilon} = \frac{10^9 \pi}{2 \times 3 \times 10^8} (2)(0.09) = 0.9425$$

$$\beta \approx \omega \sqrt{\frac{\mu \epsilon}{2} \left[1 + \frac{1}{2} \left(\frac{\sigma}{\omega \epsilon} \right)^2 + 1 \right]} = \frac{10^9 \pi}{3 \times 10^8} \sqrt{2[2 + 0.5(0.09)^2]} = 20.965$$

$$E = 30e^{-0.9425y} \cos(10^9 \pi t - 20.96y + \pi/4) a_z$$

At t = 2ns, y = 1m,

$$E = 30e^{-0.9425} \cos(2\pi - 20.96 + \pi/4) a_z = \underline{\underline{2.787 a_z}} \text{ V/m}$$

$$(b) \beta y = 10^\circ = \frac{10\pi}{180} \text{ rad}$$

or

$$y = \frac{\pi}{18} \frac{I}{\beta} = \frac{\pi}{18 \times 20.905} = \underline{\underline{8.325 \text{ mm}}}$$

$$(c) 30(0.6) = 30 e^{-\alpha y}$$

$$y = \frac{I}{\alpha} \ln(1/0.6) = \frac{I}{0.9425} \ln \frac{1}{0.6} = \underline{\underline{542 \text{ mm}}}$$

(d)

$$|\eta| \approx \frac{\sqrt{\mu/\epsilon}}{1 + \frac{1}{4} (0.09)^2} = \frac{60\pi}{1.002} = 188.11$$

$$2\theta_{\perp} = \tan^{-1} 0.09 \quad \longrightarrow \quad \theta_{\perp} = 2.57^\circ$$

$$\alpha_H = \alpha_x \alpha_E = \alpha_y \alpha_z = \alpha_x$$

$$H = \frac{30}{188.11} e^{-0.9425y} \cos(10^9 \pi t - 20.96y + \pi/4 - 2.57I^\circ) \alpha_x$$

At y = 2m, t = 5ns,

$$H = (0.1595)(0.1518) \cos(-4.5165 \text{ rad}) \alpha_x = \underline{\underline{-4.71 \alpha_x}} \text{ mA/m}$$

P. E. 10.5

$$I_s = \int_0^w \int_0^x J_{xs} dy dz = J_{xs}(0) \int_0^w dy \int_0^x e^{-z(l+j)\delta} dz = \frac{J_{xs}(0) w \delta}{l+j}$$

$$|I_s| = \frac{J_{xs}(0) w \delta}{\sqrt{2}}$$

P. E. 10.6 (a)

$$\frac{R_{ac}}{R_{dc}} = \frac{a}{2\delta} = \frac{a}{2} \sqrt{\pi f \mu \sigma} = \frac{1.3 \times 10^{-3}}{2} \sqrt{\pi \times 10^7 \times 4 \pi \times 10^{-7} \times 3.5 \times 10^7} = \underline{\underline{24.16}}$$

(b)

$$\frac{R_{ac}}{R_{dc}} = \frac{1.3 \times 10^{-3}}{2} \sqrt{\pi \times 2 \times 10^9 \times 4 \pi \times 10^{-7} \times 3.5 \times 10^7} = \underline{\underline{1080.54}}$$

P. E. 10.7

$$\mathcal{P}_{ave} = \frac{l}{2} \eta H_o^2 \alpha_x$$

(a) Let $f(x,z) = x + z - 1 = 0$

$$\alpha_n = \frac{\nabla f}{|\nabla f|} = \frac{\alpha_x + \alpha_z}{\sqrt{2}}, \quad dS = dS \alpha_n$$

$$P_t = \int \mathcal{P} \cdot dS = \mathcal{P} \cdot S \alpha_n = \frac{1}{2} \eta H_o^2 \alpha_x \cdot \frac{\alpha_x + \alpha_z}{\sqrt{2}}$$

$$= \frac{l}{2\sqrt{2}} (120\pi)(0.2)^2(0.1)^2 = 53.31 \text{ mW}$$

$$|\eta_2| = \frac{60\pi}{\sqrt{1 + 1.44\pi^2}} = 95.445, \eta_1 = 120\pi\sqrt{\epsilon_{rl}} = 754$$

$$\tan 2\theta_{\eta_2} = 1.2\pi \longrightarrow \theta_{\eta_2} = 37.57^\circ$$

$$\eta_2 = 95.445 \angle 37.57^\circ$$

(a)

$$\Gamma = \frac{\eta_2 - \eta_1}{\eta_2 + \eta_1} = \frac{95.445 \angle 37.57^\circ - 754}{95.445 \angle 37.57^\circ + 754} = \underline{\underline{0.8186 \angle 171.08^\circ}}$$

$$\tau = I + \Gamma = \underline{\underline{0.2295 \angle 33.56^\circ}}$$

$$s = \frac{I + |\Gamma|}{I - |\Gamma|} = \frac{I + 0.8186}{I - 0.8186} = \underline{\underline{10.025}}$$

$$(b) \quad E_t = 50 \sin(\omega t - 5x) a_y = \text{Im}(E_{ts} e^{j\omega t}), \text{ where } E_{ts} = 50 e^{-j5x} a_y.$$

$$E_{ro} = \Gamma E_{ts} = 0.8186 e^{j171.08^\circ} (50) = 40.93 e^{j171.08^\circ}$$

$$E_{rs} = 40.93 e^{j5x + j171.08^\circ} a_y$$

$$E_r = \text{Im}(E_{rs} e^{j\omega t}) = \underline{\underline{40.93 \sin(\omega t + 5x + 171.1^\circ) a_y \text{ V/m}}}$$

$$a_H = a_k x a_E = -a_x x a_y = -a_z$$

$$H_r = -\frac{40.93}{754} \sin(\omega t + 5x + 171.1^\circ) a_z = \underline{\underline{-0.0543 \sin(\omega t + 5x + 171.1^\circ) a_z \text{ A/m}}}$$

(c)

$$E_{wo} = \tau E_{ts} = 0.229 e^{j33.56^\circ} (50) = 11.475 e^{j33.56^\circ}$$

$$E_{ts} = 11.475 e^{-j0.021x} e^{-a_z x} a_y$$

$$E_t = \text{Im}(E_{ts} e^{j\omega t}) = \underline{\underline{11.475 e^{-6.021x} \sin(\omega t - 7.826x + 33.56^\circ) a_y \text{ V/m}}}$$

$$a_H = a_k x a_E = a_x x a_y = a_z$$

$$H_t = \frac{11.495}{95.445} e^{-6.02tx} \sin(\omega t - 7.826x + 33.56^\circ - 37.57^\circ) a_z \\ = 0.1202 e^{-6.02tx} \sin(\omega t - 7.826x - 4.01^\circ) a_z \text{ A/m}$$

(d)

$$\mathcal{P}_{\text{ave}} = \frac{E_{\text{to}}^2}{2\eta_1} a_x + \frac{E_{\text{ro}}^2}{2\eta_1} (-a_x) = \frac{I}{2(240\pi)} [50^2 a_x - 40.93^2 a_x] = 0.5469 a_x \text{ W/m}^2$$

$$\mathcal{P}_{\text{ave}} = \frac{E_{\text{to}}^2}{2|\eta_2|} e^{-2a_x x} \cos \theta_{\eta_2} a_x = \frac{(11.475)^2}{2(95.445)} \cos 37.57^\circ e^{-2(6.02t)x} a_x = 0.5469 e^{-12.04x} a_x \text{ W/m}^2$$

P. E. 10.10 (a)

$$k = -2a_y + 4a_z \longrightarrow k = \sqrt{2^2 + 4^2} = \sqrt{20}$$


$$\omega = kc = 3 \times 10^8 \sqrt{20} = 1.342 \times 10^9 \text{ rad/s},$$

$$\lambda = 2\pi k = 28.1 \text{ m}$$

$$(b) H = \frac{a_k x E}{\eta_o} = \frac{(-2a_y + 4a_z)}{\sqrt{20}(120\pi)} x (10a_y + 5a_z) \cos(\omega t - k.r)$$

$$= -29.66 \cos(1.342 \times 10^9 t + 2y - 4z) a_x \text{ mA/m}$$

$$(c) \mathcal{P}_{\text{ave}} = \frac{|E_o|^2}{2\eta_o} a_k = \frac{125}{2(120\pi)} \frac{(-2a_y + 4a_z)}{\sqrt{20}} = -74.15 a_y + 148.9 a_z \text{ W/m}^2$$

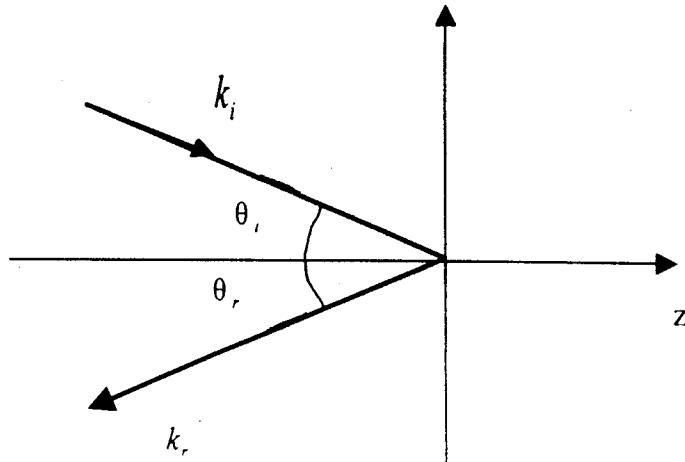P. E. 10.11 (a)

$$\tan \theta_r = \frac{k_y}{k_z} = \frac{2}{4} \longrightarrow \underline{\theta_r = 26.56^\circ = \theta_r}$$

$$\sin \theta_r = \sqrt{\frac{\mu_1 \epsilon_1}{\mu_2 \epsilon_2}} \sin \theta_i = \frac{1}{2} \sin 26.56^\circ \longrightarrow \underline{\theta_i = 12.92^\circ}$$

(b) $\eta_1 = \eta_o, \eta_2 = \eta_o / 2$, \mathbf{E} is parallel to the plane of incidence. Since $\mu_1 = \mu_2 = \mu_o$, we may use the result of Prob. 10.42, i.e.

$$\Gamma_{\text{II}} = \frac{\tan(\theta_i - \theta_r)}{\tan(\theta_i + \theta_r)} = \frac{\tan(-13.64^\circ)}{\tan(39.48^\circ)} = \underline{-0.2946}$$

$$\tau_{\text{II}} = \frac{2 \cos 26.56^\circ \sin 12.92^\circ}{\sin 39.48^\circ \cos(-13.64^\circ)} = \underline{0.6474}$$

(c) $k_r = -\beta_r \sin \theta_r \mathbf{a}_y - \beta_r \cos \theta_r \mathbf{a}_z$. Once k_r is known, \mathbf{E}_r is chosen such that

$k_r \cdot \mathbf{E}_r = 0$ or $\nabla \cdot \mathbf{E}_r = 0$. Let

$$\mathbf{E}_r = \pm E_{or} (-\cos \theta_r \mathbf{a}_y + \sin \theta_r \mathbf{a}_z) \cos(\omega t + \beta_r \sin \theta_r y + \beta_r \cos \theta_r z)$$

Only the positive sign will satisfy the boundary conditions. It is evident that

$$E_r = E_{oi} (\cos \theta_r \mathbf{a}_y + \sin \theta_r \mathbf{a}_z) \cos(\omega t + 2y - 4z)$$

Since $\theta_r = \theta_i$,

$$E_{oi} \cos \theta_r = \Gamma_{II} E_{oi} \cos \theta_i = 10 \Gamma_{II} = -2.946$$

$$E_{oi} \sin \theta_r = \Gamma_{II} E_{oi} \sin \theta_i = 5 \Gamma_{II} = -1.473$$

$$\beta_r \sin \theta_r = 2, \beta_r \cos \theta_r = 4$$

i.e.

$$\mathbf{E}_r = -(2.946 \mathbf{a}_y - 1.473 \mathbf{a}_z) \cos(\omega t + 2y - 4z)$$

$$E_r = E_i + \mathbf{E}_r = \underline{(10 \mathbf{a}_y + 5 \mathbf{a}_z) \cos(\omega t + 2y - 4z) + (-2.946 \mathbf{a}_y + 1.473 \mathbf{a}_z) \cos(\omega t + 2y + 4z)}$$


V/m

$$\text{At } t=T/4, E_z = 25 \sin\left(\frac{2\pi}{T} \frac{T}{4} - 6x\right) = 25 \sin(-6x + 90^\circ) = 25 \cos 6x$$


$$\text{At } t=T/2, E_z = 25 \sin\left(\frac{2\pi}{T} \frac{T}{2} - 6x\right) = 25 \sin(-6x + \pi) = 25 \sin 6x$$

These are sketched below.


$t=0$

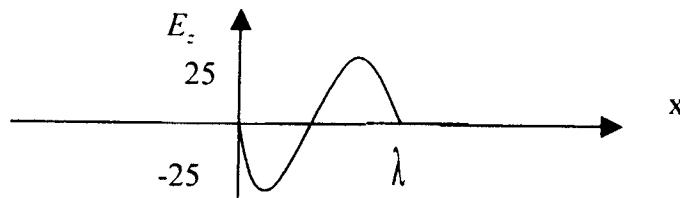


$t=T/8$

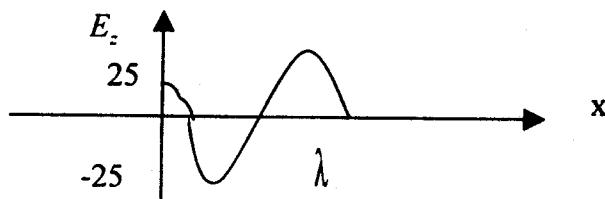

$t=T/4$

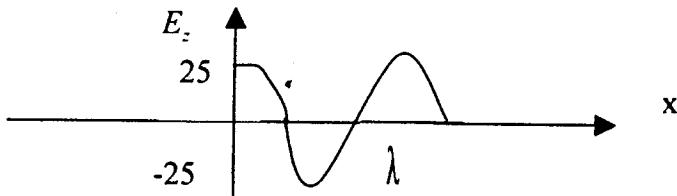

$t=T/2$

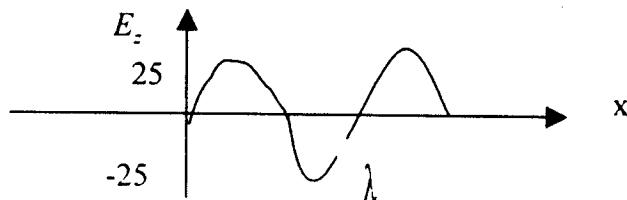

Prob. 10.2 If

$\gamma^2 = j\omega\mu(\sigma + j\omega\varepsilon) = -\omega^2\mu\varepsilon + j\omega\mu\sigma$ and $\gamma = \alpha + j\beta$, then

$$|\gamma^2| = \sqrt{(\alpha^2 - \beta^2)^2 + 4\alpha^2\beta^2} = \sqrt{(\alpha^2 + \beta^2)^2} = \alpha^2 + \beta^2$$

i.e.

$$\alpha^2 + \beta^2 = \omega\mu\sqrt{(\sigma^2 + \omega^2\varepsilon^2)} \quad (1)$$

$$\operatorname{Re}(\gamma^2) = \alpha^2 - \beta^2 = -\omega^2\mu\varepsilon$$

$$\beta^2 - \alpha^2 = \omega^2\mu\varepsilon \quad (2)$$

Subtracting and adding (1) and (2) lead respectively to

$$\alpha = \omega\sqrt{\frac{\mu\varepsilon}{2}\left[\sqrt{1 + \left(\frac{\sigma}{\omega\varepsilon}\right)^2} - 1\right]}$$

$$\beta = \omega\sqrt{\frac{\mu\varepsilon}{2}\left[\sqrt{1 + \left(\frac{\sigma}{\omega\varepsilon}\right)^2} + 1\right]}$$

(b) From eq. (10.25), $E_s(z) = E_o e^{-\gamma z} a_x$.

$$\nabla_x E = -j\omega\mu H_s \longrightarrow H_s = \frac{j}{\omega\mu} \nabla_x E_s = \frac{j}{\omega\mu} (-\gamma E_o e^{-\gamma z} a_y)$$

$$\text{But } H_s(z) = H_o e^{-\gamma z} a_y, \text{ hence } H_o = \frac{E_o}{\eta} = -\frac{j\gamma}{\omega\mu} E_o$$

$$\eta = \frac{j\omega\mu}{\gamma}$$

(c) From (b),

$$\eta = \frac{j\omega\mu}{\sqrt{j\omega\mu(\sigma + j\omega\varepsilon)}} = \sqrt{\frac{j\omega\mu}{\sigma + j\omega\varepsilon}} = \sqrt{\frac{\mu/\varepsilon}{1 - j\frac{\sigma}{\omega\varepsilon}}}$$

$$(c) \quad \epsilon_c = \epsilon(1 - j\frac{\sigma}{\omega \epsilon}) = 1.234 \times \frac{10^{-9}}{36\pi} (1 - j1.732) = \underline{(1.091 - j1.89) \times 10^{-11}} \text{ F/m}$$

(d)

$$\alpha = \frac{\omega}{c} \sqrt{\frac{\mu_r \epsilon_r}{2} \left[\sqrt{1 + \left(\frac{\sigma}{\omega \epsilon} \right)^2} - 1 \right]} = \frac{2\pi \times 10^6}{3 \times 10^8} \sqrt{\frac{1}{2} \frac{\pi^2}{8} \left[\sqrt{I+3} - I \right]} = \underline{0.0164} \text{ Np/m}$$

Prob. 10.6 (a) $|E| = E_o e^{-\alpha z}$

$$E_o e^{-\alpha z} = (1 - 0.18) E_o \rightarrow e^{-\alpha} = 0.82$$

$$\alpha = \ln \frac{1}{0.82} = 0.1984$$

$$\theta_\eta = 24^\circ \rightarrow \tan 2\theta_\eta = \frac{\sigma}{\omega \epsilon} = 1.111$$

$$\frac{\alpha}{\beta} = \frac{\sqrt{\sqrt{1 + \left(\frac{\sigma}{\omega \epsilon} \right)^2} - 1}}{\sqrt{\sqrt{1 + \left(\frac{\sigma}{\omega \epsilon} \right)^2} + 1}} = \sqrt{\frac{\sqrt{2.233} - 1}{\sqrt{2.233} + 1}} = 2.247, \quad \beta = 0.4458$$

$$\gamma = \alpha + j\beta = \underline{0.1984 + j0.4458} \text{ /m}$$

$$(b) \quad \lambda = \frac{2\pi}{\beta} = 2\pi / 0.4458 = \underline{14.09} \text{ m}$$

$$(c) \quad \delta = 1/\alpha = \underline{5.04} \text{ m}$$

(d) Since

$$\alpha = \omega \sqrt{\frac{\mu \epsilon}{2} \left[\sqrt{1 + \left(\frac{\sigma}{\omega \epsilon} \right)^2} - 1 \right]} = \frac{\omega}{c} \sqrt{\frac{\mu_r \epsilon_r}{2}} \sqrt{0.494}, \quad \mu_r = 1$$

$$\sqrt{\frac{\epsilon_r}{2}} = \frac{\alpha c}{\omega \sqrt{0.494}} = \frac{0.1984 \times 3 \times 10^8}{2\pi \times 10^7 \sqrt{0.494}} = 1.348 \rightarrow \epsilon_r = 3.633$$

Since $\frac{\sigma}{\omega \epsilon} = 1.111$

$$\sigma = \omega \epsilon_0 \epsilon_r x 1.111 = 2\pi x 10^7 x \frac{10^{-9}}{36\pi} x 3.633 x 1.111 = \underline{\underline{2.24 \times 10^{-3}}} \text{ S/m}$$

Prob. 10.7

$$\frac{\sigma}{\omega \epsilon} = \frac{4}{2\pi x 10^5 x 81 x 10^{-9} / 36\pi} = \frac{80,000}{9} \gg 1$$

$$\alpha = \beta = \sqrt{\frac{\omega \mu \sigma}{2}} = \sqrt{\frac{2\pi x 10^5}{2} x 4\pi x 10^{-7} x 4} = 0.4\pi$$

$$(a) u = \omega / \beta = \frac{2\pi x 10^5}{0.4\pi} = \underline{\underline{5 \times 10^5}} \text{ m/s}$$

$$(b) \lambda = 2\pi / \beta = \frac{2\pi}{0.4\pi} = \underline{\underline{5}} \text{ m}$$

$$(c) \delta = I / \alpha = \frac{I}{0.4\pi} = \underline{\underline{0.796}} \text{ m}$$

$$(d) \eta = |\eta| \angle \theta_\eta, \theta_\eta = 45^\circ$$

$$|\eta| = \frac{\sqrt{\frac{\mu}{\epsilon}}}{\sqrt{1 + \left(\frac{\sigma}{\omega \epsilon}\right)^2}} \approx \sqrt{\frac{\mu \omega \epsilon}{\epsilon \sigma}} = \sqrt{\frac{4\pi x 10^{-7} x 2\pi x 10^8}{4}} = 14.05$$

$$\eta = \underline{\underline{14.05 \angle 45^\circ}} \Omega$$

Prob. 10.8 (a)

$$T = I / f = 2\pi / \omega = \frac{2\pi}{\pi x 10^8} = \underline{\underline{20}} \text{ ns}$$

$$(b) \text{ Let } x = \sqrt{1 + \left(\frac{\sigma}{\omega \epsilon}\right)^2}$$

$$\frac{\alpha}{\beta} = \left(\frac{x - I}{x + I} \right)^2$$

$$\text{But } \alpha = \frac{\omega}{c} \sqrt{\frac{\mu_r \epsilon_r}{2}} \sqrt{x - 1}$$

$$\sqrt{x - 1} = \frac{\alpha c}{\omega \sqrt{\frac{\mu_r \epsilon_r}{2}}} = \frac{0.1 \times 3 \times 10^8}{\pi \times 10^8 \sqrt{2}} = 0.06752 \rightarrow x = 1.0046$$

$$\beta = \left(\frac{x + 1}{x - 1} \right)^{1/2} \alpha = \left(\frac{2.0046}{0.0046} \right)^{1/2} 0.1 = 2.088$$

$$\lambda = 2\pi / \beta = \frac{2\pi}{2.088} = 3 \text{ m}$$

$$(c) |\eta| = \frac{\sqrt{\mu/\epsilon}}{\sqrt{x}} = \frac{377}{2\sqrt{1.0046}} = 188.1$$

$$x = \sqrt{1 + \left(\frac{\sigma}{\omega \epsilon} \right)^2} = 1.0046$$

$$\frac{\sigma}{\omega \epsilon} = 0.096 = \tan 2\theta_n \rightarrow \theta_n = 2.74^\circ$$

$$\eta = 188.1 \angle 2.74^\circ \quad \Omega$$

$$E_o = \eta H_o = 12 \times 188.1 = 2256.84$$

$$a_E x a_H = a_k \rightarrow a_E x a_x = a_y \rightarrow a_E = a_z$$

$$E = \underline{2.256 e^{-0.1y} \sin(\pi x 10^8 t - 2.088 y + 2.74^\circ)} a_z \text{ kV/m}$$

(e) The phase difference is 2.74°.

Prob. 10.9 (a) $\gamma = \alpha + j\beta = \underline{0.05 + j2} \text{ /m}$

(b) $\lambda = 2\pi / \beta = \pi = \underline{3.142} \text{ m}$

(c) $u = \omega / \beta = \frac{2 \times 10}{2} = \underline{10^4} \text{ m/s}$

$$\beta = \omega \sqrt{\mu \epsilon} = \frac{\omega}{c} \sqrt{\mu_r \epsilon_r}$$

$$\sqrt{\epsilon_r} = \beta c / \omega = \frac{6 \times 3 \times 10^8}{2 \times 10^8} = 9 \quad \longrightarrow \quad \epsilon_r = 81$$

$$\epsilon = \epsilon_0 \epsilon_r = \frac{10^{-9}}{36\pi} \times 81 = \underline{7.162 \times 10^{-10}} \text{ F/m}$$

$$(c) \eta = \sqrt{\mu/\epsilon} = \sqrt{\mu_0/\epsilon_0} \sqrt{\mu_r/\epsilon_r} = \frac{120\pi}{9}$$

$$E_o = H_o \eta = 25 \times 10^{-3} \times 377 / 9 = 1.047$$

$$a_E x a_H = a_k \longrightarrow a_E x a_y = -a_x \longrightarrow a_E = a_z$$

$$E = \underline{1.047 \sin(2\pi 10^8 t + 6x)} a_z \text{ V/m}$$

Prob. 10.12 $\beta = 4 \longrightarrow \lambda = 2\pi/\beta = \underline{1.571} \text{ m}$

Also, $\beta = \omega/u = \omega \sqrt{\mu \epsilon} = \frac{\omega}{c} \sqrt{\mu_r \epsilon_r}$

$$\omega = \frac{\beta c}{\sqrt{\mu_r \epsilon_r}} = \frac{4 \times 3 \times 10^8}{\sqrt{4}} = \underline{6 \times 10^8} \text{ rad/s}$$

$$J_d = \nabla x H = \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ H_x(z) & 0 & 0 \end{vmatrix} = \frac{\partial H_x}{\partial z} a_y$$

$$J_d = -40 \cos(\omega t - 4z) x 10^{-3} a_y = \underline{-40 \cos(\omega t - 4z) a_y} \text{ mA/m}^2$$

Prob. 10.13 (a) $\frac{\sigma}{\omega \epsilon} = \frac{10^{-6}}{2\pi x 10^7 x 5 x \frac{10^{-9}}{36\pi}} = 3.6 \times 10^{-4} \ll 1$

Thus, the material is lossless at this frequency.

Similarly,

$$\nabla \times H = \frac{\partial D}{\partial t} \quad \longrightarrow \quad kxH = -\varepsilon\omega E$$

From $kxE = \omega \mu H$, $a_k x a_E = a_H$ and

From $kxH = -\varepsilon\omega E$, $a_k x a_H = -a_E$

Prob. 10.16 (a)

$$\beta = \frac{\omega}{c} \sqrt{\varepsilon_r} \quad \longrightarrow \quad \sqrt{\varepsilon_r} = \frac{\beta c}{\omega} = \frac{5 \times 3 \times 10^8}{2\pi \times 10^8} = \frac{15}{2\pi}$$

$$\underline{\underline{\varepsilon_r}} = 5.6993$$

$$(b) \quad \lambda = 2\pi / \beta = 2\pi / 5 = \underline{\underline{1.2566}} \text{ m}$$

$$u = \frac{c}{\sqrt{\mu_r \varepsilon_r}} = \frac{3 \times 10^8}{\frac{15}{2\pi}} = \underline{\underline{1.257 \times 10^8}} \text{ m/s}$$

$$(c) \eta = \eta_0 \sqrt{\frac{\mu_r}{\varepsilon_r}} = \frac{120\pi}{\frac{15}{2\pi}} = \underline{\underline{157.91 \Omega}}$$

$$(d) \quad a_E x a_H = a_k \longrightarrow a_E x a_z = a_x \longrightarrow a_E = \underline{\underline{a_y}}$$

$$(e) \quad E = 30 \times 10^{-3} (157.91) \sin(\omega t - \beta x) a_E = \underline{\underline{4.737 \sin(2\pi x 10^8 t - 5x) a_y}} \text{ V/m}$$

$$(f) \quad J_d = \frac{\partial D}{\partial t} = \nabla \times H = \underline{\underline{0.15 \cos(2\pi x 10^8 t - 5x) a_y}} \text{ A/m}$$

$$\text{Prob. 10.17} \quad \beta = \omega \sqrt{\mu \varepsilon} = \frac{\omega}{c} \sqrt{\varepsilon_r} \sqrt{\mu_r}, \quad \mu_r = 1$$

$$\sqrt{\varepsilon_r} = \frac{\beta c}{\omega} = \frac{8 \times 3 \times 10^8}{10^9} = 2.4 \quad \longrightarrow \quad \underline{\underline{\varepsilon_r = 5.76}}$$

$$\text{Let } \mathbf{E} = \mathbf{E}_1 + \mathbf{E}_2$$

$$(a) \frac{\sigma}{\omega \epsilon} = \frac{10^{-2}}{2\pi x 8 \times 10^6 x 15 x \frac{10^{-9}}{36\pi}} = 1.5 \longrightarrow \text{lossy}$$

No, not conducting.

$$(b) \frac{\sigma}{\omega \epsilon} = \frac{0.025}{2\pi x 8 \times 10^6 x 16 x \frac{10^{-9}}{36\pi}} = 3.515 \longrightarrow \text{lossy}$$

No, not conducting.

$$(c) \frac{\sigma}{\omega \epsilon} = \frac{25}{2\pi x 8 \times 10^6 x 81 x \frac{10^{-9}}{36\pi}} = 694.4 \longrightarrow \text{conducting}$$

Yes, conducting.

Prob. 10.20

$$\alpha = \omega \sqrt{\frac{\mu \epsilon}{2} \left[\sqrt{1 + \left(\frac{\sigma}{\omega \epsilon} \right)^2} - 1 \right]} = \frac{2\pi f}{c} \sqrt{\frac{\mu_r \epsilon_r}{2} [\sqrt{1.0049} - 1]} = \frac{2\pi x 6 \times 10^6}{3 \times 10^8} \sqrt{\frac{4}{2} x 2.447 x 10^{-3}}$$

$$\alpha = 8.791 \times 10^{-3}$$

$$\delta = l / \alpha = 113.75 \text{ m}$$

$$\beta = \omega \sqrt{\frac{\mu \epsilon}{2} \left[\sqrt{1 + \left(\frac{\sigma}{\omega \epsilon} \right)^2} + 1 \right]} = \frac{4\pi}{100} \sqrt{\frac{4}{2} [\sqrt{1.0049} + 1]} = 0.2515$$

$$u = \omega / \beta = \frac{2\pi x 6 \times 10^6}{0.2515} = \underline{1.5 \times 10^8} \text{ m/s}$$

$$\text{Prob. 10.21} \quad 0.4 E_o = E_o e^{-\alpha z} \longrightarrow \frac{l}{0.4} = e^{2a}$$

$$\text{Or } \alpha = \frac{l}{2} \ln \frac{l}{0.4} = 0.4581 \longrightarrow \delta = l / \alpha = \underline{2.183} \text{ m}$$

$$\lambda = 2\pi / \beta = 2\pi / 1.6$$

$$u = f \lambda = 10^7 x \frac{2\pi}{1.6} = \underline{3.927 \times 10^7} \text{ m/s}$$

Prob. 10.26 (a)

$$E = \operatorname{Re}[E_i e^{j\omega t}] = (5a_x + 12a_y)e^{-\theta/2z} \cos(\omega t - 3.4z)$$

At $z = 4\text{m}$, $t = T/8$, $\omega t = \frac{2\pi}{T} \frac{T}{8} = \frac{\pi}{4}$

$$E = (5a_x + 12a_y)e^{-\theta/8} \cos(\pi/4 - 13.6)$$

$$|E| = 13e^{-\theta/8} |\cos(\pi/4 - 13.6)| = \underline{5.662}$$

(b) loss = $\alpha \Delta z = 0.2(3) = 0.6 \text{ Np}$. Since $1 \text{ Np} = 8.686 \text{ dB}$,

$$\text{loss} = 0.6 \times 8.686 = \underline{5.212 \text{ dB}}$$

(c) Let $x = \sqrt{1 + \left(\frac{\sigma}{\omega \epsilon}\right)^2}$

$$\frac{\alpha}{\beta} = \left(\frac{x-1}{x+1}\right)^{1/2} = 0.2/3.4 = \frac{1}{17}$$

$$\frac{x-1}{x+1} = 1/289 \quad \longrightarrow \quad x = 1.00694$$

$$\alpha = \omega \sqrt{\mu \epsilon / 2} \sqrt{x-1} = \frac{\omega}{c} \sqrt{\epsilon_r / 2} \sqrt{x-1}$$

$$\sqrt{\frac{\epsilon_r}{2}} = \frac{\alpha c}{\omega \sqrt{x-1}} = \frac{0.2 \times 3 \times 10^3}{10^8 \sqrt{0.00694}} = 2.4 \quad \longrightarrow \quad \epsilon_r = 11.52$$

$$|\eta| = \frac{\sqrt{\frac{\mu_o}{\epsilon_o}} \cdot \frac{1}{\sqrt{\epsilon_r}}}{\sqrt{x}} = \frac{120\pi}{\sqrt{11.52 \times 1.00694}} = 32.5$$

$$\tan 2\theta_\eta = \frac{\sigma}{\omega \epsilon} = \sqrt{x^2 - 1} = 0.118 \quad \longrightarrow \quad \theta_\eta = 3.365^\circ$$

$$\eta = 32.5 \angle 3.365^\circ$$

$$\begin{aligned}
 \mathcal{P} &= ExH = E_r x H_r \cos^2 \omega t + E_i x H_i \sin^2 \omega t - \frac{1}{2} (E_r x H_i + E_i x H_r) \sin 2\omega t \\
 \mathcal{P}_{ave} &= \frac{1}{T} \int_0^T \mathcal{P} dt = \frac{1}{T} \int_0^T \cos^2 \omega dt (E_r x H_r) + \frac{1}{T} \int_0^T \sin^2 \omega dt (E_i x H_i) - \frac{1}{2T} \int_0^T \sin 2\omega dt (E_r x H_i + E_i x H_r) \\
 &= \frac{1}{2} (E_r x H_r + E_i x H_i) = \frac{1}{2} \operatorname{Re}[(E_r + jE_i)x(H_r - jH_i)] \\
 \mathcal{P}_{ave} &= \frac{1}{2} \operatorname{Re}(E_s x H_s)
 \end{aligned}$$

as required.

Prob. 10.29 (a)

$$u = \omega / \beta \quad \longrightarrow \quad \omega = u\beta = \frac{\beta}{c} \frac{I}{\sqrt{4.5}} = \frac{2 \times 3 \times 10^8}{\sqrt{4.5}} = \underline{2.828 \times 10^8 \text{ rad/s}}$$

$$\eta = \frac{120\pi}{\sqrt{4.5}} = 177.7 \Omega$$

$$H = a_k x \frac{E}{\eta} = \frac{a_z}{\eta} x \frac{40}{\rho} \sin(\omega t - 2z) a_p = \underline{\underline{\frac{0.225}{\rho} \sin(\omega t - 2z) a_p \text{ A/m}}}$$

$$(b) \quad \mathcal{P} = ExH = \underline{\underline{\frac{9}{\rho^2} \sin^2(\omega t - 2z) a_z \text{ W/m}^2}}$$

$$(c) \quad \mathcal{P}_{ave} = \frac{4.5}{\rho^2} a_z, dS = \rho d\phi d\rho a_z$$

$$P_{ave} = \int \mathcal{P}_{ave} \bullet dS = 4.6 \int_{2\pi}^{3\pi} \frac{d\rho}{\rho} \int_0^{2\pi} d\phi = 4.5 \ln(3/2)(2\pi) = \underline{11.46 \text{ W}}$$

$$\text{Prob. 10.30 (a)} \quad P_{r,ave} = \frac{E_{wo}^2}{2\eta_1}, \quad P_{i,ave} = \frac{E_{ro}^2}{2\eta_1}, \quad P_{t,ave} = \frac{E_{to}^2}{2\eta_2}$$

$$R = \frac{P_{r,ave}}{P_{i,ave}} = \frac{E_{ro}^2}{E_{wo}^2} = \Gamma^2 = \underline{\underline{\left(\frac{\eta_2 - \eta_1}{\eta_2 + \eta_1} \right)^2}}$$

$$R = \left(\frac{\sqrt{\frac{\mu_o}{\epsilon_2}} - \sqrt{\frac{\mu_o}{\epsilon_1}}}{\sqrt{\frac{\mu_o}{\epsilon_2}} + \sqrt{\frac{\mu_o}{\epsilon_1}}} \right)^2 = \left(\frac{\sqrt{\mu_o \epsilon_1} - \sqrt{\mu_o \epsilon_2}}{\sqrt{\mu_o \epsilon_1} + \sqrt{\mu_o \epsilon_2}} \right)^2$$

Since $n_1 = c\sqrt{\mu_1 \epsilon_1} = c\sqrt{\mu_o \epsilon_1}$, $n_2 = c\sqrt{\mu_o \epsilon_2}$,

$$R = \left(\frac{n_1 + n_2}{n_1 - n_2} \right)^2$$

$$T = \frac{P_{t,ave}}{P_{r,ave}} = \frac{\eta_1}{\eta_2} \frac{E_{io}^2}{E_{ro}^2} = \frac{\eta_1}{\eta_2} \tau^2 = \frac{4n_1 n_2}{(n_1 + n_2)^2}$$

$$(b) \text{ If } P_{r,ave} = P_{t,ave} \longrightarrow R P_{t,ave} = T P_{t,ave} \longrightarrow R = T$$

$$\text{i.e. } (n_1 - n_2)^2 = 4n_1 n_2 \longrightarrow n_1^2 - 6n_1 n_2 + n_2^2 = 0$$

$$\frac{n_1}{n_2} = 3 \pm \sqrt{8} = \underline{\underline{5.828}} \quad \text{or} \quad \underline{\underline{0.1716}}$$

$$\text{Prob. 10.31 (a)} \quad \eta_1 = \eta_o, \quad \eta_o = \sqrt{\frac{\mu}{\epsilon}} = \eta_o / 2$$

$$\Gamma = \frac{\eta_2 - \eta_1}{\eta_2 + \eta_1} = \frac{\eta_o / 2 - \eta_o}{3\eta_o / 2} = \underline{\underline{-1/3}}, \quad \tau = \frac{2\eta_2}{\eta_2 + \eta_1} = \frac{\eta_o}{3\eta_o / 2} = \underline{\underline{2/3}}$$

$$s = \frac{I + |\Gamma|}{I - |\Gamma|} = \frac{I + 1/3}{I - 1/3} = \underline{\underline{2}}$$

$$(b) \quad E_{or} = \Gamma E_{oi} = -\frac{1}{3} x(30) = -10$$

$$\underline{\underline{E_r = -10 \cos(\omega t + z) a_x \text{ V/m}}}$$

$$\text{Let } H_r = H_{or} \cos(\omega t + z) a_H$$

$$a_E x a_H = a_k \longrightarrow -a_k x a_H = -a_z \longrightarrow a_H = a_z$$

$$H_r = \frac{10}{120\pi} \cos(\omega t + z) a_y = \underline{\underline{26.53 \cos(\omega t + z) a_y}} \text{ mA/m}$$

Prob. 10.32 (a) $\eta_1 = \eta_o$

$$E_i = E_{io} \sin(\omega t - 5x) a_z$$

$$E_{io} = H_{io} \eta_o = 120\pi \times 4 = 480\pi$$

$$a_E x a_H = a_k \rightarrow a_E x a_y = a_x \rightarrow a_E = -a_z$$

$$E_i = -480\pi \sin(\omega t - 5x) a_z$$

$$\eta_2 = \sqrt{\frac{\mu_o}{\epsilon_o}} = \frac{120\pi}{\sqrt{4}} = 60\pi$$

$$\Gamma = \frac{\eta_2 - \eta_1}{\eta_2 + \eta_1} = \frac{60\pi - 120\pi}{60\pi + 120\pi} = -1/3, \quad \tau = 1 + \Gamma = 2/3$$

$$E_{ro} = \Gamma E_{io} = (-1/3)(480\pi) = -160\pi$$

$$E_r = 160\pi \sin(\omega t + 5x) a_z$$

$$E_i = E_i + E_r = \underline{\underline{-1.508 \sin(\omega t - 5x) a_z + 0.503 \sin(\omega t + 5x) a_z}} \text{ kV/m}$$

$$(b) \quad E_{io} = \tau E_{io} = (2/3)(480\pi) = 320\pi$$

$$\mathcal{P} = \frac{E_{io}^2}{2\eta_2} a_x = \frac{(320\pi)^2}{2(60\pi)} a_x = \underline{\underline{2.68 a_x \text{ kW/m}^2}}$$

$$(c) \quad s = \frac{1 + |\Gamma|}{1 - |\Gamma|} = \frac{1 + 1/3}{1 - 1/3} = \underline{\underline{2}}$$

Prob. 10.33 $\eta_1 = \eta_o = 120\pi, \quad \eta_2 = \sqrt{\frac{\mu_2}{\epsilon_2}}$

$$\frac{E_{ro}}{E_{io}} = \Gamma = \frac{\eta_2 - \eta_1}{\eta_2 + \eta_1} \quad (1)$$

$$\text{But} \quad E_{ro} = \eta_o H_{ro} \quad (2)$$

Prob. 10.35 (a) $\beta = I = \omega / u = \frac{\omega}{c} \sqrt{\mu_r \epsilon_r}$

$$\omega = \frac{c}{\sqrt{\mu_r \epsilon_r}} = \frac{3 \times 10^8}{\sqrt{3 \times 12}} = \underline{0.5 \times 10^8 \text{ rad/s}}$$

(b) $\eta_1 = \eta_o, \quad \eta_2 = \eta_o \sqrt{\frac{\mu_r}{\epsilon_r}} = \eta_o \sqrt{\frac{3}{12}} = \eta_o / 2$

$$\Gamma = \frac{\eta_2 - \eta_1}{\eta_2 + \eta_1} = -1/3, \quad \tau = I + \Gamma = 2/3$$

$$s = \frac{I + |\Gamma|}{I - |\Gamma|} = \frac{I + 1/3}{I - 1/3} = \underline{\underline{2}}$$

(c) Let $H_r = H_{or} \cos(\omega t + z) \mathbf{a}_H$, where

$$E_r = -\frac{1}{3}(3) \cos(\omega t + z) \mathbf{a}_y = -10 \cos(\omega t + z) \mathbf{a}_y, \quad H_{or} = \frac{10}{\eta_o} = \frac{10}{120\pi}$$

$$\mathbf{a}_E \cdot \mathbf{a}_H = \mathbf{a}_k \longrightarrow -\mathbf{a}_y \cdot \mathbf{a}_H = -\mathbf{a}_z \longrightarrow \mathbf{a}_H = -\mathbf{a}_x$$

$$H_r = -\frac{10}{120\pi} \cos(0.5 \times 10^8 t + z) \mathbf{a}_x \text{ A/m} = -26.53 \cos(0.5 \times 10^8 t + z) \mathbf{a}_x \text{ mA/m}$$

Prob. 10.36 (a)

$$\mathbf{a}_E \cdot \mathbf{a}_H = \mathbf{a}_k \longrightarrow \mathbf{a}_E \cdot \mathbf{a}_z = \mathbf{a}_x \longrightarrow \mathbf{a}_E = -\mathbf{a}_y$$

i.e. polarization is along the y-axis.

(b) $\beta = \omega \sqrt{\mu \epsilon} = \frac{2\pi f}{c} \sqrt{\mu_r \epsilon_r} = \frac{2\pi \times 30 \times 10^6}{3 \times 10^8} \sqrt{4 \times 9} = \underline{\underline{3.77 \text{ rad/m}}}$

(c) $J_d = \nabla \times \mathbf{H} = \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ 0 & 0 & H_z(x, t) \end{vmatrix} = -\frac{\partial H_z}{\partial x} \mathbf{a}_y$

$$= -I \beta \cos(\omega t + \beta x) \mathbf{a}_y = \underline{\underline{-37.6 \cos(\omega t + \beta x) \mathbf{a}_y \text{ mA/m}}}$$

$$(d) \eta_2 = \eta_o, \quad \eta_1 = \eta_o \sqrt{\frac{4}{9}} = \frac{2}{3} \eta_o$$

$$\Gamma = \frac{\eta_2 - \eta_1}{\eta_2 + \eta_1} = 1/5, \quad \tau = I + \Gamma = 6/5$$

$$E_t = 10\eta_1 \sin(\omega t + \beta x) a_E \text{ mV/m}, \quad a_E = -a_y$$

$$E_r = \Gamma 10\eta_1 \sin(\omega t - \beta x)(-a_y) \text{ mV/m}$$

$$a_E x a_H = a_k \rightarrow -a_y x a_H = a_x \rightarrow a_H = -a_z$$

$$H_r = \Gamma 10 \sin(\omega t - \beta x)(-a_z) \text{ mA/m} = \underline{\underline{2 \sin(\omega t - \beta x) a_z \text{ mA/m}}}$$

$$E_t = \tau 10\eta_1 \sin(\omega t + \beta x)(-a_y) \text{ mV/m}$$

$$a_E x a_H = a_k \rightarrow -a_y x a_H = -a_x \rightarrow a_H = a_z$$

$$H_t = 10(6/5)(\eta_1/\eta_2) \sin(\omega t + \beta x) a_z \text{ mA/m} = \underline{\underline{8 \sin(\omega t + \beta x) a_z \text{ mA/m}}}$$

$$(e) \quad \mathcal{P}_{ave1} = \frac{E_{io}^2}{2\eta_1} (-a_x) + \frac{E_{ro}^2}{2\eta_1} (+a_x) = \frac{-E_{io}^2}{2\eta_1} (I - \Gamma^2) a_x$$

$$= -\frac{\eta_1^2 H_{io}^2}{2\eta_1} (I - \Gamma^2) a_x = -\frac{1}{3} \eta_o 100 (1 - \frac{1}{25}) a_x = \underline{\underline{-0.012064 a_x \text{ W/m}^2}}$$

$$E_{ot} = \tau E_{oi} = \tau \eta_1 H_{io}$$

$$\mathcal{P}_{ave2} = \frac{E_{io}^2}{2\eta_2} (-a_x) = \frac{\tau^2 \eta_1^2 H_{io}^2}{2\eta_2} (-a_x) = 32 \eta_o (-a_x) \mu \text{W/m}^2 = \underline{\underline{-0.012064 a_x \text{ W/m}^2}}$$

Prob. 10.37 (a) In air, $\beta_1 = I, \lambda_1 = 2\pi/\beta_1 = 2\pi = \underline{\underline{6.283 \text{ m}}}$

$$\omega = \beta_1 c = \underline{\underline{3 \times 10^8 \text{ rad/s}}}$$

In the dielectric medium, ω is the same.

$$\omega = \underline{\underline{3 \times 10^8 \text{ rad/s}}}$$

$$\beta_2 = \frac{\omega}{c} \sqrt{\epsilon_{r2}} = \beta_1 \sqrt{\epsilon_{r2}} = \sqrt{3}$$

$$\lambda_2 = \frac{2\pi}{\beta_2} = \frac{2\pi}{\sqrt{3}} = \underline{\underline{3.6276 \text{ m}}}$$

$$(b) \quad H_o = \frac{E_o}{\eta_o} = \frac{10}{120\pi} = 0.0265$$

$$a_H = a_k x a_E = a_z x a_y = a_x$$

$$H_i = \underline{\underline{-26.5 \cos(\omega t - z)a_x \text{ mA/m}}}$$

$$(c) \quad \eta_1 = \eta_o, \quad \eta_2 = \eta_o / \sqrt{3}$$

$$\Gamma = \frac{\eta_2 - \eta_1}{\eta_2 + \eta_1} = \frac{(1/\sqrt{3}) - 1}{(1/\sqrt{3}) + 1} = \underline{\underline{-0.268}}, \quad \tau = I + \Gamma = \underline{\underline{0.732}}$$

$$(d) \quad E_{io} = \tau E_{ro} = 7.32, \quad E_{ro} = \Gamma E_{io} = -2.68$$

$$E_i = E_i + E_r = \underline{\underline{10 \cos(\omega t - z)a_y - 2.68 \cos(\omega t + z)a_y \text{ V/m}}}$$

$$E_2 = E_i = \underline{\underline{7.32 \cos(\omega t - z)a_y \text{ V/m}}}$$

$$\mathcal{P}_{ave1} = \frac{I}{2\eta_1} (a_z) [E_{io}^2 - E_{ro}^2] = \frac{I}{2(120\pi)} (a_z) (10^2 - 2.68^2) = \underline{\underline{0.1231a_z \text{ W/m}^2}}$$

$$\mathcal{P}_{ave2} = \frac{E_{io}^2}{2\eta_2} (a_z) = \frac{\sqrt{3}}{2 \times 120\pi} (7.32)^2 (a_z) = \underline{\underline{0.1231a_z \text{ W/m}^2}}$$

$$\text{Prob. 10.38 (a)} \quad \omega = \beta c = 3 \times 3 \times 10^8 = \underline{\underline{9 \times 10^8 \text{ rad/s}}}$$

$$(b) \quad \lambda = 2\pi / \beta = 2\pi / 3 = \underline{\underline{2.094}}$$

$$(c) \quad \frac{\sigma}{\omega \epsilon} = \frac{4}{9 \times 10^8 \times 80 \times 10^{-9} / 36\pi} = 2\pi = \underline{\underline{6.288}}$$

$$\tan 2\theta_n = \frac{\sigma}{\epsilon \epsilon} = 6.288 \quad \longrightarrow \quad \theta_n = 40.47^\circ$$

$$= \frac{2\cos\theta_i \sin\theta_i}{(\sin\theta_i \cos\theta_i + \sin\theta_i \cos\theta_i)(\cos\theta_i \cos\theta_i + \sin\theta_i \sin\theta_i)}$$

$$= \frac{2\cos\theta_i \sin\theta_i}{\sin(\theta_i + \theta_i) \cos(\theta_i - \theta_i)}$$

$$\Gamma_1 = \frac{\frac{I}{\sqrt{\epsilon_{r2}}} \cos\theta_i - \frac{I}{\sqrt{\epsilon_{r1}}} \cos\theta_i}{\frac{I}{\sqrt{\epsilon_{r2}}} \cos\theta_i + \frac{I}{\sqrt{\epsilon_{r1}}} \cos\theta_i} = \frac{\cos\theta_i - \frac{\sin\theta_i}{\sin\theta_i} \cos\theta_i}{\cos\theta_i + \frac{\sin\theta_i}{\sin\theta_i} \cos\theta_i} = \frac{\sin(\theta_i - \theta_i)}{\sin(\theta_i + \theta_i)}$$

$$\tau_1 = \frac{\frac{2}{\sqrt{\epsilon_{r2}}} \cos\theta_i}{\frac{I}{\sqrt{\epsilon_{r2}}} \cos\theta_i + \frac{I}{\sqrt{\epsilon_{r1}}} \cos\theta_i} = \frac{2\cos\theta_i}{\cos\theta_i + \frac{\sin\theta_i}{\sin\theta_i} \cos\theta_i} = \frac{2\cos\theta_i \sin\theta_i}{\sin(\theta_i + \theta_i)}$$

Prob. 10.43 (a) $k_i = 4a_y + 3a_z$


$$k_i \cdot a_n = k_i \cos\theta_i \quad \longrightarrow \quad \cos\theta_i = 4/5 \quad \longrightarrow \quad \underline{\theta_i = 36.87^\circ}$$

(b)

$$\mathcal{P}_{\text{ave}} = \frac{I}{2} \operatorname{Re}(E_s \times H_s^*) = \frac{E_o^2}{2\eta} a_k = \frac{(\sqrt{8^2 + 6^2})^2}{2 \times 120\pi} \frac{(3a_y + 4a_z)}{5} = \underline{79.58a_y + 106.1a_z \text{ mW/m}^2}$$

(c) $\theta_r = \theta_i = 36.87^\circ$. Let

$$E_r = (E_{ry}a_x + E_{rz}a_z) \sin(\omega t - k_r \cdot r)$$

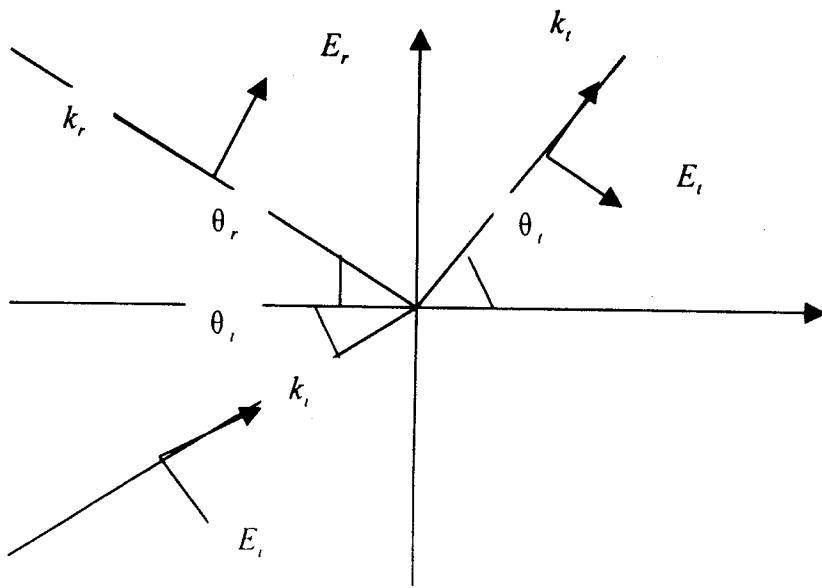

$$\tau_{\text{in}} = \frac{E_{io}}{E_{ro}} = \frac{2\eta_2 \cos\theta_i}{\eta_2 \cos\theta_i + \eta_o \cos\theta_i} = \frac{\eta_o(0.8)}{\frac{\eta_o}{2}(0.9539) + \eta_o(0.8)} = 0.6265$$

$$E_{ro} = \tau_{\text{in}} E_{io} = 0.265$$

But

$$(E_{ry}a_y + E_{rz}a_z) = E_{ro}(\sin\theta_i a_y - \cos\theta_i a_z) = 0.256(0.3a_y - 0.9539a_z)$$

Hence,

$$E_t = (1.877a_y - 5.968a_z) \sin(\omega t - 9.539y - 3z) \text{ V/m}$$

Prob. 10.44 (a)

$$\tan\theta_i = \frac{k_{rx}}{k_{rz}} = \frac{l}{\sqrt{8}} \longrightarrow \underline{\theta_i = \theta_r = 19.47^\circ}$$

$$\sin\theta_i = \sin\theta_r \sqrt{\frac{\epsilon_{rl}}{\epsilon_{r2}}} = \frac{l}{3}(3) = l \longrightarrow \underline{\theta_i = 90^\circ}$$

$$(b) \quad \beta_i = \frac{\omega}{c} \sqrt{\epsilon_{ri}} = \frac{10^9}{3 \times 10^8} \times 3 = 10 = k \sqrt{l+8} = 3k \longrightarrow \underline{k = 3.333}$$

$$(c) \quad \lambda = 2\pi/\beta_i, \quad \lambda_i = 2\pi/\beta_i = 2\pi/10 = \underline{0.6283} \text{ m}$$

$$\beta_2 = \omega/c = 10/3, \quad \lambda_2 = 2\pi/\beta_2 = 2\pi \times 3/10 = \underline{1.885} \text{ m}$$

$$(d) \quad E_t = \eta_i a_k x H_t = 40\pi \frac{(a_x + \sqrt{8}a_z)}{3} x 0.2 \cos(\omega t - k \bullet r) a_y \\ = (-213.3a_x + 75.4a_z) \cos(10^9 t - kx - k\sqrt{8}z) \text{ V/m}$$

$$(e) \quad \tau_{\text{in}} = \frac{2\cos\theta_i \sin\theta_i}{\sin(\theta_i + \theta_r) \cos(\theta_i - \theta_r)} = \frac{2\cos 19.47^\circ \sin 90^\circ}{\sin 19.47^\circ \cos 19.47^\circ} = 6$$

$$\Gamma_i = -\frac{\cot 19.47^\circ}{\cot 19.47^\circ} = -1$$

$$\text{Let } E_t = -E_{ro}(\cos\theta_i a_x - \sin\theta_i a_z) \cos(10^9 t - \beta_2 x \sin\theta_i - \beta_2 z \cos\theta_i)$$

where

$$E_r = -E_{\omega}(\cos\theta_r a_x - \sin\theta_r a_z) \cos(10^9 t - \beta_r x \sin\theta_r - \beta_r z \cos\theta_r)$$

$$\sin\theta_r = 1, \quad \cos\theta_r = 0, \quad \beta_r \sin\theta_r = 10/3$$

$$E_{\omega} \sin\theta_r = \tau, \quad E_{\omega} = 6(24\pi)(3)(1) = 1357.2$$

Hence,

$$E_r = 1357 \cos(10^9 t - 3.333x) a_z \text{ V/m}$$

$$\text{Since } \Gamma = -1, \quad \theta_r = \theta_r$$

$$E_r = (213.3 a_x + 75.4 a_z) \cos(10^9 t - kx + k\sqrt{8}z) \text{ V/m}$$

$$(f) \quad \tan\theta_{BII} = \sqrt{\frac{\epsilon_2}{\epsilon_1}} = \sqrt{\frac{\epsilon_o}{9\epsilon_o}} = 1/3 \quad \longrightarrow \quad \underline{\theta_{BII} = 18.43^\circ}$$

Prob. 10.45

$$\beta_r = \sqrt{3^2 + 4^2} = 5 = \omega/c \quad \longrightarrow \quad \underline{\omega = \beta_r c = 15 \times 10^8 \text{ rad/s}}$$

Let $E_r = (E_{ox}, E_{oy}, E_{oz}) \sin(\omega t + 3x + 4y)$. In order for

$$\nabla \cdot E_r = 0, \quad 3E_{ox} + 4E_{oy} = 0 \quad (I)$$

Also, at $y=0$, $E_{1tan} = E_{2tan} = 0$

$$E_{1tan} = 0, \quad 8a_x + 5a_z + E_{ox}a_x + E_{oz}a_z = 0$$

Equating components, $E_{ox} = -8$, $E_{oz} = -5$

$$\text{From (1), } 4E_{oy} = -3E_{ox} = 24 \quad E_{oy} = 6$$

Hence,

$$E_r = (-8a_x + 6a_y - 5a_z) \sin(15 \times 10^8 t + 3x + 4y) \text{ V/m}$$

Prob. 10.46 Since both media are nonmagnetic,

$$\tan \theta_{BII} = \sqrt{\frac{\epsilon_2}{\epsilon_1}} = \sqrt{\frac{2.6\epsilon_o}{\epsilon_o}} = 1.612 \quad \longrightarrow \quad \theta_{BII} = 58.19^\circ$$

But

$$\cos \theta_t = \frac{\eta_1}{\eta_2} \cos \theta_{BII} = \frac{\eta_o}{\eta_o / \sqrt{2.6}} \cos \theta_{BII} = \sqrt{2.6} \cos 58.19^\circ \quad \longrightarrow \quad \underline{\underline{\theta_t = 31.8^\circ}}$$

CHAPTER 11

P.E. 11.1 Since Z_o is real and $\alpha \neq 0$, this is a distortionless line.

$$Z_o = \sqrt{\frac{R}{G}} \quad (1)$$

$$\text{or } \frac{L}{R} = \frac{C}{G} \quad (2)$$

$$\alpha = \sqrt{RG} \quad (3)$$

$$\beta = \omega L \sqrt{\frac{G}{R}} = \frac{\omega L}{Z} \quad (4)$$

$$(1) \times (3) \rightarrow R_o = \alpha Z_o = 0.04 \times 80 = \underline{\underline{3.2 \Omega / m}},$$

$$(3) \div (1) \rightarrow G = \frac{\alpha}{Z_o} = \frac{0.04}{80} = \underline{\underline{5 \times 10^{-4} \Omega / m}}$$

$$L = \frac{\beta Z_o}{\omega} = \frac{1.5 \times 80}{2\pi \times 5 \times 10^8} = \underline{\underline{38.2 \text{ nH/m}}}$$

$$C = \frac{LG}{R} = \frac{12}{\pi} \cdot 10^{-8} \times \frac{0.04}{80} \times \frac{1}{0.04 \times 80} = \underline{\underline{5.97 \text{ pF/m}}}$$

P.E. 11.2

$$(a) Z_o = \sqrt{\frac{R + j\omega L}{G + j\omega C}} = \sqrt{\frac{0.03 + j2\pi \times 0.1 \times 10^{-3}}{0 + j2\pi \times 0.02 \times 10^{-6}}}$$

$$= 70.73 - j1.688 = \underline{\underline{70.75 \angle -1.367^\circ \Omega}}$$

$$(b) \gamma = \sqrt{(R + j\omega L)(G + j\omega C)} = \sqrt{(0.03 + j0.2\pi)(j0.4 \times 10^{-4}\pi)}$$

$$= \underline{\underline{2.121 \times 10^{-4} + j8.888 \times 10^{-3} / m}}$$

$$(c) u = \frac{w}{\beta} = \frac{2\pi \times 10^3}{8.888 \times 10^{-3}} = \underline{\underline{7.069 \times 10^5 \text{ m/s}}}$$

P.E. 11.3

$$(a) Z_o = Z_l \rightarrow Z_m = Z_o = \underline{\underline{30 + j60 \Omega}}$$

$$(b) V_m = V_o = \frac{Z_m}{Z_m + Z_o} V_g = \frac{V_g}{2} = \underline{\underline{7.5 \angle 0^\circ \text{ V}_{\text{rms}}}}$$

$$I_m = I_o = \frac{V_g}{Z_g + Z_m} = \frac{V_g}{2Z_o} = \frac{15 \angle 0^\circ}{2(30 + j60^\circ)}$$

$$= \underline{\underline{0.05 \angle -63.43^\circ A}}$$

(c) Since $Z_o = Z_r$, $\Gamma = 0 \rightarrow V_o^- = 0, V_o^+ = V_o$

The load voltage is $V_L = V_s(z = l) = V_o^+ e^{-\gamma l}$

$$e^{-\gamma l} = \frac{V_o^+}{V_L} = \frac{7.5 \angle 0^\circ}{5 \angle -48^\circ} 1.5 \angle 48^\circ$$

$$e^{\alpha l} e^{\beta l} = 1.5 \angle 48^\circ$$

$$e^{\alpha l} = 1.5 \rightarrow \alpha = \frac{l}{l} \ln(1.5) = \frac{l}{40} \ln(1.5) = 0.0101$$

$$e^{\beta l} = e^{j48^\circ} \rightarrow \beta = \frac{l}{l} \frac{48^\circ}{180^\circ} \pi \text{ rad} = 0.02094$$

$$\underline{\underline{\gamma = 0.0101 + j0.2094 / \text{m}}}$$

P.E. 11.4


(a) Using the Smith chart, locate S at $s = 1.6$. Draw a circle of radius OS. Locate P where $\theta_\Gamma = 300^\circ$. At P,

$$|\Gamma| = \frac{OP}{OQ} = \frac{2.1 \text{ cm}}{9.2 \text{ cm}} = 0.228$$

$$\underline{\underline{\Gamma = 0.228 \angle 300^\circ}}$$

Also at P, $\underline{\underline{Z_L = 1.15 - j0.48}}$,

$$Z_L = Z_o Z_L = 70(1.15 - j0.48) = \underline{\underline{80.5 - j33.6 \Omega}}$$



$$l = 0.6\lambda \rightarrow 0.6 \times 720^\circ = 432^\circ = \underline{\underline{360^\circ + 73^\circ}}$$

From P, move 432° to R. At R, $z_m = 0.68 - j0.25$

$$Z_m = Z_o Z_m = 70(0.68 - j0.25) = \underline{\underline{47.6 - j17.5\Omega}}$$

- (b) The maximum voltage (the only one) occurs at $\theta_\Gamma = 180^\circ$; its distance from the load is $\frac{180 - 60}{720} \lambda = \frac{\lambda}{6} = \underline{\underline{0.1667\lambda}}$

P.E. 11.5

$$(a) \Gamma = \frac{Z_L - Z_o}{Z_L + Z_o} = \frac{60 + j60 - 60}{60 + j60 + 60} = \frac{j}{2+j} = \underline{\underline{0.4472 \angle 63.43^\circ}}$$

$$s = \frac{1 + |\Gamma|}{1 - |\Gamma|} = \frac{1 + 0.4472}{1 - 0.4472} = \underline{\underline{2.618}}$$

$$\text{Let } x = \tan(\beta l) = \tan \frac{2\pi l}{\lambda}$$

$$Z_m = Z_o \left[\frac{Z_L + jZ_o \tan(\beta l)}{Z_o + jZ_L \tan(\beta l)} \right]$$

$$120 - j60 = 60 \left[\frac{60 + j60 + j60x}{60 + j(60 + j60)x} \right]$$

$$\text{Or } 2 - j = \frac{1 + j(1+x)}{1 - x + jx} \rightarrow 1 - x + j(2x - 2) = 0$$

$$\text{Or } x = l = \tan(\beta l)$$

$$\frac{\pi}{4} + n\pi = \frac{2\pi l}{\lambda}$$

$$\text{i.e. } l = \frac{\lambda}{8}(1 + 4n), n = 0, 1, 2, 3, \dots$$

$$(b) Z_L = \frac{Z_L}{Z_o} \frac{60 + j60}{60} = 1 + j$$

Locate the load point P on the Smith chart.

$$|\Gamma| = \frac{OP}{OQ} = \frac{4.1cm}{9.2cm} = 0.4457, \theta_\Gamma = 62^\circ$$

$$\Gamma = 0.4457 \angle 62^\circ$$


Locate the point S on the Smith chart. At S, r = s = 2.6

P.E. 11.8


$$(a) \quad \Gamma_G = \frac{1}{3}, \quad \Gamma_L = z_L \xrightarrow{\lim} 0 \quad \frac{Z_L - Z_o}{Z_L + Z_o} = -I$$

$$V_x = z_L \xrightarrow{\lim} 0 \quad \frac{Z_L}{Z_L + Z_g} V_g = 0, \quad I_x = z_L \xrightarrow{\lim} 0 \quad \frac{V_g}{Z_g + Z_g} = \frac{V_g}{Z_g} = \frac{12}{100} = 120mA$$



Thus the bounce diagrams for current and waves are as shown below.

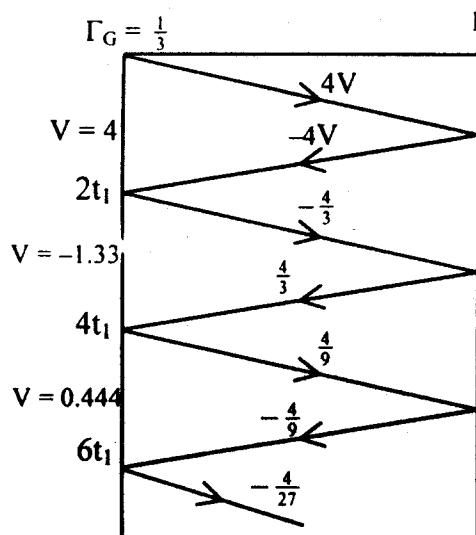


(Voltage)

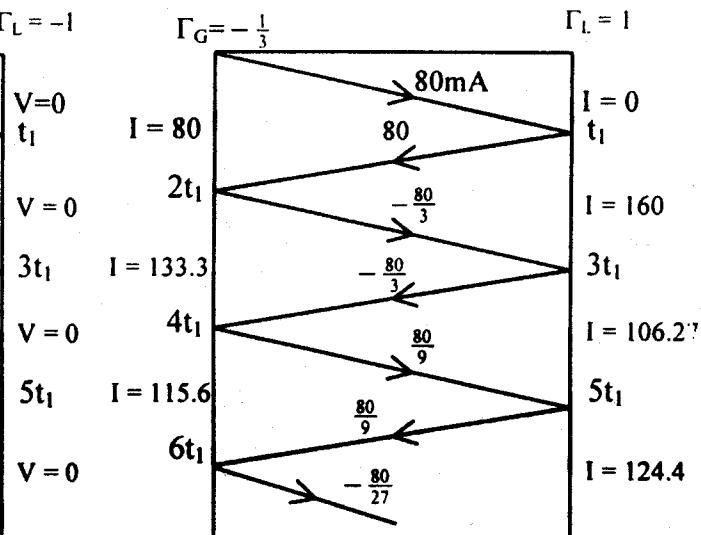

(Current)

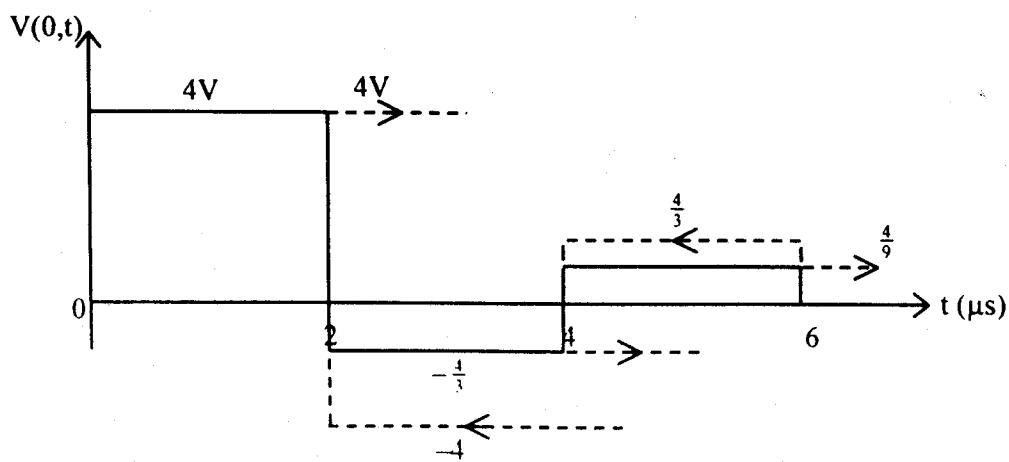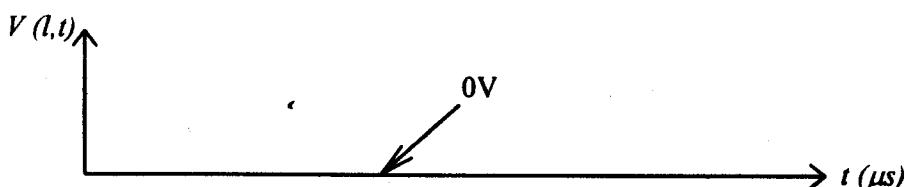





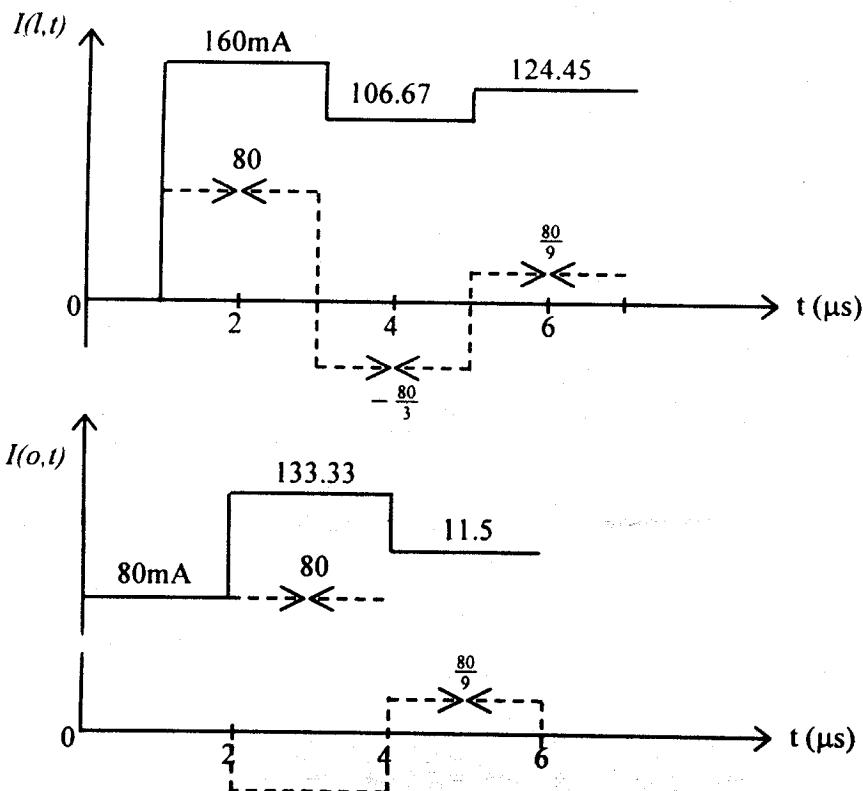


$$(b)) \quad \Gamma_G = \frac{1}{3}, \quad \Gamma_L = z_L \xrightarrow{\lim} \infty \quad \frac{Z_L - Z_o}{Z_L + Z_o} = 1$$

$$V_x = z_L \xrightarrow{\lim} \infty \quad \frac{Z_L}{Z_L + Z_g} V_g = V_g = 12V, \quad I_x = z_L \xrightarrow{\lim} \infty \quad \frac{V_g}{Z_L + Z_g} = 0$$

The bounce diagrams for current and voltage waves are as shown below.

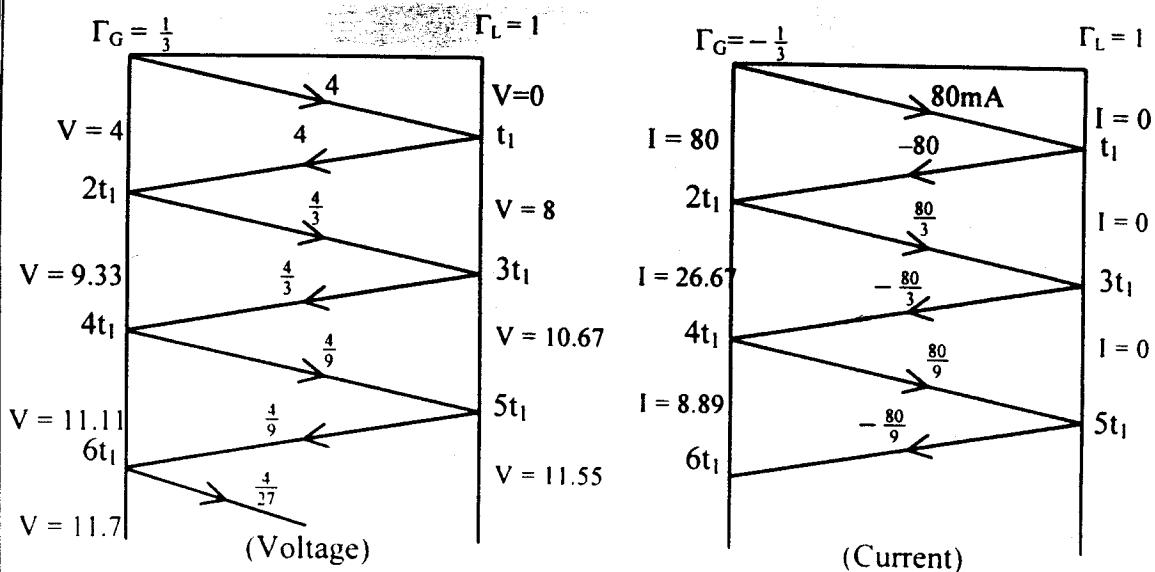

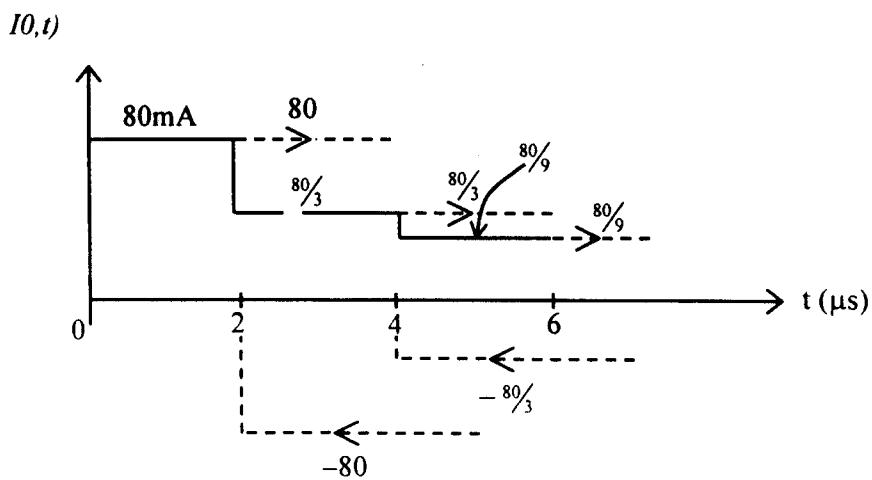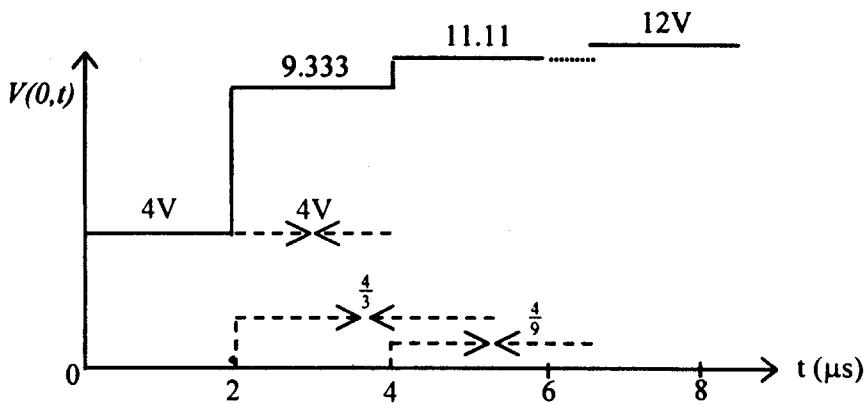
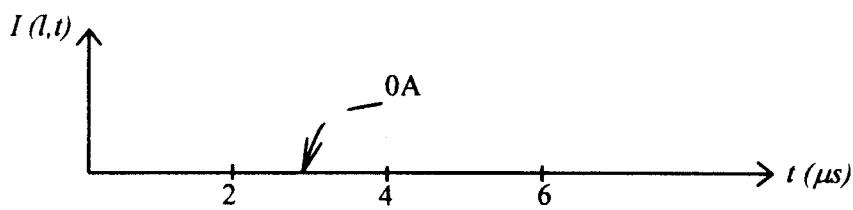
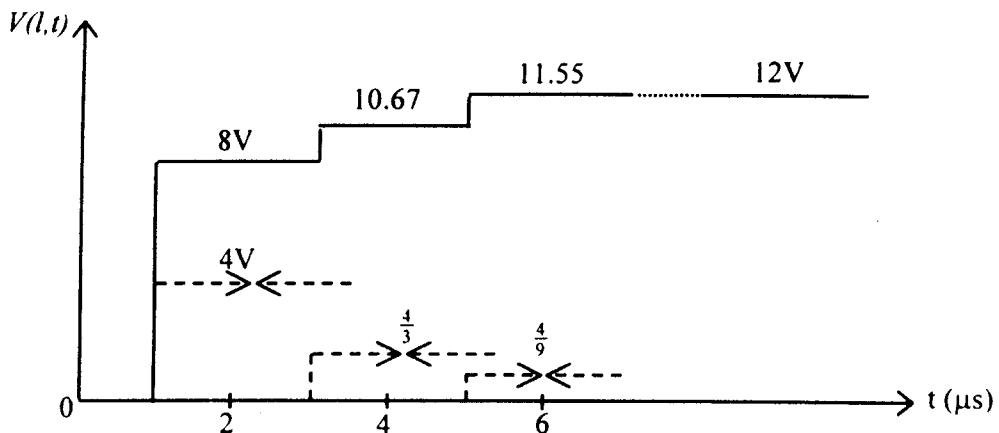


P.E. 11.9

$$\Gamma_a = -\frac{1}{2}, \Gamma_L = \frac{1}{7}, t_L = 2\mu s$$

$$(I_o)_{\max} = \frac{(V_g)_{\max}}{Z_g + Z_o} = \frac{10}{100} = 100mA$$

The bounce diagrams for maximum current are as shown below.

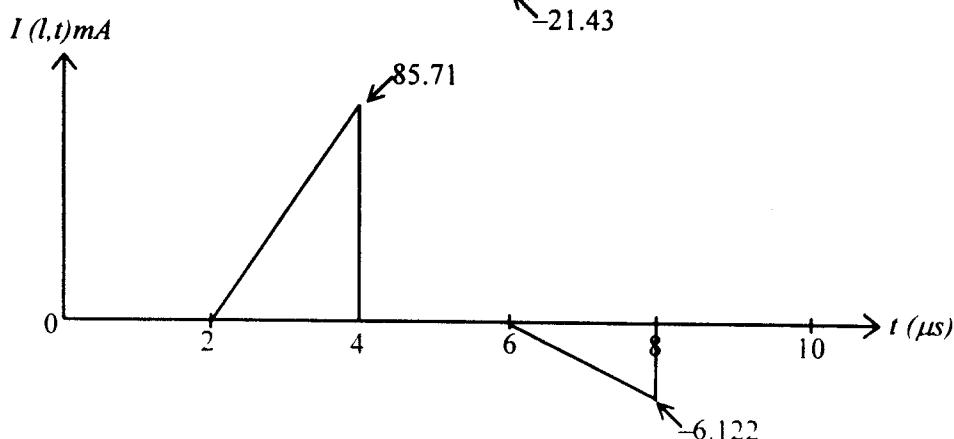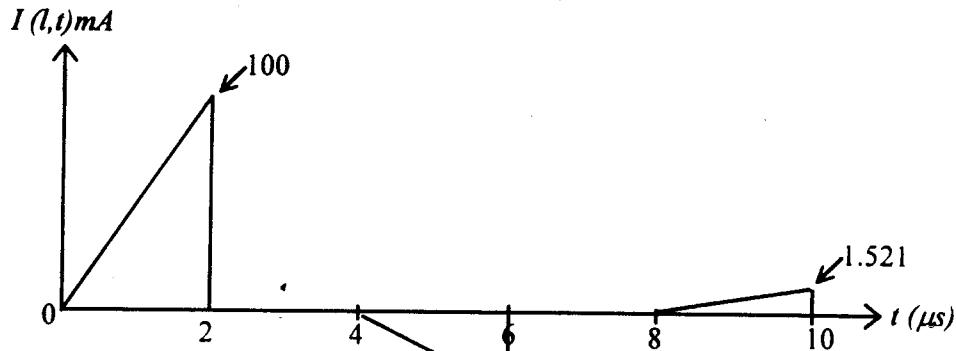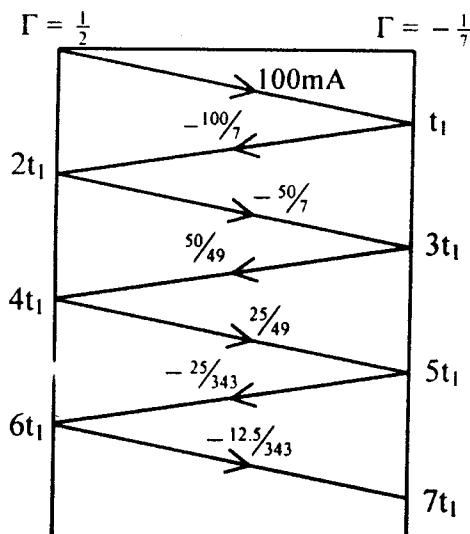

P.E. 11.10

$$(a) \text{ For } w/h = 0.8, \quad \epsilon_{\text{eff}} = \frac{4.8}{2} + \frac{2.8}{2} \left[1 + \frac{12}{0.8} \right]^{-\frac{1}{2}} = \underline{\underline{2.75}}$$

$$(b) Z_o = \frac{60}{\sqrt{2.75}} \ln \left(\frac{8}{0.8} + \frac{0.8}{4} \right) = 36.18 \ln 10.2 = \underline{\underline{84.03 \Omega}}$$

$$(c) \lambda = \frac{3 \times 10^8}{10^{10} \sqrt{2.75}} = \underline{\underline{18.09 \text{ mm}}}$$

P.E. 11.11

$$R_s = \sqrt{\frac{\pi f \mu_0}{\sigma_c}} = \sqrt{\frac{\pi \times 20 \times 10^9 \times 4\pi \times 10^{-7}}{5.8 \times 10^7}} \\ = 3.69 \times 10^{-2}$$

$$\alpha_c = 8.685 \frac{R_s}{wZ_o} = \frac{8.686 \times 3.69 \times 10^{-2}}{2.5 \times 10^{-3} \times 50} \\ = \underline{\underline{2.564 \text{ dB/m}}}$$

Prob. 11.1

$$\delta = \frac{l}{\sqrt{\pi F \mu \sigma}} = \frac{l}{\sqrt{\pi \times 5 \times 10^7 \times 4\pi \times 10^{-7} \times 6 \times 10^7}}$$

$$\delta = 9.19 \times 10^{-6}$$

$$R = \frac{2}{w \delta \sigma_c} = \frac{2}{0.3 \times 9.19 \times 10^{-6} \times 7 \times 10^7} = \underline{\underline{0.0104 \Omega / \text{m}}}$$

$$L = \frac{\mu_0 d}{w} = \frac{4\pi \times 10^{-7} \times 1.2 \times 10^{-2}}{0.3} = \underline{\underline{50.26 \text{ nH/m}}}$$

$$C = \frac{\epsilon_0 w}{d} = \frac{10^{-9}}{36\pi} \times \frac{0.3}{1.2 \times 10^{-2}} = \underline{\underline{221 \text{ pF/m}}}$$

Since $\sigma = 0$ for air,

$$G = \frac{\sigma w}{d} = 0$$

Prob. 11.2

$$C = \frac{\pi \epsilon l}{\cosh^{-1}(d/2a)} \approx \frac{\pi \epsilon l}{\ln(d/a)}$$

since $(d/2a)^2 = 11.11 \gg 1$.

$$C = \frac{\pi x \frac{10^{-9}}{36\pi} x 16 x 10^{-3}}{\ln(2/0.3)} = \underline{0.2342 \text{ pF}}$$

$$\delta = \frac{l}{\sqrt{\pi f \mu \sigma}} = \frac{l}{\sqrt{\pi x 10^7 x 4 \pi x 10^{-7} x 5.8 x 10^7}} = 2.09 x 10^{-5} \text{ m} \ll a$$


$$R_{ac} = \frac{l}{\pi a \delta \sigma} = \frac{16 x 10^{-3}}{\pi x 0.3 x 10^{-3} x 2.09 x 10^{-5} x 5.8 x 10^7} = \underline{1.5 x 10^{-2} \Omega}$$

Prob. 11.3

(a) Applying Kirchhoff's voltage law to the loop yields

$$V(z + \Delta z, t) + V(z, t) - R\Delta z I_I - L\Delta z \frac{\partial I_I}{\partial t}$$

$$\text{But } I_I = I(z, t) - \frac{C}{2} \Delta z \frac{\partial V(z, t)}{\partial t} - \frac{G}{2} \Delta t V(z, t)$$



Hence,

$$V(z + \Delta z, t) = V(z, t) - R\Delta z \left[I(z, t) - \frac{C}{2} \Delta z \frac{\partial V}{\partial t} - \frac{G}{2} \Delta z V \right] - L\Delta z \left[\frac{\partial I}{\partial t} - \frac{C}{2} \Delta z \frac{\partial^2 V}{\partial t^2} - \frac{G}{2} \Delta z \frac{\partial V}{\partial t} \right]$$

Dividing by Δz and taking limits as $\Delta t \rightarrow 0$ give

$$\lim_{\Delta z \rightarrow 0} \frac{V(z + \Delta z, t) - V(z, t)}{\Delta z} = \lim_{\Delta z \rightarrow 0} \left[-RI - L \frac{\partial I}{\partial t} + \frac{RC}{2} \Delta z \frac{\partial V}{\partial t} + \frac{RG}{2} \Delta z V + \frac{LC}{2} \Delta z \frac{\partial^2 V}{\partial t^2} + \frac{LG}{2} \Delta z \frac{\partial V}{\partial t} \right]$$

$$\text{or } -\frac{\partial V}{\partial z} = RL + L \frac{\partial I}{\partial t}$$

Similarly, applying Kirchhoff's law to the node leads to

$$Z_o = \sqrt{\frac{L}{C}} = \sqrt{\frac{0.655 \times 10^{-6}}{59.4 \times 10^{-12}}} = \underline{\underline{105.8 \Omega}}$$

or

$$Z_o = \frac{120}{\sqrt{3.5}} \cosh^{-1} 2.667 = \underline{\underline{105 \Omega}}$$

Prob. 11.9

Since $R = 0 = G$,

$$-\frac{\partial V}{\partial t} = L \frac{\partial I}{\partial t} \quad (1)$$

$$-\frac{\partial I}{\partial t} = C \frac{\partial V}{\partial t} \quad (2)$$

If $V = V_o \sin(\omega t - \beta z)$, from (1)

$$-\frac{\partial I}{\partial t} = V_o \beta \cos(\omega t - \beta z),$$

$$I = \frac{V_o}{L} \beta \cos(\omega t - \beta z)$$

Using (2)

$$\frac{V_o}{wL} \beta^2 \cos(\omega t - \beta z) = wC V_o \cos(\omega t - \beta z)$$

i.e. $\frac{\beta^2}{wL} = wC \rightarrow \beta = w\sqrt{Lc}$

But $Z_o = \sqrt{\frac{L}{C}}$, hence $Z_o = \frac{wL}{\beta}$ and $I_o = \frac{V_o}{Z_o} \sin(\omega t - \beta z)$

Prob. 11.10

(a) $\alpha = 0.0025 \text{ Np/m}$, $\beta = 2 \text{ rad/m}$,

$$u = \frac{\omega}{\beta} = \frac{10^8}{2} = \underline{\underline{5 \times 10^7 \text{ m/s}}}$$

$$(b) \Gamma = \frac{V_o}{V_s} = \frac{60}{120} = \frac{1}{2}$$

But $\Gamma = \frac{Z_L - Z_o}{Z_L + Z_o} \rightarrow \frac{1}{2} = \frac{300 - Z_o}{300 + Z_o} \rightarrow Z_o = \underline{\underline{100 \Omega}}$

$$\begin{aligned}
 I(l) &= \frac{120}{Z_o} e^{0.0025l} \cos(10^8 + 2l) - \frac{60}{Z_o} e^{-0.0025l} \cos(10^8 t - zl) \\
 &= 0.12 e^{0.0025l} \cos(10^8 + 2l) - 0.6 e^{-0.0025l} \cos(10^8 t - zl) A
 \end{aligned}$$

Prob. 11.11

$$\begin{aligned}
 (a) \quad T_L &= \frac{V_L}{V_o^+} = \frac{Z_L I_L}{I/2(V_L + Z_o I_L)} = \frac{2Z_L I_L}{Z_L I_2 + Z_o I_2} \\
 &= \frac{Z_L I_L}{Z_L + Z_o}
 \end{aligned}$$

$$I + T_L = I + \frac{Z_L - Z_o}{Z_L + Z_o} = \frac{2Z_L}{Z_L + Z_o}$$

$$(b) \quad (i) \quad T_L = \frac{Z_n Z_o}{n Z_o + Z_o} = \frac{Z_n}{Z_n + 1}$$

$$(ii) \quad T_L =_{Z_L} \xrightarrow{\lim} 0 = \frac{2}{I + Z_o/Z_L} = 2$$

$$(iii) \quad T_L =_{Z_L} \xrightarrow{\lim} 0 = \frac{2Z_L}{Z_L + Z_o} = 0$$

$$(iv) \quad T_L = \frac{2Z_o}{2Z_o} = 1$$

Prob. 11.12


$$R + j\omega L = 6.5 + j2\pi \times 2 \times 10^6 \times 3.4 \times 10^{-6} = 6.5 + j42.73$$

$$R + j\omega C = 8.4 \times 10^{-3} + j2\pi \times 2 \times 10^6 \times 21.5 \times 10^{-12} = (8.4 + j0.27) \times 10^{-3}$$

$$Z_o = \sqrt{\frac{R + j\omega L}{G + j\omega C}} = \sqrt{\frac{6.5 + j42.73}{(8.4 + j0.27) \times 10^{-3}}}$$

$$Z_o = 71.71 \angle 39.75^\circ = \underline{55.12 + j45.85 \Omega}$$

$$\begin{aligned}
 \gamma &= \sqrt{(R + j\omega L)(G + j\omega C)} &= \sqrt{(43.19 \angle 81.34^\circ)(8.4 \times 10^{-3} \angle 1.84^\circ)} \\
 &= 0.45 + j0.39/\text{m}
 \end{aligned}$$



 α β

$$t = \frac{l}{u}, \text{ but } u = \frac{w}{\beta},$$

$$t = \frac{\beta l}{\omega} = \frac{0.39 \times 5.6}{2\pi \times 2 \times 10^6} = \underline{\underline{0.1738 \mu s}}$$

Prob.11.13

$$Z_o = \sqrt{\frac{L}{c}}, \gamma = j\beta = j\omega \sqrt{Lc}$$

$$Z_o \beta = \omega L \rightarrow \beta = \frac{\omega L}{Z_o} = \frac{2\pi \times 4.5 \times 10^9 \times 2.4 \times 10^6}{85}$$

$$= \underline{\underline{798.33 \text{ rad/m}}}$$

$$u = \frac{\omega}{\beta} = \frac{Z_o}{L} = \frac{85}{2.4 \times 10^{-6}} = \underline{\underline{3.542 \times 10^7 \text{ m/s}}}$$

Prob. 11.14

$$\Gamma_L = \frac{Z_L - Z_o}{Z_L + Z_o} = \frac{75 + j25 - 50}{75 + j25 + 50} = \underline{\underline{0.2773 \angle 33.69^\circ}}$$

$$s = \frac{1 + |\Gamma|}{1 - |\Gamma|} = \frac{1.2773}{0.7227} = \underline{\underline{1.767}}$$

Prob. 11.15

From eq. (11.33)

$$Z_{sc} = Z_{in} \Big|_{Z_L=0} = \tanh \gamma l$$

$$Z_{oc} = Z_{in} \Big|_{Z_L=\infty} = \frac{Z_o}{\tanh \gamma l} = Z_o \coth(\gamma l)$$

For lossless line, $\gamma = j\beta, \tan(\gamma l) = \tanh(j\beta l) = j \tan(\beta l)$

$$Z_{sc} = jZ_o \tan(\beta l), Z_{oc} = -jZ_o \cot(\beta l)$$

Prob. 11.16

$$Z_{in} = Z_{sc} = Z_o \tan \gamma l = Z_o \frac{\sinh(\gamma l)}{\cosh(\gamma l)}$$

$$\text{But } \gamma l = (0.7 + j2.5)(0.8) = 0.56 + j2$$

Prob. 11.18

$$Z_L = \frac{Z_L}{Z_o} = \frac{210}{100} = 2.1 = s$$

$$\text{Or } \Gamma = \frac{Z_L - Z_o}{Z_L + Z_o} = \frac{110}{310},$$

$$s = \frac{1 + |\Gamma|}{1 - |\Gamma|} = 2 - 1$$

$$\text{But } s = \frac{V_{\max}}{V_{\min}} \rightarrow V_{\max} = s V_{\min}$$

Since the line is $\frac{\lambda}{4}$ long, $\frac{\lambda}{4} \rightarrow \frac{720^\circ}{4} = 120^\circ$

Hence the sending end will be V_{\min} ,

while the receiving end at V_{\max}

$$V_{\max} = s V_{\min} = 1.2 \times 80 = \underline{\underline{96V}}$$

Prob. 11.19

$$I_L = \frac{V_L}{Z_L}, \Gamma = \frac{Z_L - Z_o}{Z_L + Z_o} = \frac{50e^{j30^\circ} - 50}{50e^{j30^\circ} + 50} \\ \approx j0.2679$$


From eq.(11.30),

$$V_o^+ = \frac{1}{2}(V_L + Z_o \cdot \frac{V_L}{Z_L})e^{j\theta} = \frac{V_L}{2Z_L}(Z_L + Z_o)e^{j\theta}$$

$$V_o^- = \frac{V_L}{2Z_L}(Z_L - Z_o)e^{-j\theta}$$

Substituting these in eq.(11.25),

$$I_s = \frac{V_L}{2Z_L Z_o} [(Z_L + Z_o)e^{j\theta} e^{-j\pi} - (Z_L - Z_o)e^{-j\theta} e^{j\pi}] \\ = \frac{V_L}{1 + \Gamma} [e^{-j\gamma(z-l)} - \Gamma e^{j\gamma(z-l)}]$$

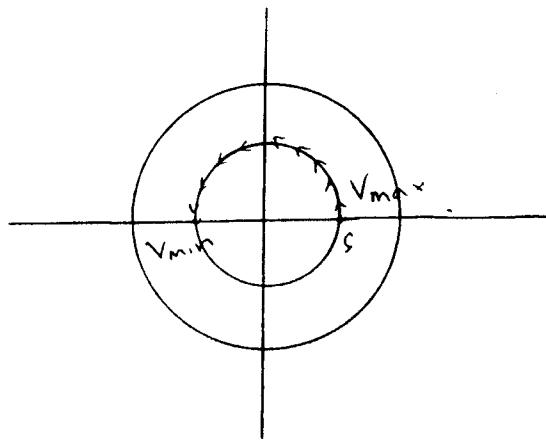

$$\text{But } l - z = \frac{\lambda}{8} \quad \text{or} \quad z - l = -\frac{\lambda}{8}$$

$$I_s = \frac{10\angle 25^\circ}{1.035\angle 15^\circ} \left(\frac{1}{50} \right) \left(e^{j\frac{\pi}{4}} - j0.2679e^{-j\frac{\pi}{4}} \right)$$

$$= \underline{0.2\angle 40^\circ A}$$

or

$$\beta z = \frac{2\pi}{\lambda} \cdot \frac{\lambda}{8} = \frac{\pi}{4}, \quad I_L = \frac{V_L}{Z_L} = \frac{10e^{j25^\circ}}{50e^{j30^\circ}} = 0.2e^{-j5^\circ}$$

$$I \left(z = \frac{\pi}{8} \right) = I_L e^{j\beta l} = 0.2e^{-j5^\circ} e^{j45^\circ}$$

$$= \underline{0.2e^{j40^\circ} A}$$

Prob. 11.20

$$(a) \quad \beta l = \frac{1}{4} \times 100 = 25 \text{ rad} = 1432.4^\circ = 352.4^\circ$$

$$Z_m = 60 \left[\frac{j40 + j60 \tan 352.4^\circ}{60 - 40 \tan 352.4^\circ} \right] = \underline{j29.375 \Omega}$$

$$V(Z=0) = V_o = \frac{Z_m}{Z_m + Z_g} V_g = \frac{j29.375(10\angle 0^\circ)}{j29.375 + 50 - j40}$$

$$= \frac{29.375\angle 90^\circ}{51.116\angle -12^\circ} = \underline{0.575\angle 102^\circ}$$

$$(b) \quad Z_m = Z_L = \underline{j40 \Omega}$$

$$V_L = V_s(Z=l), \quad V_o = V_L e^{j\beta l}$$

$$V_L = V_o e^{-j\beta l} = \left(0.575e^{j102^\circ} \right) \left(e^{-j352.4^\circ} \right)$$

$$= \underline{0.575\angle -250.4^\circ}$$

$$(c) \quad \beta l = \frac{1}{4} \times 4 = 1 \text{ rad} = 57.3^\circ$$

$$Z_m = 60 \left[\frac{j40 + j60 \tan 57.3^\circ}{60 - 40 \tan 57.3^\circ} \right] = \underline{\underline{-j3487.11\Omega}}$$

$$\begin{aligned} V &= V_L e^{j\beta l} = (0.575 \angle -250.4^\circ) e^{j57.3^\circ} \\ &= \underline{\underline{0.575 \angle -193.1^\circ}}. \end{aligned}$$

(d) 3m from the source is the same as 97m from the load., i.e.

$$l = 100 - 3 = 97 \text{ m}, \quad \beta l = \frac{1}{4} \times 97 = 24.25 \text{ rad} = 309.42^\circ$$

$$Z_m = 60 \left[\frac{j40 + j60 \tan 309.42^\circ}{60 - 40 \tan 309.42^\circ} \right] = \underline{\underline{-j18.2\Omega}}$$

$$\begin{aligned} V &= V_L e^{j\beta l} = (0.575 \angle -250.4^\circ) e^{j309.42^\circ} \\ &= \underline{\underline{0.575 \angle 59.02^\circ}}. \end{aligned}$$

Prob. 11.21

$$\beta l = \frac{2\pi}{\lambda} (1.25\lambda) = \frac{\pi}{2} + 360^\circ,$$

$$\tan \beta l \rightarrow \infty$$

$$Z_m = \frac{Z_o^2}{Z_L} = \underline{\underline{46.875\Omega}}$$

$$V_o = V(Z = 0) = \frac{Z_m}{Z_m + Z_g} V_s = 48.39V.$$

for a loss less line,

$$|V_L| = |V(Z = 0)| = \underline{\underline{48.39}}$$

Substituting V_o^+ and V_o^- in (4),

$$\begin{aligned} I_2 &= -\frac{1}{2Z_o}(V_1 + Z_o I_1)e^{-\gamma l} + \frac{1}{2Z_o}(V_1 - Z_o I_1)e^{\gamma l} \\ &= \frac{1}{2Z_o}(e^{\gamma l} - e^{-\gamma l})V_1 + \frac{1}{2}(e^{\gamma l} + e^{-\gamma l})I_1 \\ I_2 &= -\frac{1}{Z_o} \sinh \gamma l V_1 - \cosh \gamma l I_1 \end{aligned} \quad (6)$$

From (5) and (6)

$$\begin{bmatrix} V_2 \\ I_2 \end{bmatrix} = \begin{bmatrix} \cosh \gamma l & Z_o \sinh \gamma l \\ -\frac{1}{Z_o} \sinh \gamma l & -\cosh \gamma l \end{bmatrix} \begin{bmatrix} V_1 \\ I_1 \end{bmatrix}$$

But

$$\begin{bmatrix} \cosh \gamma l & Z_o \sinh \gamma l \\ -\frac{1}{Z_o} \sinh \gamma l & -\cosh \gamma l \end{bmatrix}^{-1} = \begin{bmatrix} \cosh \gamma l & Z_o \sinh \gamma l \\ -\frac{1}{Z_o} \sinh \gamma l & -\cosh \gamma l \end{bmatrix}$$

Thus


$$\begin{bmatrix} V_1 \\ I_1 \end{bmatrix} = \begin{bmatrix} \cosh \gamma l & Z_o \sinh \gamma l \\ \frac{1}{Z_o} \sinh \gamma l & \cosh \gamma l \end{bmatrix} \begin{bmatrix} V_2 \\ -I_2 \end{bmatrix}$$

Prob. 11.24

Method 1: $Z_{in} = \frac{80 - j60}{50} = 1.6 - j1.2$

$$\lambda = \frac{u}{f} = \frac{0.8 \times 3 \times 10^8}{3 \times 10^8} = 0.8m$$

$$l_1 = \frac{4.2}{2} m = 2.1m \rightarrow 720^\circ \times \frac{2.1}{0.8} = 5 \text{ revolutions} + 90^\circ$$




$$\text{At } G, \quad Z_{in} = 0.44 - j0.4$$

$$\begin{aligned} Z_{in} &= Z_{in} Z_o = 50(0.44 - j0.4) \\ &= \underline{22 - j20\Omega} \end{aligned}$$

$$|\Gamma| = \frac{OP}{OQ} = \frac{4.3cm}{9.3cm} = 0.4624, \theta_\Gamma = 50.5^\circ$$

$$\Gamma = \underline{0.4624 \angle 50.5^\circ}$$

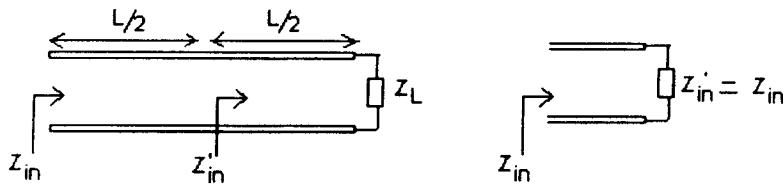

$$\tan \beta l = \tan \frac{\alpha l}{u} = \tan \frac{2\pi \times 3 \times 10^8}{0.8 \times 3 \times 10^8} (2.1)$$

$$= \tan \left(21 \times \frac{\pi}{4} \right) = 1$$

$$Z_{in} = Z_o \left[\frac{Z' + jZ_o \tan \beta l}{Z_o + jZ' \tan \beta l} \right] = 50 \left[\frac{80 - j60 + j50 \times 1}{50 + j80 - j60 \times 1} \right]$$

$$= 29.6 \angle -43.152^\circ = \underline{21.6 - 20.2\Omega}$$

$$\Gamma' = \frac{Z' - Z_o}{Z' + Z_o} = \frac{80 - j60 - 50}{80 - j60 + 50} = \frac{3 - j6}{13 - j6} = 0.4685 \angle -38.66^\circ$$

$$|\Gamma| = |\Gamma'| = 0.4685, \text{ but}$$

$$\theta_\Gamma = \theta_{\Gamma'} + 2 \times \frac{\pi}{4} = -38.66^\circ + 90^\circ = 51.34^\circ$$


$$\Gamma = \underline{0.4685 \angle 51.34^\circ}$$

Prob. 11.25

$$Z_{in} = \frac{Z_{in}}{Z_o} = \frac{90 + j150}{60} = 1.5 + j2.5$$

$$\lambda = \frac{u}{f} = \frac{3 \times 10^8}{20 \times 10^6} = 15m, l = 10m = \frac{2}{3} \lambda$$

If $\lambda \rightarrow 720^\circ$, then $\frac{2}{3} \lambda \rightarrow 480^\circ = 1 \text{ revolution} + 120^\circ$

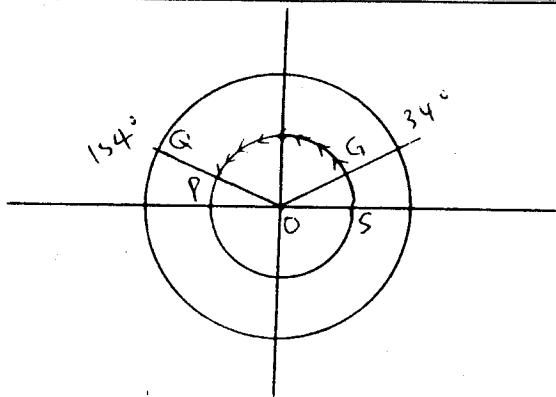


At the Load P, $Z_L = 0.17 + j0.23$

$$Z_L = Z_o Z_L = 60(0.17 + j0.23) = \underline{10.2 + j13.8\Omega}$$

$$|\Gamma| = \frac{OP}{OQ} = \frac{6.5 \text{ cm}}{9 \text{ cm}} = 0.7222, \theta = 154^\circ$$

$$\underline{\Gamma = 0.7222 \angle 154^\circ, s = 6.2}$$


Prob. 11.26



$$z_{in} = 0.2 + j0.01$$

$$Z_{in} = 75(0.2 + j0.01) = \underline{15 + j0.75\Omega}$$


Prob. 11.28



$$(a) \quad \lambda \rightarrow 720^\circ \text{ so then } \frac{\lambda}{8} \rightarrow 90^\circ$$


$$z_{in} = \underline{1 - j}$$

(b)



$$z_{in} = 0.18 + j0.31$$

(c)




$$\Gamma = 0.3 + j0.4 \\ = 0.5\angle 53.13^\circ$$

$$\frac{OP}{OQ} = 0.5$$

$$z_m = \underline{1.7 + j1.35}$$

Prob. 11.29

If $\lambda \rightarrow 270^\circ$, then $\frac{\lambda}{6} \rightarrow 120^\circ$

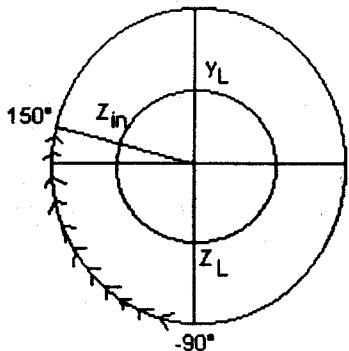

$$z_m = \underline{0.35 + j0.24}$$

Prob. 11.30

$$(a) Z_m = \frac{Z_{in}}{Z_o} = \frac{100 - j120}{80} = 1.25 - j1.5$$

$$\lambda = \frac{u}{f} = \frac{0.8 \times 3 \times 10^8}{12 \times 10^6} = 20 \text{ m}$$

$$l_1 = 22 \text{ m} = \frac{22 \lambda}{20} = 1.1\lambda \rightarrow 720^\circ + 72^\circ$$

$$l_2 = 28 \text{ m} = \frac{28 \lambda}{20} = 1.4\lambda \rightarrow 720^\circ + 72^\circ + 216^\circ$$

To locate P(the load), we move 2 revolution s plus 72° toward the load. At P,


$$|\Gamma_L| = \frac{OP}{OQ} = \frac{5.1 \text{ cm}}{9.2 \text{ cm}} = 0.5543$$

$$\theta_\Gamma = 72^\circ - 47^\circ = 25^\circ$$

$$\Gamma_L = \underline{0.5543 \angle 25^\circ}$$

$$Z_{in, max} = sZ_o = 3.7(80) = \underline{296 \Omega}$$

$$Z_{in, min} = \frac{Z_o}{s} = \frac{80}{3.7} = \underline{21.622 \Omega}$$

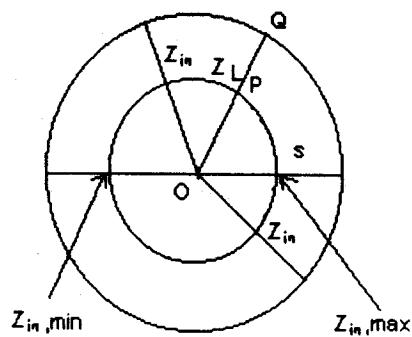

(b) Also, at P, $Z_L = 2.3 + j1.55$

$$Z_L = 80(2.3 + j1.55) = \underline{\underline{184 + j124\Omega}}$$

At S, $s = \underline{\underline{3.7}}$

To Locate Z_{in} , we move 216° from Z_{in} toward the generator.

At Z_{in} ,

$$Z_{in} = 0.48 + j0.76$$


$$Z_{in} = 80(0.48 + j0.76) = \underline{\underline{38.4 + j60.8\Omega}}$$

(c) Between Z_L and Z_{in} , we move 2 revolutions and 72° . During the movement, we pass through $Z_{in,max}$ 3 times and $Z_{in,min}$ twice.

Thus there are :

$$\underline{\underline{3 Z_{in,max} \text{ and } 2 Z_{in,min}}}$$

Prob. 11.31

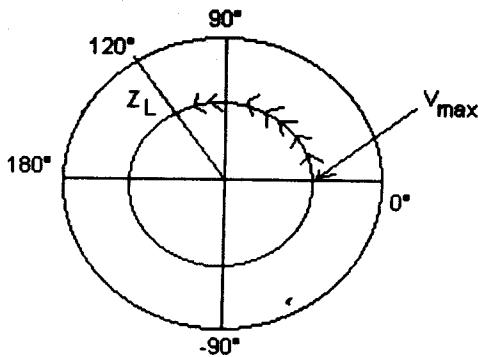

$$(a) \frac{\lambda}{2} = 120\text{cm} \rightarrow \lambda = 2.4\text{m}$$


$$u = f\lambda \rightarrow f = \frac{u}{\lambda} = \frac{3 \times 10^8}{2.4} = \underline{\underline{125\text{MHz}}}$$

$$(b) 40\text{cm} = \frac{40\lambda}{240} = \frac{\lambda}{6} \rightarrow \frac{720^\circ}{6} = 120^\circ$$

$$Z_L = Z_o Z_L = 150(0.48 + j0.48) \\ = \underline{\underline{72 + j72}}$$

$$(c) |\Gamma| = \frac{s-1}{s+1} = \frac{1.6}{3.9} = 0.444,$$

$$\Gamma = \underline{\underline{0.444 \angle 120^\circ}}$$

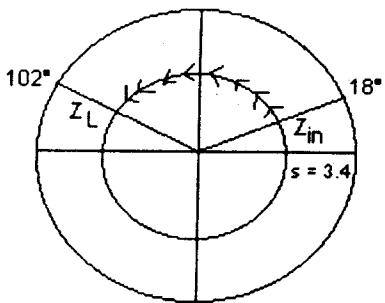Prob. 11.34


$$l = 0.2\lambda \rightarrow 720^\circ \times 0.2 = 144^\circ$$

$$Z_{in} = \frac{V_s}{I_s} = \frac{2+j}{10 \times 10^{-3}} = 200 + j100$$

$$Z_{in} = \frac{Z_{in}}{Z_L} = 2.667 + j1.33$$

$$Z_L = 0.3 + j0.12$$

$$Z_L = 75(0.3 + j0.12) = \underline{\underline{22.5 + j9\Omega}}, s = \underline{\underline{3.4}}$$

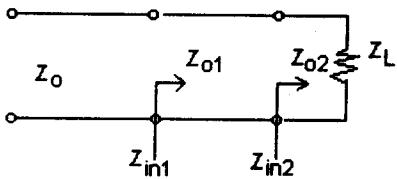Prob. 11.35

(a) From Eq.(11.43), $Z_{in2} = \frac{Z^2}{Z_L}$

$$Z_{in1} = \frac{Z^2}{Z_{in2}} = Z_o, \text{ i.e. } Z_{in2} = \frac{Z^2}{Z_o} = \frac{Z^2}{Z_L}$$

$$Z_o1 = Z_o2 \sqrt{\frac{Z_o}{Z_L}} = 30 \sqrt{\frac{50}{75}} = \underline{\underline{24.5\Omega}}$$

(b) Also, $\frac{Z_o}{Z_{o1}} = \left(\frac{Z_{o2}}{Z_L} \right) \rightarrow Z_{o2} = \frac{Z_o Z_L}{Z_{o1}}$ (1)

Also, $\frac{Z_{o1}}{Z_{o2}} = \left(\frac{Z_{o2}}{Z_L} \right)^2 \rightarrow (Z_{o2})^3 = Z_{o1} Z_L^2$ (2)

$$\text{From (1) and (2), } (Z_{o2})^3 = Z_{o1}Z_L^2 = \frac{Z_o^3 Z_L^3}{Z_{o1}^3} \quad (3)$$

$$\text{or } Z_{o1} = \sqrt[4]{Z_o^3 Z_L} = \sqrt[4]{(50)^3 (75)} = \underline{\underline{53.33\Omega}}$$

$$\text{From (3), } Z_{o2} = \sqrt[3]{Z_{o1}Z_L^2} = \sqrt[3]{(55.33)(75)^2} = \underline{\underline{67.74\Omega}}$$

Prob. 11.36

$$\frac{\lambda}{4} \rightarrow 180^\circ, \quad Z_L = \frac{74}{50} = 1.48, \quad \frac{1}{Z_L} = 0.6756$$

This acts as the Load to the left line. But there are two such loads in parallel due to the two lines on the right. Thus

$$Z_L = 50 \cdot \left(\frac{1}{Z_L} \right) = 25(0.6756) = 16.892$$

$$Z_L = \frac{16.892}{50} = 0.3378, \quad Z_{in} = \frac{1}{Z_L} = 2.96$$

$$Z_{in} = 50(2.96) = \underline{\underline{148\Omega}}$$

Prob. 11.37

From the previous problem, $Z_{in} = 148\Omega$

$$I_{in} = \frac{V_g}{Z_g + Z_{in}} = \frac{120}{80 + 148} = 0.5263A$$

$$P_{ave} = \frac{1}{2} |I_{in}|^2 R_{in} = \frac{1}{2} (0.5263)^2 (148) = 20.5W$$

Since the lines are lossless, the average power delivered to either antenna is 10.25W

Prob. 11.38

$$(a) \quad \beta l = \frac{2\pi}{4} \cdot \frac{\lambda}{4} = \frac{\pi}{2}, \quad \tan \beta l = \infty$$

$$Z_{in} = Z_o \left(\frac{Z_L + jZ_o \tan \beta l}{Z_o + jZ_L \tan \beta l} \right) = Z_o \left(\frac{\frac{Z_L}{\tan \beta l} + jZ_o}{\frac{Z_o}{\tan \beta l} + jZ_L} \right)$$

As $\tan \beta l \rightarrow \infty$,

$$Z_{in} = \frac{Z_o^2}{Z_L} = \frac{(50)^2}{100} = \underline{\underline{25\Omega}}$$

(b) If $Z_L = 0$,

$$Z_m = \frac{Z_o^2}{0} = \underline{\underline{\infty}} \quad (\text{open})$$

$$(c) \quad Z_L = 25 // \infty = \frac{25 \times \infty}{25 + \infty} = \frac{25}{1 + \frac{25}{\infty}} = 25\Omega$$

$$Z_m = \frac{(50)^2}{25} = \underline{\underline{100\Omega}}$$

Prob. 11.39

$$l_1 = \frac{\lambda}{4} \rightarrow Z_{in1} = \frac{Z_o^2}{Z_L} \text{ or } y_{in1} = \frac{Z_L}{Z_o}$$

$$y_{in1} = \frac{200 + j150}{(100)^2} = 20 + j15 \text{ mS}$$

$$l_2 = \frac{\lambda}{8} \rightarrow Z_{in2} = z_L \lim_0 Z_o \left(\frac{Z_L + jZ_o \tan \frac{\pi}{4}}{Z_o + jZ_L \tan \frac{\pi}{4}} \right) = jZ_o$$

$$y_{in2} = \frac{1}{jZ_o} = \frac{1}{j100} = -j10 \text{ mS}$$

$$l_3 = \frac{7\lambda}{8} \rightarrow Z_{in3} = Z_o \left(\frac{Z_i + jZ_o \tan \frac{7\pi}{4}}{Z_o + jZ_i \tan \frac{7\pi}{4}} \right) = \frac{Z_o(Z_i - jZ_o)}{(Z_o - jZ_i)}$$

But

$$y_i = y_{in1} + y_{in2} = 20 + j5 \text{ mS}$$

$$z_i = \frac{1}{y_i} = \frac{1000}{20 + j5} = 47.06 - j11.76$$

$$y_{in3} = \frac{Z_o - jZ_o}{Z_o(Z_i - jZ_o)} = \frac{100 - j47.06 - j11.76}{100(47.06 - j111.76 - j100)} \\ = -6.408 + j5.1890 \text{ mS}$$

If the shorted section were often,

$$y_{in1} = 20 + j15 \text{ mS}$$

$$y_{in2} = \frac{1}{Z_{in2}} = \frac{j \tan \frac{\pi}{4}}{Z_o} = \frac{1}{100} = j10 \text{ mS}$$

$$L_A = (136^\circ - 65^\circ) \frac{\lambda}{720^\circ} = \underline{0.0986\lambda}$$

$$d_A = \frac{146^\circ}{720^\circ} = \underline{0.2028\lambda}$$

Prob. 11.41


$$d_A = 0.12\lambda \rightarrow 0.12 \times 720^\circ = 86.4^\circ$$

$$l_A = 0.3\lambda \rightarrow 0.3 \times 720^\circ = 216^\circ$$

(a) From the Smith Chart,

$$Z_L = 0.57 + j0.69$$

$$\begin{aligned} Z_L &= 60(0.57 + j0.69) \\ &= \underline{34.2 + j41.4\Omega} \end{aligned}$$

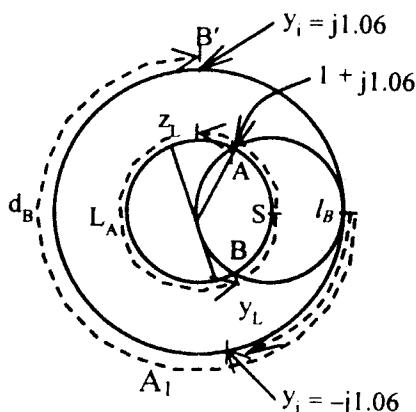


$$(b) d_B = \frac{360^\circ - 86.4^\circ}{720^\circ} \lambda = \underline{0.38\lambda}$$

$$l_B = \frac{\lambda}{2} - \frac{(-62.4^\circ - -82^\circ)}{720^\circ} \lambda = \underline{0.473\lambda}$$

$$(c) s = \underline{2.65}$$

Prob. 11.42

$$\frac{\lambda}{4} \rightarrow \frac{720^\circ}{4} = 180^\circ$$

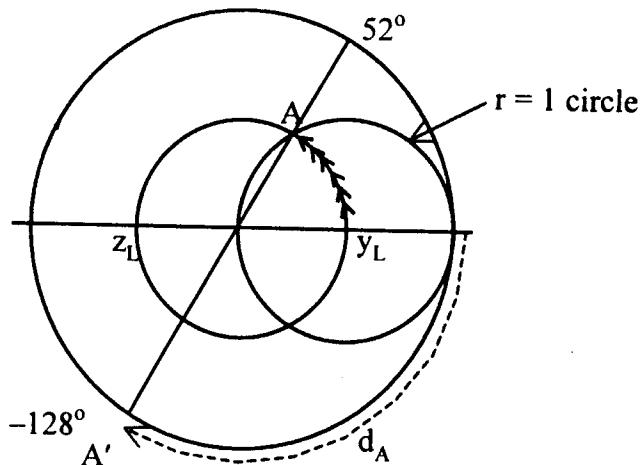

$$\text{At } A, \quad y = 1 + j1.5, \quad y = -j1.5 \rightarrow Y_s = y_s Y_o = -j1.5 Y_o$$

$$d_A = \frac{128^\circ \lambda}{720^\circ} = \underline{\underline{0.1778\lambda}}$$

$$L_A = \frac{52^\circ}{720^\circ} \lambda = \underline{\underline{0.0722\lambda}}$$

Prob. 11.43

$$s = \frac{V_{\max}}{V_{\min}} = \frac{4V}{1V} = \underline{\underline{4}}$$


$$|\Gamma| = \frac{s-1}{s+1} = \frac{3}{3} = 0.6$$

$$\frac{\lambda}{2} = 25 \text{ cm} - 5 \text{ cm} = 20 \text{ cm}$$

$$\rightarrow \lambda = 40 \text{ cm}$$

The load is $l=5\text{cm}$ from V_{\min} , i.e.

$$l = \frac{5\lambda}{40} = \frac{\lambda}{8} \rightarrow 90^\circ$$

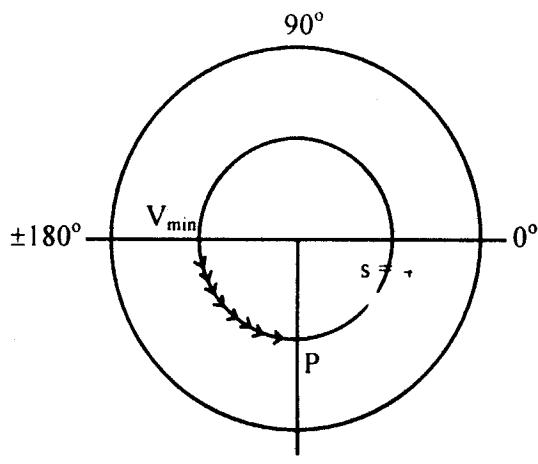

On the $s = 4$ circle, move 90° from V_{\min} towards the load and obtain $Z_L = 0.46 - j0.88$ at P.

$$Z_L = Z_0 Z_L = 60(0.46 - j0.88) = \underline{\underline{27.6 - j52.8 \Omega}}$$


$$\theta_\Gamma = 270^\circ \text{ or } 90^\circ$$

$$\Gamma = \underline{\underline{0.6 \angle -90^\circ}}$$

Prob. 11.44

$$\frac{\lambda}{2} = 32 - 12 = 20 \text{ cm} \rightarrow \lambda = 40 \text{ cm}$$

$$f = \frac{u}{\lambda} = \frac{3 \times 10^8}{40 \times 10^{-2}} = \underline{\underline{0.75 \text{ GHz}}}$$

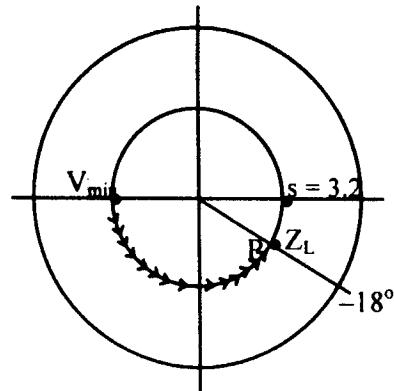

$$l = 21 - 12 = 9 \text{ cm} = \frac{9\lambda}{402} \rightarrow \frac{9}{40} \times 720^\circ = 162^\circ$$


At P, $Z_L = 2.6 - j1.2$

$$Z_L = Z_L Z_o = 50(2.6 - j1.2) = \underline{\underline{130 - j60 \Omega}}$$

Prob. 11.45

$$s = \frac{V_{\max}}{V_{\min}} = \frac{0.95}{0.45} = \underline{\underline{2.11}}$$

$$\frac{\lambda}{2} = 22.5 - 14 = 8.5 \rightarrow \lambda = 17 \text{ cm}$$

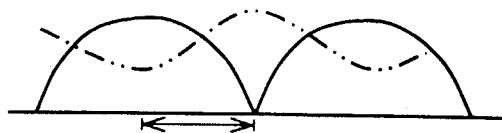

$$f = \frac{c}{\lambda} = \frac{3 \times 10^8}{0.17} = \underline{\underline{1.764 \text{ GHz}}}$$


$$l = 3.2 \text{ cm} = \frac{3.2}{17} \lambda \rightarrow 135.5^\circ$$

At P, $Z_L = 1.4 - j0.8$

$$Z_L = 50(1.4 - j0.8) = \underline{\underline{70 - j40 \Omega}}$$

$$|\Gamma| = \frac{s-1}{s+1} = \frac{1.11}{3.11} = 0.357, \quad \theta_\Gamma = -44.5^\circ$$

$$|\Gamma| = \underline{\underline{0.357 \angle -44.5^\circ}}$$

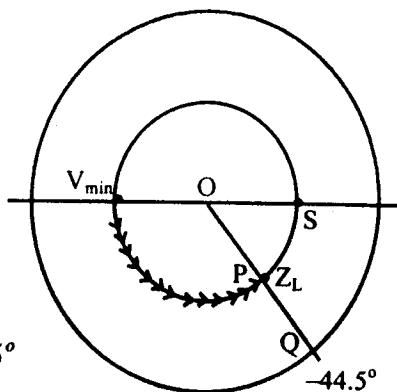

Prob. 11.46

$$\text{At } z=0, t=0^+, v_o = \frac{Z_o}{Z_o + Z_g} V_g$$

$t_1 = \frac{l}{u}$ = transit time or time delay. Hence,

$$V(l, t_1^+)$$

$$V(l, t_1^+) = V_o + \Gamma_L V_o$$


$$V(l, t_1^+) = V_o + \Gamma_L V_o$$

$$V(l, 3t_1^+) = V_o + \Gamma_L V_o + \Gamma_G \Gamma_L V_o$$



$$V(l, 5t_1^+) = V_o + \Gamma_L V_o + \Gamma_G \Gamma_L V_o + \Gamma_G \Gamma_L^2 V_o$$

$$V(l, 7t_1^+) = V_o (1 + \Gamma_L + \Gamma_G \Gamma_L + \Gamma_G \Gamma_L^2 + \Gamma_G^2 \Gamma_L^2)$$



and so on. When $t \gg \frac{l}{u}$

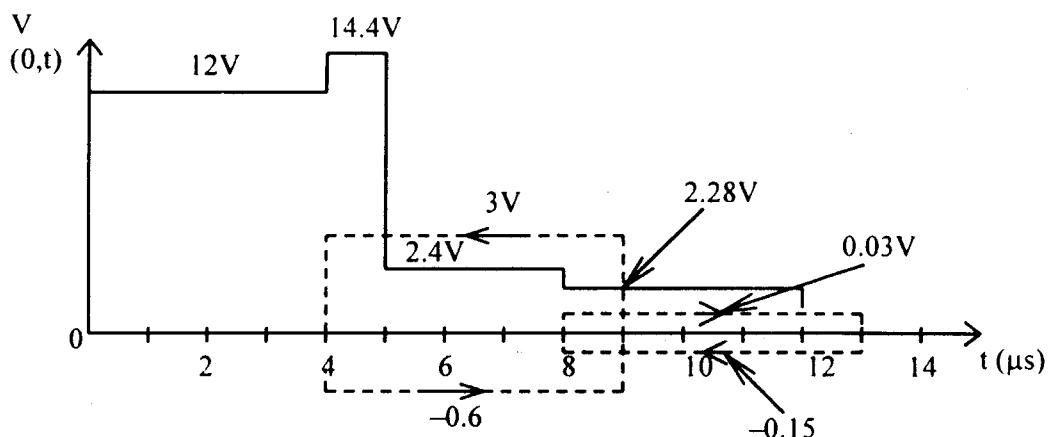

We obtain $V(l, t)$ from the bounce diagram and divide by $Z_L = 100\Omega$ to obtain $I(l, t)$.

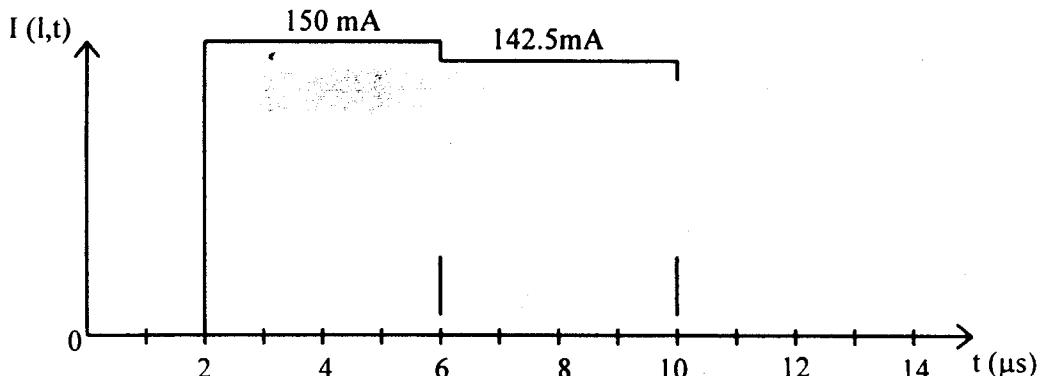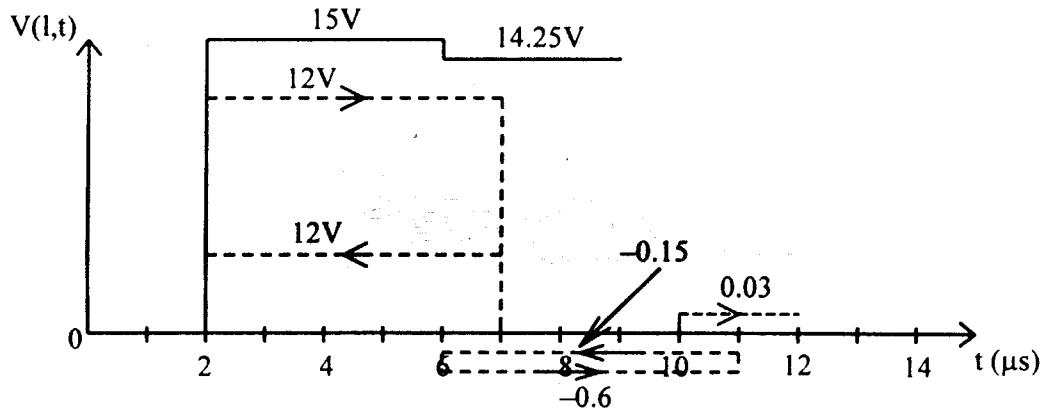


From the bounce diagram, we obtain $V(0,t)$ and $I(0,t)$ as shown below:

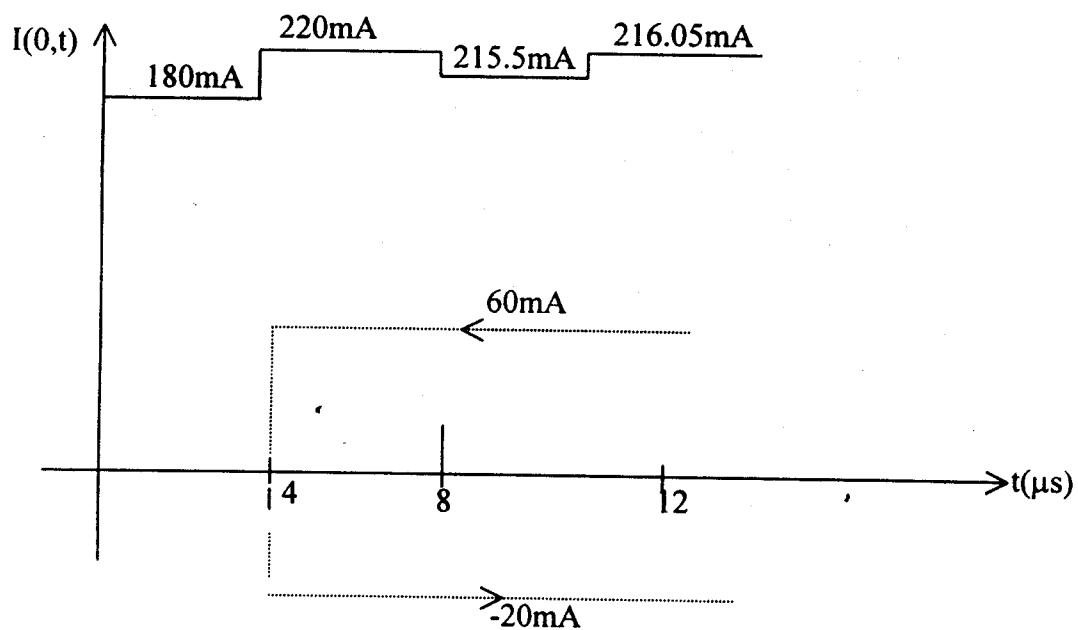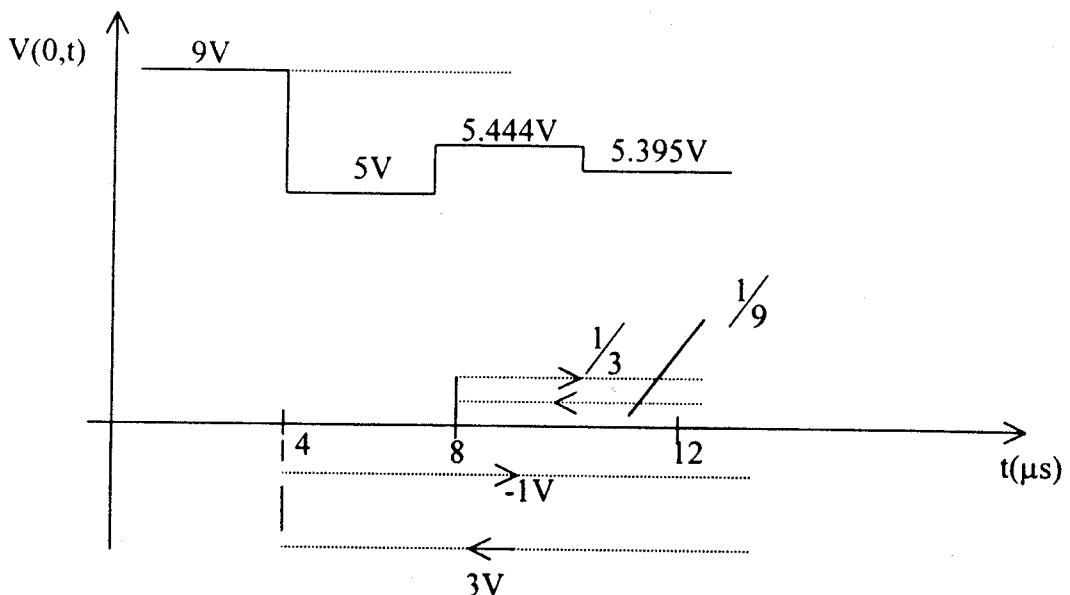

$I(l,t) = \frac{V(l,t)}{150}$, we obtain $I(l,t)$ by scaling $V(l,t)$ down by 150.

The result is shown below.


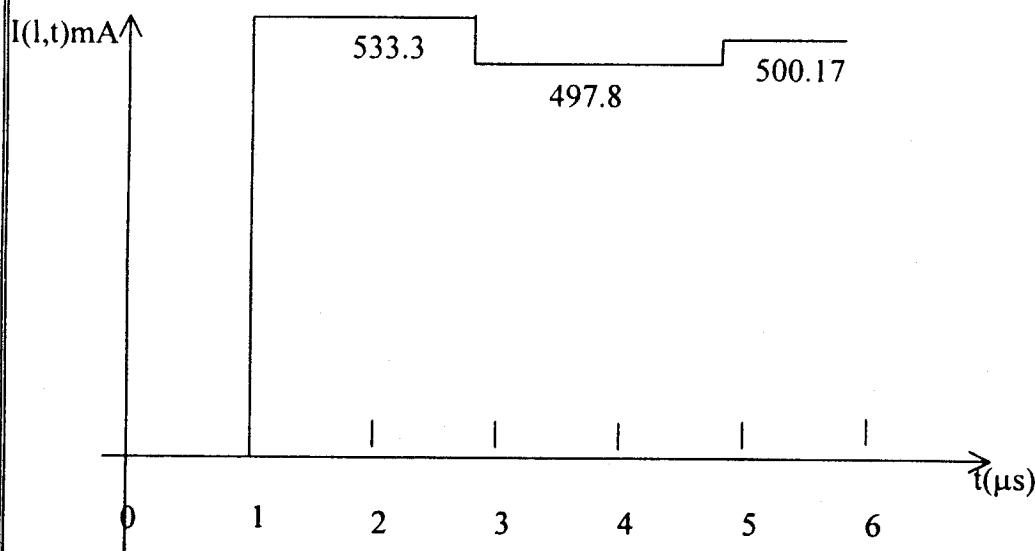


Prob. 11.50

$$(a) \quad t_1 = \frac{l}{u} = \frac{150}{3 \times 10^8} = 0.5 \mu s,$$

$$\Gamma_L = \frac{Z_L - Z_o}{Z_L + Z_o} = \frac{150 - 50}{150 + 150} = \frac{1}{2}, \quad \Gamma_g = \frac{Z_g - Z_o}{Z_g + Z_o} = \frac{25 - 50}{75} = -\frac{1}{3},$$

$$V_o = \frac{Z_o V_g}{Z_o + Z_g} = \frac{50(12)}{75} = 8V, \quad I_o = \frac{V_g}{Z_g + Z_o} = \frac{12}{75} = 160 \text{ mA}$$

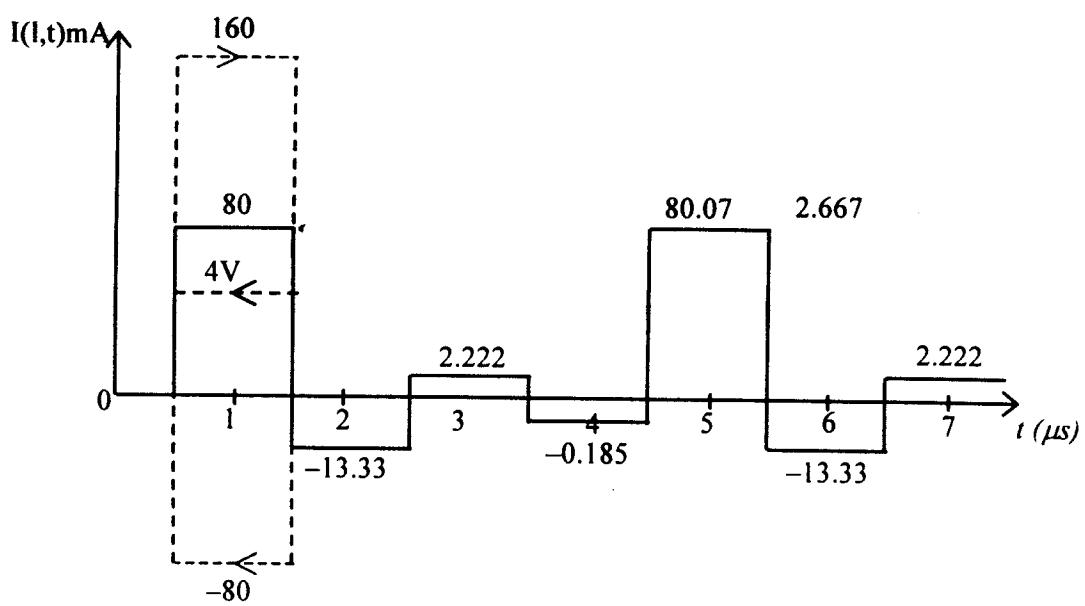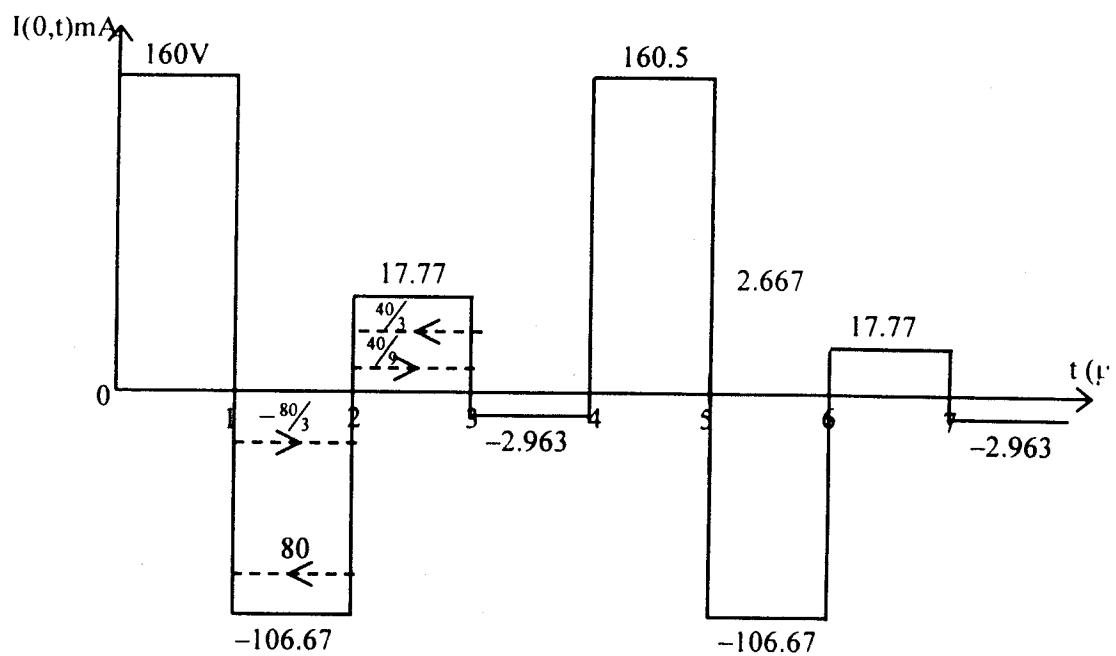

Prob 11.52

(a) Let $x = w/h$. If $x < 1$,

$$50 = \frac{60}{\sqrt{4.6}} \ln \left(\frac{8}{x} + x \right)$$

$$\sqrt{4.6} - 6 \ln \left(\frac{8}{x} + x \right) = 0$$

we solve for x (e.g using Maple) and get $x = 2.027$ or 3.945

which contradicts our assumption that $x < 1$. If $x > 1$,

$$50 = \frac{120\pi}{4.6(x + 1.393 + 0.667 \ln(x + 1.444))}$$

$$12\pi - 5\sqrt{4.6}(x + 1.393 + 0.667 \ln(x + 1.444))$$

solving for x , we obtain $x = 1.42 = \frac{w}{h}$

$$w = 1.42 \times 8 = \underline{\underline{11.36 \text{m}}}$$

$$(b) \quad \beta = \frac{\omega \epsilon_{eff}}{c}$$

$$\beta l = 45^\circ = \frac{\pi}{4} = \frac{w k \epsilon_{eff}}{c}$$

$$l = \frac{\pi c}{4 \epsilon_{eff} 2 \pi f} = \frac{3 \times 10^8}{8 \times 4.6 \times 8 \times 10^9}$$

$$\underline{\underline{l = 0.102 \text{m}}}$$

Prob. 11.53

For $w = 0.4 \text{ mm}$, $\frac{w}{h} = \frac{0.4 \text{ mm}}{2 \text{ m}} = 0.2 \rightarrow$ narrow strip

$$\frac{w}{h} = \frac{2}{\pi} \left[2.803 - \ln 6.615 + \frac{1.3}{4.6} \left(\ln 2.808 + 0.39 - \frac{0.61}{2.3} \right) \right]$$

$$= 0.793 \neq > 2$$

Thus $\frac{w}{h} = 1.539 < 2$

$$\varepsilon_{\text{eff}} = \frac{3.3}{22} + \frac{1.3}{2\sqrt{1 + \frac{12}{1.539}}} = 1.869$$

$$u = \frac{3 \times 10^8}{\sqrt{1.869}} = \underline{\underline{2.194 \times 10^8 \text{ m/s}}}$$

CHAPTER 12

P. E. 12.1 (a) For TE₁₀, f_c = 3 GHz,

$$\sqrt{1 - (f_c/f)^2} = \sqrt{1 - (3/15)^2} = \sqrt{0.96}, \quad \beta_o = \omega/u_o = 4\pi f/c$$

$$\beta = \frac{4\pi f}{c} \sqrt{0.96} = \frac{4\pi \times 15 \times 10^9}{3 \times 10^8} \sqrt{0.96} = \underline{\underline{615.6}} \text{ rad/m}$$

$$u = \frac{\omega}{\beta} = \frac{2\pi \times 15 \times 10^9}{615.6} = \underline{\underline{1.531 \times 10^8}} \text{ m/s}$$

$$\eta' = \sqrt{\frac{\mu}{\epsilon}} = 60\pi, \quad \eta_{TE} = \frac{60\pi}{\sqrt{0.96}} = \underline{\underline{192.4 \Omega}}$$

(b) For TM₁₁, f_c = 3 $\sqrt{7.25}$ GHz, $\sqrt{1 - (f_c/f)^2} = 0.8426$

$$\beta = \frac{4\pi f}{c} (0.8426) = \frac{4\pi \times 15 \times 10^9 (0.8426)}{3 \times 10^8} = \underline{\underline{529.4}} \text{ rad/m}$$

$$u = \frac{\omega}{\beta} = \frac{2\pi \times 15 \times 10^9}{529.4} = \underline{\underline{1.78 \times 10^8}} \text{ m/s}$$

$$\eta_{TM} = 60\pi (0.8426) = \underline{\underline{158.8 \Omega}}$$

P. E. 12.2 (a) Since $E_z \neq 0$, this is a TM mode

$$E_{zs} = E_o \sin(m\pi x/a) \sin(n\pi y/b) e^{-j\beta z}$$

$$E_o = 20, \quad \frac{m\pi}{a} = 40\pi \quad \longrightarrow \quad m=2, \quad \frac{n\pi}{b} = 50\pi \quad \longrightarrow \quad n=1$$

i.e. TM₂₁ mode.

$$(b) f_c = \frac{u'}{2} \sqrt{(m/a)^2 + (n/b)^2} = \frac{3 \times 10^8}{2} \sqrt{40^2 + 50^2} = 1.5\sqrt{41} \text{ GHz}$$

$$\beta = \omega \sqrt{\mu \epsilon} \sqrt{1 - (f_c/f)^2} = \frac{2\pi f}{c} \sqrt{f^2 - f_c^2} = \frac{2\pi \times 10^9}{3 \times 10^8} \sqrt{225 - 92.25} = \underline{\underline{241.3 \text{ rad/m.}}}$$

(c)

$$E_{xy} = \frac{-j\beta}{h^2} (40\pi) 20 \cos 40\pi x \sin 50\pi y e^{-j\beta z}$$

$$E_{yy} = \frac{-j\beta}{h^2} (50\pi) 20 \sin 40\pi x \cos 50\pi y e^{-j\beta z}$$

$$\frac{E_y}{E_x} = \frac{1.25 \tan 40\pi x \cot 50\pi y}{}$$

P. E. 12.3 If TE₁₃ mode is assumed, f_c and β remain the same.

$$f_c = 28.57 \text{ GHz}, \beta = 1718.81 \text{ rad/m}, \gamma = j\beta$$

$$\eta_{TE13} = \frac{377/2}{\sqrt{1 - (28.57/50)^2}} = 229.69 \Omega$$

For m=1, n=3, the field components are:

$$E_z = 0$$

$$H_z = H_o \cos(\pi x/a) \cos(3\pi y/b) \cos(\omega t - \beta z)$$

$$E_x = -\frac{\omega\mu}{h^2} \left(\frac{3\pi}{b} \right) H_o \cos(\pi x/a) \sin(3\pi y/b) \sin(\omega t - \beta z)$$

$$E_y = \frac{\omega\mu}{h^2} \left(\frac{\pi}{a} \right) H_o \sin(\pi x/a) \sin(3\pi y/b) \sin(\omega t - \beta z)$$

$$H_x = -\frac{\beta}{h^2} \left(\frac{\pi}{a} \right) H_o \sin(\pi x/a) \cos(3\pi y/b) \sin(\omega t - \beta z)$$

$$H_y = -\frac{\beta}{h^2} \left(\frac{3\pi}{a} \right) H_o \cos(\pi x/a) \sin(3\pi y/b) \sin(\omega t - \beta z)$$

$$\text{Given that } H_{ox} = 2 = -\frac{\beta}{h^2} (\pi/a) H_o,$$

$$H_{oy} = -\frac{\beta}{h^2} (3\pi/b) H_o = 6a/b = 6(1.5)/8 = 11.25$$

$$H_{oz} = H_o = -\frac{2h^2a}{\beta\pi} = \frac{-2 \times 14.51\pi^2 \times 10^4 \times 1.5 \times 10^{-2}}{1718.81\pi} = -7.96$$

$$E_{oy} = \frac{\omega\mu}{h^2} \left(\frac{\pi}{a} \right) H_o = -\frac{2\omega\mu}{\beta} = 2\eta_{TE} = -459.4$$

$$E_{ox} = -E_{oy} \frac{3a}{b} = 459.4(4.5/0.8) = 2584.1$$

$$E_x = 2584.1 \cos(\pi x/a) \sin(3\pi y/b) \sin(\omega t - \beta z) \text{ V/m,}$$

$$E_z = -459.4 \sin(\pi x/a) \sin(3\pi y/b) \sin(\omega t - \beta z) \text{ V/m.}$$

$$E_z = 0,$$

$$\text{Notice that } \left(\frac{E_y}{E_x}\right)\left(\frac{H_y}{H_x}\right) = -1$$

showing that the electric and magnetic field lines are mutually orthogonal. The field lines are as shown in Fig. 12.14.

P. E. 12.8

$$u' = \frac{l}{\sqrt{\mu\epsilon}} = \frac{c}{\sqrt{\epsilon}}$$

$$f_{TE101} = \frac{1.5 \times 10^{10}}{\sqrt{3}} \sqrt{1/25 + 0 + 1/100} = \underline{\underline{1.936}} \text{ GHz}$$

$$Q_{TE101} = \frac{1}{6l\delta}, \text{ where}$$

$$\delta = \frac{1}{\sqrt{\pi f_{101} \mu \sigma_c}} = \frac{1}{\sqrt{\pi \times 1.936 \times 10^9 \times 4 \times 10^{-7} \times 5.8 \times 10^7}} = 1.5 \times 10^{-6}$$

$$Q_{TE101} = \frac{10^6}{6l \times 1.5} = \underline{\underline{10,929}}$$

Prob. 12.1 (a) For TM_{mn} modes, $H_z = 0$

$$E_{zs} = E_o \sin(\pi x/a) \sin(\pi y/b) e^{-r}$$

Using eq. (12.15), all field components vanish for TM_{01} and TM_{10} .

(b) See text.

Prob. 12.2 (a)

$$f_c = \frac{u'}{2} \sqrt{1/a^2 + 1/b^2} = \frac{3 \times 10^8}{2\sqrt{4 \times 10^{-2}}} \sqrt{1/2^2 + 1/3^2} = \underline{\underline{4.507}} \text{ GHz}$$

(b)

$$\beta = \beta' \sqrt{1 - (f_c/f)^2} = \frac{\omega}{u'} \sqrt{1 - (f_c/f)^2} = \frac{2\pi \times 20 \times 10^9 \sqrt{4}}{3 \times 10^8} \sqrt{1 - (4.508/20)^2}$$

$$= 816.2 \text{ rad/m}$$

(c)

$$u = \omega / \beta = \frac{2\pi \times 20 \times 10^9}{816.21} = \underline{1.54 \times 10^8} \text{ m/s}$$

Prob. 12.3 (a)

$$f_c = \frac{u'}{2} \sqrt{(m/a)^2 + (n/b)^2} = \frac{3 \times 10^8}{2 \times 9 \times 10^{-2}} \sqrt{(m/1)^2 + (n/2)^2} = \frac{15}{18} \sqrt{4m^2 + n^2} \text{ GHz}$$

Mode	F_c (GHz)
TE ₀₁	0.8333
TE ₁₀ , TE ₀₂	1.667
TE ₁₁ , TM ₁₁	1.863
TE ₁₂ , TM ₁₃	2.357
TE ₀₃	2.5
TE ₁₃ , TM ₁₃	3
TE ₀₄	3.333
TE ₁₄ , TM ₁₄	3.727
TE ₀₅ , TE ₂₃ , TM ₂₃	4.167
TE ₁₅ , TM ₁₅	4.488

(b) The highest possible mode is TE₁₅ or TM₁₅.

$$\eta' = \frac{120\pi}{9} = 41.89, \quad \sqrt{1 - (f_c/f)^2} = \sqrt{1 - (4.488/4.5)^2} = 0.073$$

$$\eta_{TE15} = \frac{\eta'}{\sqrt{1 - (f_c/f)^2}} = \frac{41.89}{0.073} = \underline{\underline{573.8 \Omega}}$$

$$\eta_{TM15} = \eta' \sqrt{1 - (f_c/f)} = \underline{\underline{3.058 \Omega}}$$

(c) The lowest mode is TE₀₁

$$u' = c/9, \quad u_g = u' \sqrt{1 - (f_c/f)^2} = \frac{3 \times 10^8}{9} \sqrt{1 - (0.8333/4.5)^2} = 3.276 \times 10^8 \text{ m/s}$$

Prob. 12.4 $a/b = 3 \longrightarrow a = 3b$

$$f_{c10} = \frac{u'}{2a} \longrightarrow a = \frac{u'}{2f_{c10}} = \frac{3 \times 10^8}{2 \times 18 \times 10^9} \text{ m} = 0.833 \text{ cm}$$

A design could be a = 9mm, b = 3mm.

$$t = \frac{2l}{u} = \frac{300}{6.975 \times 10^8} = \underline{\underline{430}} \text{ ns}$$

Prob. 12.8

$$f_c = \frac{u'}{2} \sqrt{(m/a)^2 + (n/b)^2}$$

$$f_{c11} = f_{c03} \longrightarrow \frac{u'}{2} \sqrt{(1/a)^2 + (1/b)^2} = \frac{u'}{2} \sqrt{9/b^2}$$

$$\frac{9}{b^2} = \frac{1}{a^2} + \frac{1}{b^2} \longrightarrow a = \frac{b}{\sqrt{8}}$$

$$f_{c03} = \frac{3u'}{2b} \longrightarrow b = \frac{3c}{2f_{c03}} = \frac{9 \times 10^8}{2 \times 12 \times 10^9} = 3.75 \text{ cm}$$

$$\underline{\underline{a = 1.32 \text{ cm}, b = 3.75 \text{ cm}}}$$

Since $a < b$, the dominant mode is TE_{01}

$$f_{c01} = \frac{c}{2b} = \frac{3 \times 10^8}{2 \times 3.75 \times 10^{-2}} = 4 \text{ GHz} < f = 8 \text{ GHz}$$

Hence, the dominant mode will propagate.

Prob. 12.9 $E_z \neq 0$. This must be TM_{23} mode ($m=2, n=3$). Since $a=2b$,

$$f_c = \frac{c}{4b} \sqrt{m^2 + 4n^2} = \frac{3 \times 10^8}{4 \times 3 \times 10^{-2}} \sqrt{4+36} = 15.81 \text{ GHz}, \quad f = \frac{\omega}{2\pi} = \frac{10^{12}}{2\pi} = 159.2 \text{ GHz}$$

$$\eta_{\text{TM}} = \frac{I}{377 \sqrt{1 - (15.81/159.2)^2}} = \underline{\underline{375.1 \Omega}}$$

$$\mathcal{P}_{\text{ave}} = \frac{|E_{xs}|^2 + |E_{ys}|^2}{2\eta_{\text{TM}}} a_z$$

$$= \frac{\beta^2 E_o^2}{2h^4 \eta_{\text{TM}}} [(2\pi/a)^2 \cos^2(2\pi x/a) \sin^2(3\pi y/b) + (3\pi/b)^2 \sin^2(2\pi x/a) \cos^2(3\pi y/b)] a_z$$

$$P_{ave} = \int \mathcal{P}_{ave} \cdot dS = \int_{x=0}^a \int_{y=0}^b \mathcal{P}_{ave} \cdot dx dy a_z$$

$$= \frac{\beta^2 E_o^2}{2h^2 \eta_{TM}} \frac{I}{4} \left[\frac{4\pi^2}{a^2} + \frac{9\pi^2}{b^2} \right] = \frac{\beta^2 E_o^2}{8h^2 \eta_{TM}}$$

But

$$\beta = \frac{\omega}{c} \sqrt{1 - (f_c/f)^2} = \frac{10^{12}}{3 \times 10^8} \sqrt{1 - (15.81/159.2)^2} = 3.317 \times 10^3$$

$$h^2 = \frac{4\pi^2}{a^2} + \frac{9\pi^2}{b^2} = \frac{10\pi^2}{b^2} = 1.098 \times 10^5$$

$$P_{ave} = \frac{(3.317)^2 \times 10^6 \times 25}{8 \times (1.098 \times 10^5)^2 \times 375.4} = \underline{\underline{0.8347}} \text{ W}$$

Prob. 12.10 (a) Since m=2 and n=1, we have TE₂₁ mode

$$(b) \beta = \beta' \sqrt{1 - (f_c/f)^2} = \omega \sqrt{\mu_o \epsilon_o} \sqrt{1 - (\omega_c/\omega)^2}$$

$$\beta c = \sqrt{\omega^2 - \omega_c^2} \quad \longrightarrow \quad \omega_c^2 = \sqrt{\omega^2 - \beta^2 c^2}$$

$$f_c = \frac{\omega_c}{2\pi} = \sqrt{f^2 - \frac{\beta^2 c^2}{4\pi^2}} = \sqrt{36 \times 10^{18} - \frac{144 \times 9 \times 10^{16}}{4\pi^2}} = \underline{\underline{5.973}} \text{ GHz}$$

$$(c) \eta_{TE} = \frac{\eta}{\sqrt{1 - (f_c/f)^2}} = \frac{377}{\sqrt{1 - (5.973/6)^2}} = \underline{\underline{3978 \Omega}}$$

(d) For TE mode,

$$E_y = \frac{\omega \mu}{h^2} (m\pi/a) H_o \sin(m\pi x/a) \cos(n\pi y/b) \sin(\omega t - \beta z)$$

$$H_x = \frac{-\beta}{h^2} (m\pi/a) H_o \sin(m\pi x/a) \cos(n\pi y/b) \sin(\omega t - \beta z)$$

$$\beta = 12, m = 2, n = 1$$

$$E_{oy} = \frac{\omega \mu}{h^2} (m\pi/a) H_o, \quad H_{ox} = \frac{\beta}{h^2} (m\pi/a) H_o$$

$$\eta_{TE} = \frac{E_{oy}}{H_{ox}} = \frac{\omega \mu}{\beta} = \frac{2\pi \times 6 \times 10^9 \times 4\pi \times 10^{-7}}{12} = 4\pi^2 \times 100$$

$$H_{ox} = \frac{E_{oy}}{\eta_{TE}} = \frac{5}{4\pi^2 x 100} = 1.267 \text{ mA/m}$$

$$H_x = -1.267 \sin(m\pi x/a) \cos(n\pi y/b) \sin(\omega t - \beta z) \text{ mA/m}$$

Prob. 12.11 (a) Since $m=2, n=3$, the mode is TE₂₃.

$$(b) \quad \beta' = \beta' \sqrt{1 - (f_c/f)^2} = \frac{2\pi f}{c} \sqrt{1 - (f_c/f)^2}$$

But

$$f_c = \frac{u'}{2} \sqrt{(m/a)^2 + (n/b)^2} = \frac{3 \times 10^8}{2 \times 10^{-2}} \sqrt{(2/2.86)^2 + (3/1.016)^2} = 46.19 \text{ GHz}, \quad f = 50 \text{ GHz}$$

$$\beta' = \frac{2\pi \times 50 \times 10^9}{3 \times 10^8} \sqrt{1 - (46.19/50)^2} = 400.68 \text{ rad/m}$$

$$\gamma = j\beta' = j400.7 \text{ /m}$$

$$(c) \quad \eta' = \frac{\eta'}{\sqrt{1 - (f_c/f)^2}} = \frac{377}{\sqrt{1 - (46.19/50)^2}} = 985.3 \Omega$$

Prob. 12.12

$$P_{ave} = \frac{I}{2\eta_{TE}} \int_{y=0}^b \int_0^a (|E_{xs}|^2 + |E_{ys}|^2) dx dy$$

But

$$E_{xs} = \frac{-j\beta}{h^2} (\pi/a) H_o \cos(\pi x/a) \sin(\pi y/b) e^{-j\beta z}$$

$$E_{ys} = \frac{-j\beta}{h^2} (\pi/b) E_o \sin(\pi x/a) \cos(\pi y/b) e^{-j\beta z}$$

$$\begin{aligned} P_{ave} &= \frac{I}{2\eta_{TE}} \frac{\beta^2 \pi^2}{h^4} E_o^2 \left[\frac{1}{a^2} \int_0^a \cos^2(\pi x/a) dx \int_0^b \sin^2(\pi x/b) dy \right. \\ &\quad \left. + \frac{1}{b^2} \int_0^b \sin^2(\pi y/b) dy \int_0^a \cos^2(\pi x/a) dx \right] \\ &= \frac{I}{2\eta_{TE}} \frac{\beta^2 \pi^2}{h^4} E_o^2 \left[\frac{1}{a^2} + \frac{1}{b^2} \right] (a/2)(b/2) \end{aligned}$$

Note that $h^2 = \frac{\pi^2}{a^2} + \frac{\pi^2}{b^2} = \frac{a^2 + b^2}{a^2 b^2} \pi^2$

$$P_{ave} = \frac{\beta^2 E_o^2}{8\pi^2 \eta_{TMI}} \frac{a^3 b^3}{a^2 + b^2}$$

Prob. 12.13 (a)

$$f_c = \frac{u'}{2} \sqrt{(m/a)^2 + (n/b)^2}, \quad \beta = \beta' \sqrt{1 - (f_c/f)^2}$$

$$u = \omega / \beta = \frac{u'}{\sqrt{1 - (f_c/f)^2}}, \quad \lambda = 2\pi / \beta = \frac{\lambda'}{\sqrt{1 - (f_c/f)^2}}$$

(b) If $a = 2b = 2.5\text{cm}$, $f_c = \frac{u'}{2a} \sqrt{m^2 + 4n^2}$. For TE₁₁,

$$f_c = \frac{3 \times 10^8}{2 \times 2.5 \times 10^{-2}} \sqrt{1+4} = 13.42 \text{ GHz}, \quad u = \frac{3 \times 10^8}{\sqrt{1 - (13.42/20)^2}} = \underline{4.06 \times 10^8} \text{ m/s}$$

$$\lambda = u/f = \frac{4.046 \times 10^8}{200 \times 10^8} = \underline{2.023} \text{ cm}$$

For TE₂₁,

$$f_c = \frac{3 \times 10^8}{2 \times 2.5 \times 10^{-2}} \sqrt{4+4} = 16.97 \text{ GHz}, \quad u = \frac{3 \times 10^8}{\sqrt{1 - (16.97/20)^2}} = \underline{5.669 \times 10^8} \text{ m/s}$$

$$\lambda = u/f = \frac{5.669 \times 10^8}{200 \times 10^8} = \underline{2.834} \text{ cm}$$

Prob. 12.14 (a)

$$f_c = \frac{u'}{2} \sqrt{(m/a)^2 + (n/b)^2} = \frac{3 \times 10^8}{2 \times 10^{-2}} \sqrt{1/1+4/9} = 18.03 \text{ GHz}$$

$$f = 1.2 f_c = \underline{21.63 \text{ GHz}}$$

(b) $\sqrt{1 - (f_c/f)^2} = \sqrt{1 - (1/1.2)^2} = 0.5528$

$$u_r = \frac{c}{\sqrt{1 - (f_c/f)^2}} = \frac{3 \times 10^8}{0.5528} = \underline{5.427 \times 10^8} \text{ m/s}$$

$$u_g = u \sqrt{1 - (f_c/f)^2} = 3 \times 10^8 \times 0.5528 = \underline{1.658 \times 10^8} \text{ m/s}$$

Prob. 12.15

$$f_c = \frac{3 \times 10^8}{2} \sqrt{(m/0.025)^2 + (n/0.01)^2} = 15 \sqrt{n^2 + (m/2.5)^2} \text{ GHz}$$

$$f_{c10} = 6 \text{ GHz}, f_{c20} = 12 \text{ GHz}, f_{c01} = 15 \text{ GHz}.$$

Since $f_{c20}, f_{c10} > 11 \text{ GHz}$, only the dominant TE_{10} mode is propagated.

$$(a) \frac{u_p}{u} = \frac{1}{\sqrt{1 - (f_c/f)^2}} = \frac{1}{\sqrt{1 - (6/11)^2}} = \underline{\underline{1.193}}$$

$$(b) \frac{u_g}{u} = \sqrt{1 - (6/11)^2} = \underline{\underline{0.8381}}$$

$$\text{Prob. 12.16} \text{ Let } F = \sqrt{1 - (f_c/f)^2} = \sqrt{1 - (16/24)^2} = 0.7453$$

$$u' = \frac{1}{\sqrt{\mu \epsilon}} = \frac{3 \times 10^8}{\sqrt{2.25}} = 2 \times 10^8, \quad u_p = \frac{u'}{F}, \quad u_g = u' F = 2 \times 10^8 \times 0.7453 = \underline{\underline{1.491 \times 10^8}} \text{ m/s}$$

$$\eta_{TE} = \eta'/F = \frac{377}{1.5 \times 0.7453} = \underline{\underline{337.2 \Omega}}$$

Prob. 12.17 In free space,

$$\eta_1 = \frac{\eta_o}{\sqrt{1 - (f_c/f)^2}}, \quad f_c = \frac{c}{2a} = \frac{3 \times 10^8}{2 \times 5 \times 10^{-2}} = 3 \text{ GHz}$$

$$\eta_1 = \frac{377}{\sqrt{1 - (3/8)^2}} = 406.7$$

$$\eta_2 = \frac{\eta'_1}{\sqrt{1 - (f_c/f)^2}}, \eta' = \frac{120\pi}{\sqrt{2.25}} = 80\pi, f_c = \frac{u'}{2a}, u' = \frac{c}{\sqrt{\epsilon}},$$

$$f_c = \frac{3 \times 10^8}{2 \times 5 \times 10^{-2} \sqrt{2.25}} = 2 \text{ GHz}, \quad \eta_2 = \frac{80\pi}{\sqrt{1 - (2/8)^2}} = 82.62$$

$$\Gamma = \frac{\eta_2 - \eta_1}{\eta_2 + \eta_1} = \frac{82.62 - 406.7}{82.62 + 406.7} = -0.662$$

$$s = \frac{1 + |\Gamma|}{1 - |\Gamma|} = \frac{1.662}{0.338} = \underline{\underline{4.917}}$$

Prob. 12.18 Substituting $E_z = R\phi Z$ into the wave equation,

$$\frac{\phi Z}{\rho} \frac{d}{d\rho} (\rho R') + \frac{RZ}{\rho^2} \phi'' + R\phi Z' + k^2 R\phi Z = 0$$

Dividing by $R\phi Z$,

$$\frac{1}{R\rho} \frac{d}{d\rho} (\rho R') + \frac{\phi''}{\phi\rho^2} + k^2 = -\frac{Z''}{Z} = -k_z^2$$

i.e. $Z'' - k_z^2 Z = 0$

$$\frac{1}{R\rho} \frac{d}{d\rho} (\rho R') + \frac{\phi''}{\phi\rho^2} + (k^2 + k_z^2) = 0$$

$$\frac{\rho}{R} \frac{d}{d\rho} (\rho R') + (k^2 + k_z^2)\rho^2 = -\frac{\phi''}{\phi} = k_\phi^2$$

or

$$\underline{\phi'' + k_\phi^2 \phi = 0}$$

$$\rho \frac{d}{d\rho} (\rho R') + (k_\rho^2 \rho^2 - k_\phi^2) R = 0, \text{ where } k_\rho^2 = k^2 + k_z^2. \text{ Hence}$$

$$\underline{\rho^2 R'' + \rho R' + (k_\rho^2 \rho^2 - k_\phi^2) R = 0}$$

Prob. 12.19

$$\mathcal{P}_{ave} = \frac{|E_{xs}|^2 + |E_{ys}|^2}{2\eta} a_z = \underline{\underline{\frac{\omega^2 \mu^2 \pi^2}{2\eta b^2 h^4} H_o^2 \sin^2 \pi y / ba_z}}$$

$$P_{ave} = \int \mathcal{P}_{ave} dS = \frac{\omega^2 \mu^2 \pi^2}{2\eta b^2 h^4} H_o^2 \int_{x=0}^a \int_{y=0}^b \sin^2 \pi y / b dx dy$$

$$P_{ave} = \frac{\omega^2 \mu^2 \pi^2}{2\eta b^2 h^4} H_o^2 ab / 2$$

$$\text{But } h^2 = (m\pi/a)^2 + (n\pi/b)^2 = \frac{\pi^2}{h^2},$$

$$= \sqrt{-139556.21 + \frac{\pi^2}{(10^{-2})^2} + j9.4748} = 0.02344 + j202.14$$

$\alpha_d = 0.02344 \text{ Np/m}$

$$\alpha_c = \frac{2R_s}{b\eta' \sqrt{1 - (f_c/f)^2}} \left[\frac{(b/a)^3 + 1}{(b/a)^2 + 1} \right] = \frac{2 \times 2.858 \times 10^{-2}}{10^{-2} (233.81) \sqrt{1 - (10.4/12)^2}} \left[\frac{(1/8) + 1}{(1/4) + 1} \right]$$

$\alpha_c = 0.0441 \text{ Np/m}$

Prob. 12.21 $\epsilon_c = \epsilon' - j\epsilon'' = \epsilon - j\frac{\sigma}{\omega}$

Comparing this with

$$\epsilon_c = 16\epsilon_o(1 - j10^{-4}) = 16\epsilon_o - j16\epsilon_o \times 10^{-4}$$

$$\epsilon = 16\epsilon_o, \quad \frac{\sigma}{\omega} = 16\epsilon_o \times 10^{-4}$$

For TM₂₁ mode,

$$f_c = \frac{u'}{2} \left[\frac{m^2}{a^2} + \frac{n^2}{b^2} \right]^{1/2} = 4.193 \text{ GHz}, \quad f = 1.1f_c = 4.6123 \text{ GHz}$$

$$\sigma = 16\epsilon_o \omega \times 10^{-4} = 16 \times 2\pi \times 4.6123 \times 10^9 \times \frac{10^{-9}}{36\pi} \times 10^{-4} = 4.1 \times 10^{-4}$$

$$\eta' = \sqrt{\frac{\mu}{\epsilon}} = 30\pi$$

$$\alpha_d = \frac{\sigma \eta'}{2\sqrt{1 - (f_c/f)^2}} = \frac{4.1 \times 10^{-4} \times 30\pi}{2\sqrt{1 - 1/1.12}} = \underline{\underline{0.04637 \text{ Np/m}}}$$

$$E_o e^{-\alpha_d z} = 0.8 E_o \quad \longrightarrow \quad z = \frac{l}{\alpha_d} \ln(1/0.8) = \underline{\underline{4.811 \text{ cm}}}$$

Prob. 12.22 For TM₂₁ mode,

$$\alpha_c = \frac{2R_s}{b\eta' \sqrt{1 - (f_c/f)^2}}$$

$$(b) \alpha_{cTE10} = \frac{2R_s}{b\eta' \sqrt{1 - (f_c/f)^2}} \left[\frac{1}{2} + \frac{b}{a} \left(\frac{f_c}{f} \right)^2 \right]$$

$$R_s = \sqrt{\frac{\pi f \mu}{\sigma_c}} = \sqrt{\frac{\pi \times 5 \times 10^9 \times 4 \pi \times 10^{-7}}{1.37 \times 10^7}} = 3.796 \times 10^{-3}$$

$$\eta' = \frac{377}{\sqrt{2.11}} = 259.54$$

$$\alpha_c = \frac{2 \times 3.796 \times 10^{-3} [0.5 + \frac{1.5}{2.25} (4.589/5)^2]}{1.5 \times 10^{-4} (259.54) \sqrt{1 - (4.589/5)^2}} = \underline{0.05217} \text{ Np/m}$$

Prob. 12.25 For TE₁₀ mode,

$$\alpha_c = \frac{2R_s}{b\eta' \sqrt{1 - (f_c/f)^2}} \left[\frac{1}{2} + \frac{b}{a} \left(\frac{f_c}{f} \right)^2 \right]$$

$$\text{But } a = b, R_s = \frac{I}{\sigma_c \delta} = \sqrt{\frac{\pi f \mu}{\sigma_c}}$$

$$\alpha_c = \frac{2 \sqrt{\frac{\pi f \mu}{\sigma_c}}}{a \eta' \sqrt{1 - (f_c/f)^2}} \left[\frac{1}{2} + \left(\frac{f_c}{f} \right)^2 \right] = \frac{k \sqrt{f} \left[\frac{1}{2} + \left(\frac{f_c}{f} \right)^2 \right]}{\sqrt{1 - (f_c/f)^2}}$$

where k is a constant.

$$\frac{d\alpha_c}{df} = \frac{k [1 - (\frac{f_c}{f})^2]^{1/2} [\frac{1}{4} f^{-1/2} - \frac{3}{2} f_c^2 f^{-5/2}] - \frac{k}{2} [\frac{1}{2} f^{1/2} + f_c^2 f^{-3/2}] (2f_c^2 f^{-3}) [1 - (\frac{f_c}{f})^2]^{-1/2}}{1 - (f_c/f)^2}$$

For minimum value, $\frac{d\alpha_c}{df} = 0$. This leads to $f = \underline{2.962} f_c$.

Prob. 12.26

$$\alpha = k \sqrt{\frac{f}{1 - (f_c/f)^2}}, \text{ where k is a constant}$$

$$\alpha = k \frac{f^{3/2}}{\sqrt{f^2 - f_c^2}}$$

$$\frac{d\alpha}{df} = k \frac{\sqrt{f^2 - f_c^2} \frac{3}{2} f^{1/2} - f^{3/2} \frac{1}{2} 2f \frac{1}{\sqrt{f^2 - f_c^2}}}{f^2 - f_c^2}$$

For maximum α , $\frac{d\alpha}{df} = 0$ which implies that

$$(f^2 - f_c^2) \cdot \frac{3}{2} f^{1/2} - f^{3/2} = 0$$

or

$$f = \sqrt{3} f_c$$

Prob. 12.27 For the TE mode to z,

$$E_{zs} = 0, H_{zs} = H_o \cos(m\pi x/a) \cos(n\pi y/b) \sin(p\pi z/c)$$

$$E_{ys} = -\frac{\gamma}{h^2} \frac{\partial E_{zs}}{\partial y} + \frac{j\omega \mu}{h^2} \frac{\partial H_{zs}}{\partial x} = -\frac{j\omega \mu}{h^2} (m\pi/a) H_o \sin(m\pi x/a) \cos(n\pi y/b) \sin(p\pi z/c)$$

as required.

$$E_{xs} = -\frac{\gamma}{h^2} \frac{\partial E_{zs}}{\partial x} - \frac{j\omega \mu}{h^2} \frac{\partial H_{zs}}{\partial y} = \frac{j\omega \mu}{h^2} (n\pi/b) H_o \cos(m\pi x/a) \sin(n\pi y/b) \sin(p\pi z/c)$$

From Maxwell's equation,

$$-j\omega \mu H_s = \nabla_x E_s = \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ E_{xs} & E_{ys} & 0 \end{vmatrix}$$

$$H_{xs} = \frac{1}{j\omega \mu} \frac{\partial E_{ys}}{\partial z} = -\frac{1}{h^2} (m\pi/a) (p\pi/c) H_o \sin(m\pi x/a) \cos(n\pi y/b) \cos(p\pi z/c)$$

Prob. 12.28 Maxwell's equation can be written as

$$H_{ys} = \frac{j\omega \epsilon}{h^2} \frac{\hat{c} E_{zs}}{\hat{c} y} - \frac{\gamma}{h^2} \frac{\hat{c} H_{zs}}{\hat{c} x}$$

For a rectangular cavity,

$$h^2 = k_x^2 + k_y^2 = (m\pi/a)^2 + (n\pi/b)^2$$

For TM mode, $H_{zs} = 0$ and

$$E_{zs} = E_o \sin(m\pi x/a) \sin(n\pi y/b) \cos(p\pi z/c)$$

Thus

$$H_{xs} = \frac{j\omega \epsilon}{h^2} \frac{\partial E_{zs}}{\partial y} = \frac{j\omega \epsilon}{h^2} (n\pi/b) E_o \sin(m\pi x/a) \cos(n\pi y/b) \sin(p\pi z/c)$$

as required.

$$\begin{aligned} H_{xs} &= -\frac{j\omega \epsilon}{h^2} \frac{\partial E_{zs}}{\partial x} - \frac{\gamma}{h^2} \frac{\partial H_{zs}}{\partial y} \\ &= -\frac{j\omega \epsilon}{h^2} (m\pi/a) E_o \cos(m\pi x/a) \sin(n\pi y/b) \cos(p\pi z/c) \end{aligned}$$

From Maxwell's equation,

$$\begin{aligned} j\omega \epsilon E_s &= \nabla \times H_s = \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ H_{xs} & H_{ys} & 0 \end{vmatrix} \\ E_{ys} &= \frac{I}{j\omega \epsilon} \frac{\partial H_{xs}}{\partial z} = -\frac{I}{h^2} (n\pi/b)(p\pi/c) E_o \sin(m\pi x/a) \cos(n\pi y/b) \sin(p\pi z/c) \end{aligned}$$

Prob. 12.29

$$f_r = \frac{u'}{2} \sqrt{(m/a)^2 + (n/b)^2 + (p/c)^2}$$

where for TM mode to z, $m = 1, 2, 3, \dots$, $n = 1, 2, 3, \dots$, $p = 0, 1, 2, \dots$

and for TE mode to z, $m = 1, 2, 3, \dots$, $n = 1, 2, 3, \dots$, $p = 1, 2, 3, \dots$

(a) If $a < b < c$, $1/a > 1/b > 1/c$,

The lowest TM mode is TM₁₁₀ with $f_r = \frac{u'}{2} \sqrt{\frac{I}{a^2} + \frac{I}{b^2}}$

The lowest TE mode is TE₀₁₁ with $f_r = \frac{u'}{2} \sqrt{\frac{I}{b^2} + \frac{I}{c^2}} < \frac{u'}{2} \sqrt{\frac{I}{a^2} + \frac{I}{b^2}}$

Hence the dominant mode is TE₀₁₁.

(b) If $a > b > c$, $1/a < 1/b < 1/c$,

The lowest TM mode is TM₁₁₀ with $f_r = \frac{u'}{2} \sqrt{\frac{l}{a^2} + \frac{l}{b^2}}$

The lowest TE mode is TE₁₀₁ with $f_r = \frac{u'}{2} \sqrt{\frac{l}{a^2} + \frac{l}{c^2}} < \frac{u'}{2} \sqrt{\frac{l}{a^2} + \frac{l}{b^2}}$

Hence the dominant mode is TM₁₁₀.

(c) If $a = c > 1/b$, $1/a = 1/c < 1/b$,

The lowest TM mode is TM₁₁₀ with $f_r = \frac{u'}{2} \sqrt{\frac{l}{a^2} + \frac{l}{b^2}}$

The lowest TE mode is TE₁₀₁ with $f_r = \frac{u'}{2} \sqrt{\frac{l}{a^2} + \frac{l}{c^2}} < \frac{u'}{2} \sqrt{\frac{l}{a^2} + \frac{l}{b^2}}$

Hence the dominant mode is TE₁₀₁.

Prob. 12.30

$$f_r = 1.5 \times 10^{10} \sqrt{(m/3)^2 + (n/2)^2 + (p/4)^2} \text{ Hz}$$

$$f_{rTE011} = 15 \sqrt{0 + 1/4 + 1/16} = 8.385 \text{ GHz, etc.}$$

The resonant frequencies are listed below.

Modes	Resonant frequencies (GHz)
TE ₁₀₁	6.25
TE ₀₁₁	8.38
TM ₁₁₀	9.01
TM ₁₁₁	9.76

Prob. 12.31 $b = 2a$, $c = 3a$

$$f_r = \frac{u'}{2} \sqrt{(m/a)^2 + (n/2a)^2 + (p/3a)^2}, u' = \frac{c}{\sqrt{2.5}}$$

$$\frac{u'}{2a} = \frac{3x10^8}{2\sqrt{2.5x3x10^{-2}}} = 3.162x10^9$$

$$f_r = 3.162\sqrt{m^2 + n^2/4 + p^2/9} \text{ GHz}$$

Mode	f_r (GHz)
011	1.9
110	3.535
101	3.333
102	3.8
120, 103	4.472
022	3.8

Thus the lowest five modes have resonant frequencies at

1.9, 3.333, 3.535, 3.8, and 4.472 GHz

Prob. 12.32

$$f_r = \frac{u'}{2} \sqrt{1/a^2 + 1/c^2}$$

For cubical cavity, $a = b = c$

$$f_r = \frac{u'}{2a} \sqrt{2} \longrightarrow a = \frac{u'}{\sqrt{2}f_r} = \frac{3x10^8}{\sqrt{2}x2x10^9} = 10.61 \text{ mm}$$

$$\underline{a = b = c = 1.061 \text{ cm}}$$

Prob. 12.33 (a)

$$f_r = \frac{u'}{2} \sqrt{(m/a)^2 + (n/b)^2 + (p/c)^2}$$

$$a = b = c = 3.2 \text{ cm}, m=1, n=0, p=1, u' = c$$

$$f_r = \frac{3x10^8}{2x3.2x10^{-2}} \sqrt{l^2 + 0^2 + l^2} = \underline{6.629 \text{ GHz}}$$

(b)

$$Q = \frac{a}{3} \sqrt{\pi f_{r, \text{max}} \mu_0 \sigma_c} = \frac{3.2x10^{-2}}{3} \sqrt{\pi x 6.629 x 10^9 x 4\pi x 10^{-7} x 1.57 x 10^{-7}}$$

$$= 6.387$$

Prob. 12.34

$$f_r = \frac{c}{2a} \sqrt{m^2 + n^2 + p^2}$$

The lowest possible modes are TE₁₀₁, TE₀₁₁, and TM₁₁₀. Hence

$$f_r = \frac{c}{2a} \sqrt{2} \longrightarrow a = \frac{c}{f_r \sqrt{2}} = \frac{3 \times 10^8}{\sqrt{2} \times 3 \times 10^9} = 7.071 \text{ cm}$$

$$\underline{a = b = c = 7.071 \text{ cm}}$$

Prob. 12.35 This is a TM mode to z. From Maxwell's equations,

$$\nabla x E_s = -j\omega \mu H_s$$

$$H_s = -\frac{I}{j\omega \mu} \nabla x E_s = \frac{j}{\omega \mu} \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ 0 & 0 & E_{zs}(x, y) \end{vmatrix} = \frac{j}{\omega \mu} \left(\frac{\partial E_{zs}}{\partial y} a_x - \frac{\partial E_{zs}}{\partial x} a_y \right)$$

But

$$E_{zs} = 200 \sin 30\pi x \sin 30\pi y, \frac{I}{\omega \mu} = \frac{1}{6 \times 10^9 \times 4\pi \times 10^{-7}} = \frac{10^{-2}}{24\pi}$$

$$H_s = \frac{j10^{-2}}{24\pi} x 200 x 30\pi \left\{ \sin 30\pi x \cos 30\pi y a_x - \cos 30\pi x \sin 30\pi y a_y \right\}$$

$$\mathbf{H} = \operatorname{Re} (\mathbf{H}_s e^{j\omega t})$$

$$H = 2.5 \left\{ -\sin 30\pi x \cos 30\pi y a_x + \cos 30\pi x \sin 30\pi y a_y \right\} \sin 6 \times 10^9 \pi t \text{ A/m}$$

CHAPTER 13**P. E. 13.1**

$$r_{\max} = \frac{2d^2}{\lambda} = \frac{2(\lambda/100)^2}{\lambda} = \frac{\lambda}{5,000} \implies r = \frac{\lambda}{5} \text{ is in far field}$$

$$(a) H_{\phi s} = \frac{jI_o \beta \partial l \sin \theta e^{j\beta r}}{4\pi r}, \quad \beta r = \frac{2\pi}{\lambda} \cdot \frac{\lambda}{5} = 72^\circ$$

$$\lambda = \frac{2\pi c}{\omega} = \frac{2\pi \times 3 \times 10^8}{10^8} = 6\pi$$

$$H_{\phi s} = \frac{j(0.25)\left(\frac{2\pi}{\lambda}\right) \frac{\lambda}{100} \sin 30^\circ e^{-j72^\circ}}{4\pi\left(\frac{6\pi}{5}\right)} = 0.1652 e^{j18^\circ} r \text{ A/m}$$

$$H = \text{Im} (H_{\phi s} e^{j\omega t}) \quad \text{Im is used since } I = I_o \sin \omega t$$

$$= \underline{0.1628 \sin(10^8 + 18^\circ) a_\phi \text{ mA/m}}$$

$$(b) \quad \beta = \frac{2\pi}{\lambda} 200\lambda = 0^\circ$$

$$H_{\phi s} = \frac{j(0.25)\left(\frac{2\pi}{\lambda}\right) \frac{\lambda}{100} \sin 60^\circ e^{-j0^\circ}}{4\pi(6\pi \times 200)} = 0.2871 e^{j90^\circ} \mu Am$$

$$H = \text{Im} (H_{\phi s} a_\phi e^{j\omega t}) = \underline{0.2671 \sin(10^8 + 90^\circ) a_\phi \mu Am}.$$

P. E. 13.2

$$(a) l = \frac{\lambda}{4} = \underline{1.5m},$$

$$(b) I_o = \underline{83.3 \text{ mA}}$$

$$(c) P_{\text{rad}} = 36.56 \lambda, \quad P_{\text{rad}} = \frac{l}{2} (0.0833)^2 36.56$$

$$= \underline{126.8 \text{ mW.}}$$

$$(d) Z_L = 36.5 + j21.25,$$

$$\Gamma = \frac{36.5 + j21.25 - 75}{36.5 + j21.25 + 75} = 0.3874 \angle 140.3^\circ$$

$$S = \frac{I + 0.3874}{I - 0.3874} = \underline{\underline{2.265}}$$

P. E. 13.3

$$D = \frac{4\pi U_{\max}}{P_{rad}}$$

(a) For the Hertzian monopole

$$U(\theta, \phi) = \sin^2 \theta, 0 < \theta < \frac{\pi}{2}, 0 < \phi < 2\pi, U_{\max} = 1$$

$$P_{rad} = \int_{\theta=0}^{\frac{\pi}{2}} \int_{\phi=0}^{2\pi} \sin^2 \theta \sin \theta d\theta d\phi = \frac{4\pi}{3}$$

$$D = \frac{4\pi I}{4\pi \cancel{3}} = \underline{\underline{3}}$$

(b) For the $\frac{\lambda}{4}$ monopole,

$$U(\theta, \phi) = \frac{\cos^2(\frac{\pi}{2} \cos \theta)}{\sin^2 \theta}, U_{\max} = 1$$

$$P_{rad} = \int_{\theta=0}^{\frac{\pi}{2}} \int_{\phi=0}^{2\pi} \frac{\cos^2(\frac{\pi}{2} \cos \theta)}{\sin^2 \theta} \sin \theta d\theta d\phi = 2\pi (0.609)$$

$$D = \frac{4\pi (I)}{2\pi (0.609)} = \underline{\underline{3.28}}$$

P. E. 13.4

$$(a) P_{rad} = \eta_r P_m = 0.95(0.4)$$

$$D = \frac{4\pi U_{\max}}{P_{rad}} = \frac{4\pi (0.5)}{0.4 \times 0.95} = \underline{\underline{16.53}}$$

$$(b) D = \frac{4\pi (0.5)}{0.3} = \underline{\underline{20.94}}$$

P. E. 13.5

$$P_{rad} = \int_0^{\pi/2} \int_0^{2\pi} \sin\theta \sin\theta d\theta d\phi = \frac{\pi^2}{2}, \quad U_{max} = 1$$

$$D = \frac{4\pi(1)}{\pi^2/2} = \underline{\underline{2.546}}$$

P. E. 13.6

$$(a) f(\theta) = |\cos\theta| \cos\left[\frac{I}{2}(\beta d \cos\theta + \alpha)\right]$$

where $\alpha = \pi, \beta d = \frac{2\pi}{\lambda} \cdot \frac{\lambda}{2} = \pi$

$$f(\theta) = |\cos\theta| \cos\left[\frac{I}{2}(\pi \cos\theta + \pi)\right]$$

 unit pattern  group pattern

For the group pattern, we have nulls at

$$\frac{\pi}{2}(\cos\theta + I) = \frac{\pi}{2} \longrightarrow \theta = \frac{\pi}{2}$$

and maxima at

$$\frac{\pi}{2}(\cos\theta + I) = 0 \longrightarrow \cos\theta = -I$$

Thus the group pattern and the resultant patterns are as shown in Fig.13.15(a)

$$(b) f(\theta) = |\cos\theta| \cos\left[\frac{I}{2}(\beta d \cos\theta + \alpha)\right]$$

where $\alpha = \pi/2, \beta d = \pi$

$$f(\theta) = |\cos\theta| \cos\left[\frac{I}{2}(\pi \cos\theta - \pi/2)\right]$$

 unit pattern  group pattern

For the group pattern, the nulls are at

$$\frac{\pi}{4}(\cos\theta - I) = \pm \frac{\pi}{2}, \pm \frac{3\pi}{2} \longrightarrow \theta = 180^\circ$$


and maxima at

$$\cos\theta - 1 = 0 \quad \longrightarrow \quad \theta = 0$$


Thus the group pattern and the resultant patterns are as shown in Fig.13.15(b)

P. E. 13.7

(a)

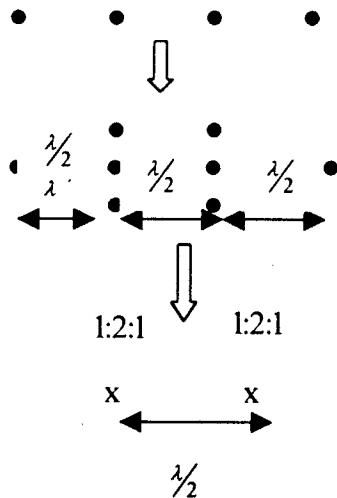

Thus, we take a pair at a time and multiply the patterns as shown below.

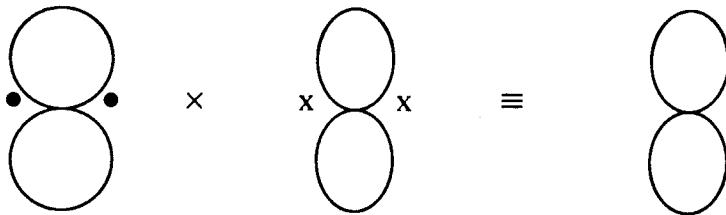

The group pattern is the normalized array factor, i.e.

$$(AF)_n = \frac{1}{\sum} \left| 1 + Ne^{j\psi} + \frac{N(N-1)}{2!} e^{j2\psi} + \frac{N(N-1)(N-2)}{3!} e^{j3\psi} + \dots + e^{j(N-1)\psi} \right|$$

$$\text{where } \sum = \sum_{i=1}^{N-1} \binom{N}{i} = 1 + N + \frac{N-1}{2!} + \frac{N(N-1)(N-2)}{3!} + \dots$$

$$= (1+1)^{N-1} = 2^{N-1}$$

$$(AF)_n = \frac{I}{2^{N-1}} |1 + e^{j\psi}|^{N-1} = \frac{I}{2^{N-1}} \left| e^{j\psi/2} \left(e^{-j\psi/2} + e^{j\psi/2} \right) \right|^{N-1}$$

$$= \frac{I}{2^{N-1}} \left| 2 \cos \frac{\psi}{2} \right|^{N-1} = \underline{\underline{\left| \cos \frac{\psi}{2} \right|^{N-1}}}$$

P. E. 13.8

$$A_e = \frac{\lambda^2}{4\pi} G_d, \quad \lambda = \frac{c}{f} = \frac{3 \times 10^8}{10^8} = 3m$$

For the Hertzian dipole,

$$G_d = 1.5 \sin^2 \theta$$

$$A_e = \frac{\lambda^2}{4\pi} (1.5 \sin^2 \theta)$$

$$A_{e,\max} = \frac{1.5\lambda^2}{4\pi} = \frac{1.5 \times 9}{4\pi} = \underline{\underline{1.074 \text{ m}^2}}$$

By definition,

$$\begin{aligned} P_r = A_e P_{ave} &\longrightarrow P_{ave} = \frac{P_r}{A_e} = \frac{3 \times 10^{-6}}{1.074} \\ &= \underline{\underline{2.793 \mu \text{W/m}^2}} \end{aligned}$$

P. E. 13.9

$$\begin{aligned} \text{(a)} \quad G_d &= \frac{4\pi r^2 P_{ave}}{P_{rad}} = \frac{4\pi r^2 \frac{I}{2} \frac{E^2}{\eta}}{P_{rad}} = \frac{2\pi r^2 E^2}{\eta P_{rad}} \\ &= \frac{2\pi \times 400 \times 10^6 \times 144 \times 10^{-6}}{120\pi \times 100 \times 10^3} = 2.16 \end{aligned}$$

$$G = 10 \log_{10} G_d = \underline{\underline{3.34 \text{ dB}}}$$

$$\text{(b)} \quad G = \eta_r G_d = 0.98 \times 2.16 = \underline{\underline{2.117}}$$

P. E. 13.10

$$r = \left[\frac{\lambda^2 G_d^2 \sigma}{(4\pi)^3} \frac{P_{rad}}{P_r} \right]^{1/4}$$

$$\text{where } \lambda = \frac{c}{f} = \frac{3 \times 10^8}{6 \times 10^9} = 0.05m$$

$$A_e = 0.7\pi a^2 = 0.7\pi (1.8)^2 = 7.125 \text{ m}^2$$

$$G_d = \frac{4\pi A_e}{\lambda^2} = \frac{4\pi (7.125)}{25 \times 10^{-4}} = 3.581 \times 10^4$$

$$r = \left[\frac{5 \times 10^{-4} \times (3.581)^2 \times 10^4 \times 5 \times 60 \times 10^3}{(4\pi)^3 \times 0.26 \times 10^{-3}} \right]^{1/4}$$

$$= 1270 \text{ m} = 0.857 \text{ nm}$$

At $r = \frac{r_{\max}}{2} = 635 \text{ m}$,

$$P = \frac{G_d P_{rad}}{4\pi r^2} = \frac{3.581 \times 10^4 \times 60 \times 10^3}{4\pi (635)^2} = \underline{\underline{42.4 \text{ W/m}^2}}$$

Prob. 13.1

Using vector transformation,

$$A_{rs} = A_{xs} \sin\theta \cos\phi, \quad A_{\theta s} = A_{xs} \cos\theta \cos\phi, \quad A_{\phi s} = A_{xs} \sin\phi$$

$$A_s = \frac{50e^{-j\beta r}}{r} (\sin\theta \cos\phi a_r + \cos\theta \cos\phi a_\theta - \sin\phi a_\phi)$$

$$\begin{aligned} \frac{\nabla \times A_s}{\mu} &= H_s = \frac{-100 \cos\theta \sin\phi}{\mu r^2 \sin\theta} e^{-j\beta r} a_r - \frac{50}{\mu r^2} (\sin\theta + j\beta r) \sin\phi e^{-j\beta r} a_\theta \\ &- \frac{50}{\mu r^2} \cos\theta \cos\phi (1 + j\beta r) e^{-j\beta r} a_\phi \end{aligned}$$

At far field, only $\frac{1}{r}$ term remains. Hence

$$H_s = \frac{-j50}{\mu r} \beta e^{-j\beta r} (\sin\phi a_\theta + \cos\theta \cos\phi a_\phi)$$

$$E_s = -\eta a_r \times H_s = \frac{-j50\beta\eta e^{-j\beta r}}{\mu r} (\sin\phi a_\phi - \cos\theta \cos\phi a_\theta)$$

$$H = \operatorname{Re}[H_s e^{j\omega t}] = \frac{-50}{\mu r} \beta \sin(\omega t - \beta r) (\sin\phi a_\theta + \cos\theta \cos\phi a_\phi)$$

$$E = \operatorname{Re}[E_s e^{j\omega t}] = \frac{-50\eta\beta}{\mu r} \sin(\omega t - \beta r) (-\sin\phi a_\phi + \cos\theta \cos\phi a_\theta)$$

Prob. 13.7

This is a monopole antenna

$$\lambda = \frac{c}{f} = \frac{3 \times 10^8}{1.5 \times 10^6} = 200$$

$l \ll \lambda$, hence it is a Hertzian monopole.

$$R_{rad} = \frac{l}{2} 80\pi^2 \left(\frac{dl}{\lambda} \right)^2 = 40\pi^2 \left(\frac{l}{200} \right)^2 = 9.87 \text{ m}\Omega$$

$$P_{rad} = P_t = \frac{l}{2} I_o R_{rad}$$

$$I_o^2 = \frac{2P_t}{R_{rad}} = \frac{8}{9.87 \times 10^{-3}} = 810.54$$

$$\underline{I_o = 28.47 A}$$

Prob. 13.8

Change the limits in Eq. (13.16) to $\pm \frac{l}{2}$ i.e.

$$\begin{aligned} A_s &= \frac{\mu I_o e^{j\beta z \cos\theta}}{4\pi r} \frac{(j\beta \cos\theta \cos\beta t + \beta \sin\beta t)}{-\beta^2 \cos^2\theta + \beta^2} \Big|_{-\frac{l}{2}}^{\frac{l}{2}} \\ &= \frac{\mu I_o e^{j\beta r}}{2\pi r} \frac{1}{\beta \sin^2\theta} \left[\sin \frac{\beta l}{2} \cos \left(\frac{\beta l}{2} \cos\theta \right) - \cos\theta \cos \frac{\beta l}{2} \sin \left(\frac{\beta l}{2} \cos\theta \right) \right] \end{aligned}$$

But $B = \mu H = \nabla \times A$

$$H_{\phi s} = \frac{1}{\mu r} \left[\frac{\partial}{\partial r} (r A_\theta) - \frac{\partial A_r}{\partial \theta} \right],$$

where $A_o = -A_z \sin\theta$, $A_r = A_z \cos\theta$


$$H_{\phi s} = \frac{I_o}{2\pi r} \frac{e^{-j\beta r}}{\beta} \left(\frac{j\beta}{\sin\theta} \right) \left[\sin \frac{\beta l}{2} \cos \left(\frac{\beta l}{2} \cos\theta \right) - \cos\theta \cos \frac{\beta l}{2} \sin \left(\frac{\beta l}{2} \cos\theta \right) \right] + \frac{I_o}{2\pi r^2} e^{-j\beta r} (\dots)$$

For far field, only the $\frac{l}{r}$ -term remains. Hence


$$H_{fs} = \frac{jI_o}{2\pi r} e^{-j\beta r} \frac{\left[\sin \frac{\beta l}{2} \cos \left(\frac{\beta l}{2} \cos \theta \right) - \cos \theta \cos \frac{\beta l}{2} \sin \left(\frac{\beta l}{2} \cos \theta \right) \right]}{\sin \theta}$$

$$(b) f(\theta) = \frac{\cos \left(\frac{\beta l}{2} \cos \theta \right) - \cos \frac{\beta l}{2}}{\sin \theta}$$


For $l = \lambda$, $f(\theta) = \frac{\cos(\pi \cos \theta) + 1}{\sin \theta}$

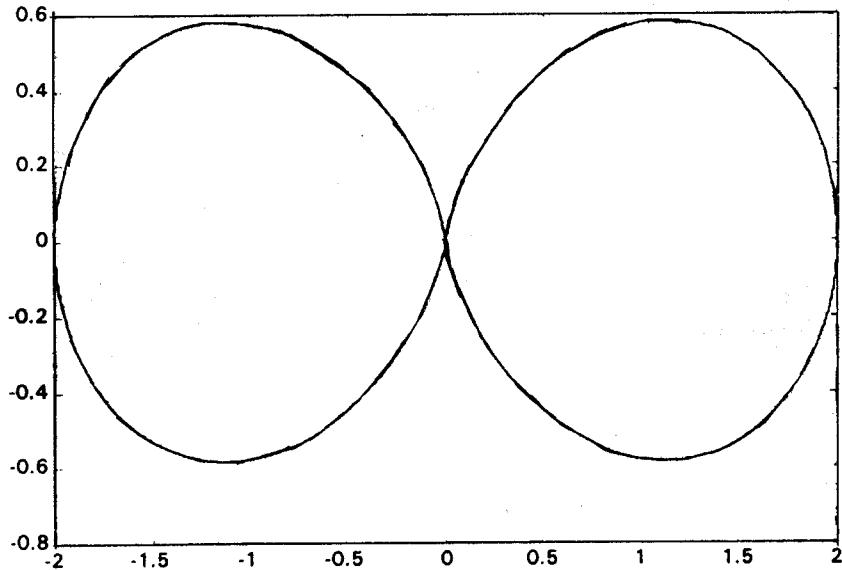

$$\text{For } l = \frac{3\lambda}{2}, f(\theta) = \frac{\cos\left(\frac{3\pi}{2}\cos\theta\right)}{\sin\theta}$$

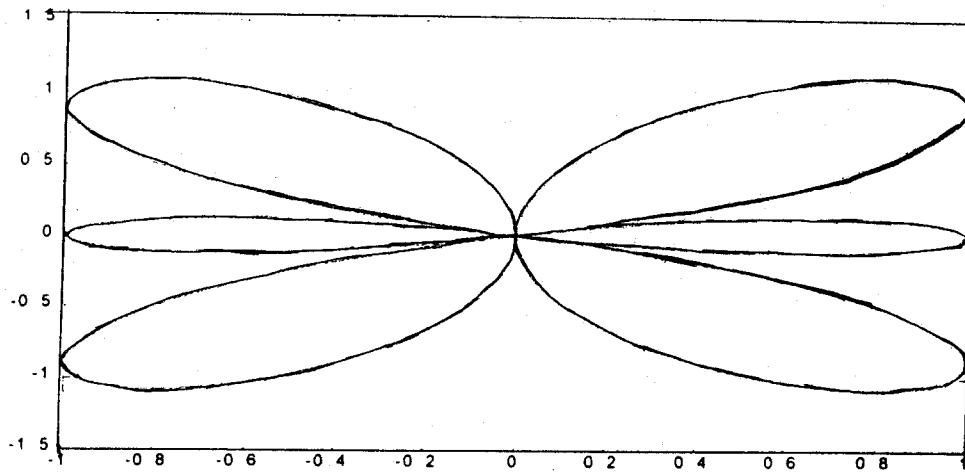

$$\text{For } l = 2\lambda, f(\theta) = \frac{\cos(2\pi\cos\theta) - l}{\sin\theta}$$

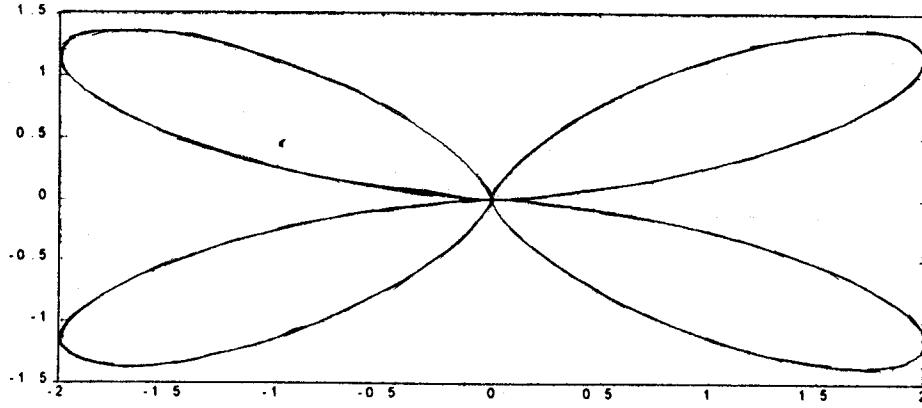

Prob. 13.9

(a) From Prob. 13.4,

$$E_{0x} = \frac{j\eta I_o}{8\pi r} \beta l e^{-j\beta r} \sin\theta, \quad H_{0x} = \eta E_{0x}$$

$$(b) D = \frac{U_{\max}}{U_{ave}}$$

$$U(\theta, \phi) = \sin^2 \theta, \quad U_{\max} = I$$

$$U_{ave} = \frac{P_{rad}}{4\pi} = \frac{I}{4\pi} \int_{\theta=0}^{\pi} \int_{\phi=0}^{2\pi} \sin^3 \theta d\theta d\phi$$

$$= \frac{2\pi}{4\pi} \left(\frac{4}{3} \right) = \frac{2}{3}$$

$$D = \frac{I}{\cancel{2}/3} = \underline{\underline{1.5}}$$

Prob. 13.10

$$(a) P_{rad} = \int P_{rad} \cdot dS = P_{ave} \cdot 2\pi r^2 \quad (\text{hemisphere})$$

$$P_{ave} = \frac{P_{rad}}{2\pi r^2} = \frac{200 \times 10^3}{2\pi (50 \times 10^6)} = 12.73 \mu W/m^2$$

$$P_{ave} = \underline{\underline{12.73 a_r \mu W / m^2}}.$$

$$(b) P_{ave} = \frac{(E_{\max})^2}{2\eta}$$

$$E_{\max} = \sqrt{2\eta P_{ave}} = \sqrt{240\pi \times 12.73 \times 10^{-6}}$$

$$= \underline{\underline{0.098 V/m}}$$

Prob. 13.11


$$(a) \lambda = \frac{c}{f} = \frac{3 \times 10^8}{100 \times 10^6} = 3m$$

$$E_{\max} = \frac{\eta \pi I_o S}{r \lambda^2} \rightarrow I_o = \frac{E_{\max} r \lambda^2}{\eta \pi S}$$

$$I_o = \frac{50 \times 10^{-3} \times 3 \times 3^2}{120 \eta^2 \pi (0.2)^2 100} = 90.71 \mu A$$

Prob. 13.13

For $l = \frac{3\lambda}{2}$ and $l = \lambda$, the plots are the upper portions of those in Prob. 13.8(b). For $l = \frac{5\lambda}{8}$, the plot is as shown below.

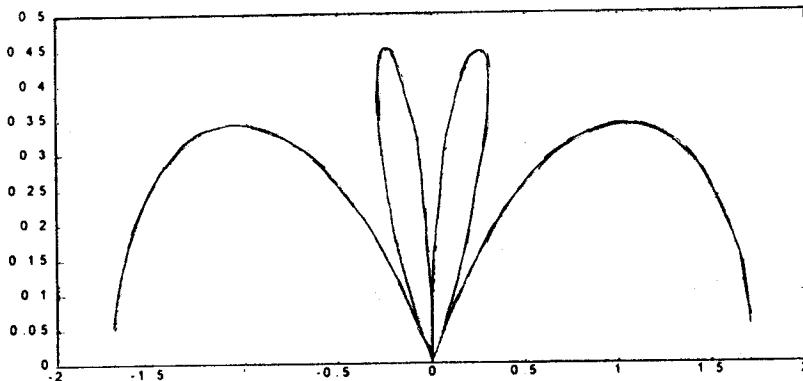**Prob. 13.14**

$$P_{ave} = \frac{|E_s|^2}{2\eta} a_r = \frac{25 \sin^2 2\theta}{2\eta r^2} a_r$$

$$P_{rad} = \frac{25}{2\eta} \int \int (2 \sin \theta \cos \theta)^2 \sin \theta d\theta d\phi$$

$$P_{rad} = \frac{25}{240\pi} (2\pi) \int_0^\pi 4 \sin^2 \theta \cos^2 \theta d(-\cos \theta)$$

$$= \frac{25}{120} \int_0^\pi (\cos^4 \theta - \cos^2 \theta) d(-\cos \theta)$$

$$= \frac{25}{120} \left(\frac{\cos^5 \theta}{5} - \frac{\cos^3 \theta}{3} \right) \Big|_0^\pi = \frac{25}{120} \left(-\frac{2}{5} + \frac{2}{3} \right)$$

$$P_{rad} = \underline{\underline{55.55 \text{ mW}}}$$

Prob. 13.15

$$f(\theta) = |\cos \theta \cos \phi|$$

For the vertical pattern, $\phi = 0 \longrightarrow$

$$f(\theta) = |\cos \theta| \text{ which is sketched below.}$$

Prob. 13.18


$$\text{From Prob. 13.8, } E_{\theta s} = \frac{j\eta I_o e^{-j\beta r} \left[\cos\left(\frac{\beta l}{2} \cos\theta\right) - \cos\frac{\beta l}{2} \right]}{2\pi r \sin\theta}$$

$$\text{For } l = \lambda, \frac{\beta l}{2} = \frac{2\pi}{\lambda} \cdot \frac{\lambda}{2} = \pi$$

$$|E_{\theta s}| = \frac{\eta I_o [\cos(\pi \cos\theta) + 1]}{2\pi r \cos\theta}$$

$$f(\theta) = \frac{|E_{\theta s}|}{|E_{\theta s}|_{\max}} = \frac{\cos(\pi \cos\theta) + 1}{\sin\theta}$$

It is sketched below.

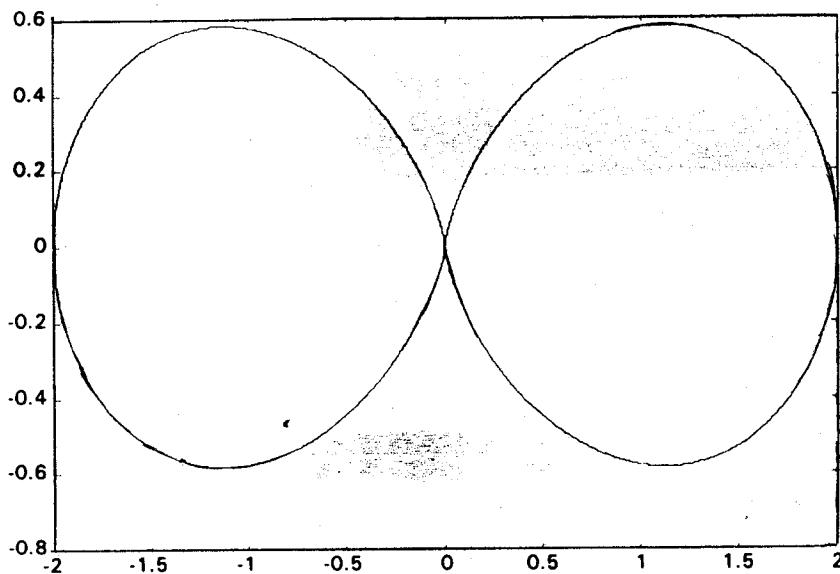**Prob. 13.19**

$$(a) E_{\theta s} = \frac{j\eta I_o \beta dl}{4\pi r} \sin\theta e^{-j\beta r}$$

$$R_{rad} = 80\pi^2 \left(\frac{dl}{\lambda} \right)^2$$

$$G_{\phi} = \frac{4\pi r^2 P_{ave}}{P_{rad}} = \frac{\frac{I}{2\eta} |E_{\phi s}|^2}{\frac{I}{2} I_o^2 R_{rad}}$$

$$= \frac{4\pi r^2}{I_o^2} \cdot \frac{I}{80\pi^2} \left(\frac{\lambda}{dl} \right)^2 \cdot \frac{\frac{I}{\eta} \frac{\eta^2 I_o^2 \beta^2 (dl)^2 \sin^2 \theta}{16\pi^2 r^2}}{}$$

$$G_{\phi} = \underline{\underline{1.5 \sin^2 \theta}}$$

$$(b) D = G_{\phi, \max} = \underline{\underline{1.5}}$$

$$(c) A_e = \frac{\lambda^2}{4\pi} G_{\phi} = \frac{\underline{\underline{1.5 \lambda^2 \sin^2 \theta}}}{4\pi}$$

$$(d) R_{rad} = 80\pi^2 \left(\frac{I}{16} \right)^2 = \underline{\underline{3.084}}$$

Prob. 13.20

$$(a) E_{\phi s} = \frac{120\pi^2 I_o}{r} \frac{S}{\lambda^2} \sin \theta e^{-j\beta r}$$

$$R_{rad} = \frac{320\pi^4 S^2}{\lambda^4}$$

$$G_d = \frac{4\pi U(\theta, \phi)}{P_{rad}} = \frac{4\pi r^2 P_{ave}}{\frac{I}{2} I_o R_{rad}} = \frac{8\pi r^2}{I_o^2} \cdot \frac{I}{2\eta} \frac{|E_{\phi s}|^2}{R_{rad}}$$

$$= \frac{8\pi r^2}{I_o^2} \cdot \frac{I}{2\eta} \cdot 14400\pi^4 \frac{I_o^2}{r^2} \frac{S^2}{\lambda^4} \sin^2 \theta \frac{\lambda^2}{320\pi^4 S^2}$$

$$G_d = \underline{\underline{1.5 \sin^2 \theta}}$$

$$(b) \underline{\underline{D = 1.5}}$$

$$(c) A_e = \frac{\lambda^2 G_d}{4\pi} = \frac{\lambda^2}{4\pi} \underline{\underline{1.5 \sin^2 \theta}}$$

$$(d) S = \pi a^2 = \frac{\pi d^2}{4} = \frac{320\pi^6}{(576)^2}$$

$$R_{rad} = \underline{\underline{0.927 \Omega}}$$

Prob. 13.21

$$R_{ac} = \frac{l}{\sigma S}, \quad S = \pi a^2$$

$$R_{ac} = \frac{l}{\sigma \pi a^2}$$

$$R_l = R_{ac} = \frac{a}{2\delta} \quad R_{dc} = \frac{a}{2\delta} \frac{l}{\sigma \pi a^2}$$

$$\text{Now } \delta = \sqrt{\frac{\pi f \mu}{\sigma}} = \sqrt{\frac{\pi \times 15 \times 10^6 \times 4\pi \times 10^7}{5.8 \times 10^7}} = 1.01 \times 10^{-3} \text{ m}$$

Alternatively, since $\delta \ll a$, current is confined to a cylindrical shell of thickness δ . Hence

$$R_l = R_{ac} = \frac{l}{\sigma (2\pi a)\delta}$$

$$l = \frac{\lambda}{2} = \frac{c}{2f} = \frac{3 \times 10^8}{2 \times 15 \times 10^6} = 10 \text{ m}$$

$$R_l = \frac{10}{2 \times 1.01 \times 5.8 \times 10^7 \times \pi \times 1.3 \times 10^{-2}} = 0.0209 \Omega$$

$$R_{rad} = 73 \Omega$$

$$\eta_r = \frac{R_{rad}}{R_{rad} + R_l} = \frac{73}{73.0209} = \underline{\underline{99.97\%}}$$

Prob. 13.22

$$(a) U_{max} = 1$$

$$U_{ave} = \frac{P_{rad}}{4\pi} = \frac{\int u d\Omega}{4\pi}$$

$$= \frac{1}{4\pi} \int \int \sin^2 2\theta \sin \theta d\theta d\phi$$

$$= \frac{1}{4\pi} (2\pi) \int_0^\pi (2 \sin \theta \cos \theta)^2 d(-\cos \theta)$$

$$= 2 \int_0^\pi (\cos^4 \theta - \cos^2 \theta) d(\cos \theta)$$

$$= 2 \left[\frac{\cos^5 \theta}{5} - \frac{\cos^3 \theta}{3} \right] \Big|_0^\pi$$

$$= 2 \left[-\frac{2}{5} + \frac{2}{3} \right] = \frac{8}{15}$$

$$U_{ave} = \underline{\underline{0.5333}}$$

$$D = \frac{U_{max}}{U_{ave}} = \underline{\underline{1.875}}$$

(b) $U_{max} = 4$

$$U_{ave} = \frac{1}{4\pi} \int u d\Omega = \frac{4}{4\pi} \int \int \frac{1}{\sin^2 \theta} d\theta d\phi$$

$$= \frac{1}{\pi} \int_0^\pi d\phi \int_{\gamma_3}^{\gamma_2} \frac{d(-\cos \theta)}{1 - \cos^2 \theta} = \frac{\pi}{\pi} \int \frac{dv}{u^2 - 1} = \ln \frac{1-u}{1+u} \Big|_{\gamma_3}^{\gamma_2}$$

$$= \ln 1 - \ln \frac{0.5}{1.5} = \ln 3$$

$$U_{ave} = \underline{\underline{1.099}}$$

$$D = \frac{U_{max}}{U_{ave}} = \frac{4}{1.099} = \underline{\underline{3.641}}$$

(c) $U_{max} = 2$

$$\begin{aligned} U_{ave} &= \frac{1}{4\pi} \int u d\Omega = \frac{1}{4\pi} \int \int 2 \sin^2 \theta \sin^2 \phi \sin \theta d\theta d\phi \\ &= \frac{1}{2\pi} \int_0^\pi \sin^2 \phi d\phi \int_0^\pi (1 - \cos^2 \theta) d(-\cos \theta) \\ &= \frac{1}{2\pi} \cdot \frac{\pi}{2} \left(\frac{\cos^3 \theta}{3} - \cos \theta \right) \Big|_0^\pi = \frac{1}{4} \left[-\frac{2}{3} + 2 \right] = \frac{1}{3} \end{aligned}$$

$$U_{ave} = \underline{\underline{0.333}}$$

$$D = \frac{U_{max}}{U_{ave}} = \underline{\underline{6}}$$

$$= \frac{10}{4\pi} \int_0^{\frac{\pi}{2}} \sin^2 \frac{\phi}{2} d\phi \int_0^{\pi} (\cos^2 \theta) d(-\cos \theta)$$

$$= \frac{10}{4\pi} \int_0^{\frac{\pi}{2}} \frac{1}{2} (1 - \cos \phi) d\phi \left(-\frac{\cos^3 \theta}{3} \right) \Big|_0^{\pi}$$

$$= \frac{10}{4\pi} \left(\frac{2}{3} \right) \left(\frac{1}{2} \right) (\phi + \sin^2 \phi) \Big|_0^{\pi} = \frac{10}{12\pi} \left(\frac{\pi}{2} - 1 \right)$$

$$U_{ave} = 0.1514$$

$$G_{d,max} = \frac{U}{U_{ave}} = \underline{\underline{66.05 \cos^2 \theta \cos^2 \frac{\phi}{2}}}$$

$$D = G_{d,max} = \underline{\underline{66.05}}$$

Prob. 13.24

$$(a) P_{rad} = \int P_{ave} dS = \frac{1}{2\eta} \int |E_{fs}|^2 \partial S$$

$$= \frac{0.04}{16\pi^2} \left(\frac{1}{2\pi} \right) \int \int \frac{\cos^4 \theta}{r^2} r^2 \sin \theta d\theta d\phi$$

$$= \frac{0.04}{16\pi^2} \left(\frac{1}{240\pi} \right) (2\pi) \int_0^{\pi} \cos \theta d(-\cos \theta) \cdot 10^6$$

$$= \frac{0.04}{16\pi^2} \frac{10^6}{120} \left(-\frac{\cos^5 \theta}{5} \right) \Big|_0^{\pi} = \frac{10^4}{480\pi^2} \cdot \frac{2}{5}$$

$$P_{rad} = \underline{\underline{0.8443 \text{ W}}}$$


$$(b) G_d = \frac{4\pi U(\theta, \phi)}{P_{rad}} = \frac{4\pi r^2 P_{ave}}{P_{rad}}$$

$$= 4\pi r^2 \cdot \frac{0.04 \cos^4 \theta}{16\pi^2 r^2} \cdot \frac{10^6}{240\pi} \cdot \frac{12\pi^2}{100}$$

$$G_d = 5 \cos^4 \theta$$

Since $\cos 60^\circ = \frac{1}{2}$,

(d) The group pattern is sketched below.

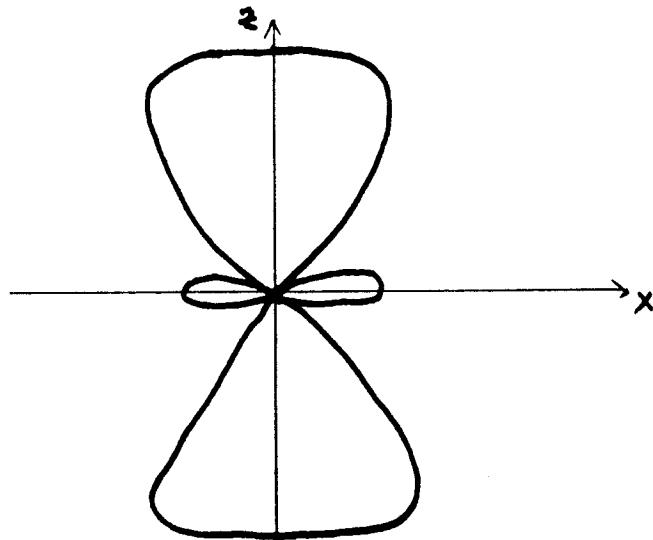

Prob. 13.27

(a) The group pattern is

$$f(\theta) = \cos\left[\frac{I}{2}(\beta d \cos\theta + \alpha)\right]$$

$$f(\theta) = \cos\left[\frac{I}{2}\left(\frac{2\pi}{\lambda} \cdot \frac{\lambda}{2} \cos\theta + \frac{\pi}{2}\right)\right]$$

$$= \cos\frac{\pi}{4}\left(\cos\frac{\pi}{4}(\cos\theta + I)\right)$$

$$\cos\frac{\pi}{4}(\cos\theta + I) = 0 \longrightarrow \frac{\pi}{4}(\cos\theta + I) = \pm\frac{\pi}{2}, \pm\frac{3\pi}{2}$$

$$\text{or } \cos\theta = I \longrightarrow \theta = 0$$

Maximum and minimum occur when


$$\frac{d}{d\theta}\left[\cos\frac{\pi}{4}(\cos\theta + I)\right] = 0$$

$$\sin\theta \sin\frac{\pi}{4}(I + \cos\theta) = 0$$

$$\sin\theta = 0 \quad \theta = -I \quad \text{or} \quad \theta = 180^\circ$$

Alternatively $f(\theta)$ can be plotted using Matlab or Maple.

The group pattern is shown below.

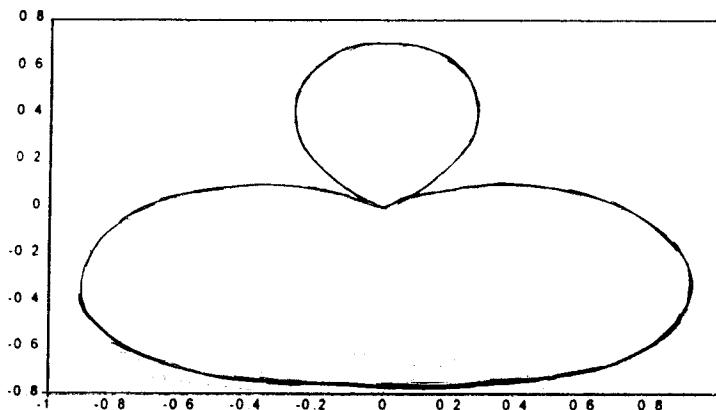**Prob. 13.28**

$$f(\theta) = \cos\left[\frac{I}{2}(\beta d \cos\theta + \alpha)\right]$$

(a) $\alpha = \pi/2, \beta d = \frac{2\pi}{\lambda}, \lambda = 2\pi$

$$f(\theta) = \cos\left(\pi \cos\theta + \pi/4\right)$$

Nulls occur at $\pi \cos\theta + \pi/4 = \pm \frac{\pi}{2}, \pm \frac{3\pi}{2}, \dots$ or $\theta = 75.5^\circ, 138.6^\circ$

Maxima occur at $\frac{\partial f}{\partial \theta} = 0 \rightarrow \sin\theta = 0 \rightarrow \theta = 0^\circ, 180^\circ$

Or $\sin\left(\pi \cos\theta + \frac{\pi}{4}\right) = 0 \rightarrow \theta = 41.4^\circ, 104.5^\circ$

With $f_{\max} = 0.71, I$.

Hence the group pattern is sketched below.


$$(c) \alpha = 0, \beta d = \frac{2\pi}{\lambda} \cdot \frac{3\lambda}{4} = \frac{3\pi}{2}$$

$$f(\theta) = \left| \cos\left(\frac{3\pi}{4} \cos\theta\right) \right|$$

It has nulls at $\frac{3\pi}{4} \cos\theta = \pm \frac{\pi}{2}, \pm \frac{3\pi}{2}, \dots \rightarrow \theta = 48.2^\circ, 131.8^\circ$

It has maxima and minima at $\frac{df}{d\theta} = 0 \rightarrow \sin\theta \sin\left(\frac{3\pi}{4} \cos\theta\right) = 0$

i.e. $\theta = 0^\circ, 180^\circ \rightarrow f(\theta) = 0.71, 1$

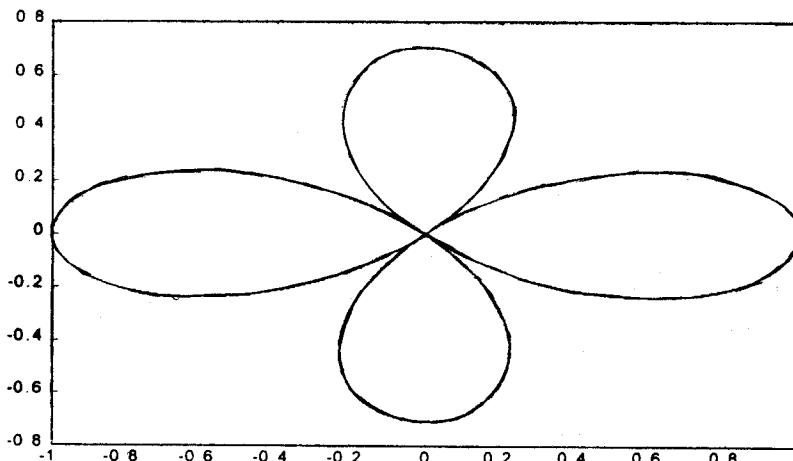

Prob. 13.29

$$(a) \text{ For } N = 2, f(\theta) = \cos\left[\frac{1}{2}(\beta d \cos\theta + \alpha)\right]$$

$$\alpha = 0, d = \frac{\lambda}{4}$$

$$f(\theta) = \cos\left[\frac{1}{2}\left(\frac{2\pi}{\lambda} \cdot \frac{\lambda}{4} \cos\theta + 0\right)\right] = \cos\left(\frac{\pi}{4} \cos\theta\right)$$

Maxima and minima occur at


$$\frac{d}{d\theta} \left[\cos\left(\frac{\pi}{4} \cos\theta\right) \right] = 0$$

$$\sin\theta \sin\left(\frac{\pi}{4} \cos\theta\right) = 0$$

$$\sin\theta = 0 \rightarrow \theta = \pi, 0 \text{ and } f(\theta) = 0.707$$

$$= \cos\left(\frac{\pi}{2}\cos\theta\right) \cos\left(\frac{\pi}{4}\cos\theta\right)$$

The plot is shown below.

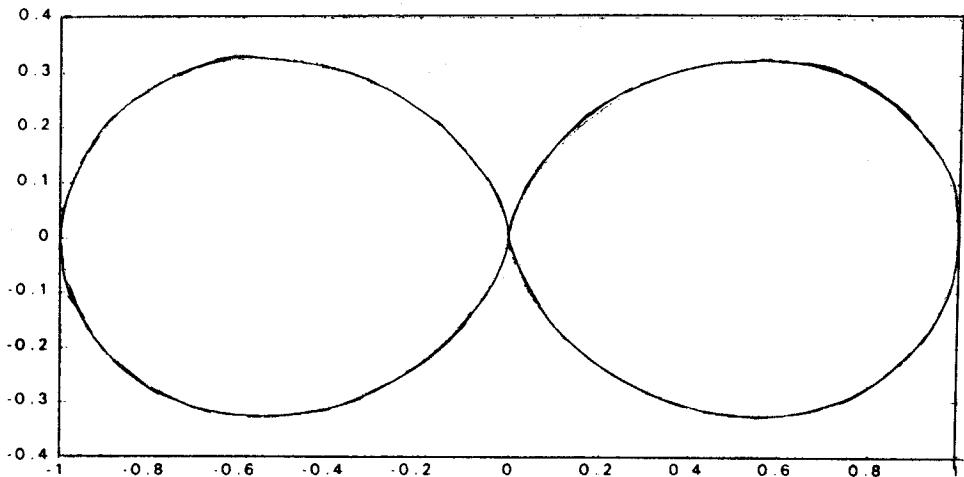


Prob. 13.30

- (a) The given array is replaced by \oplus
where + represents


$$\frac{\lambda}{2}$$

Thus the resultant pattern is obtained as follows.

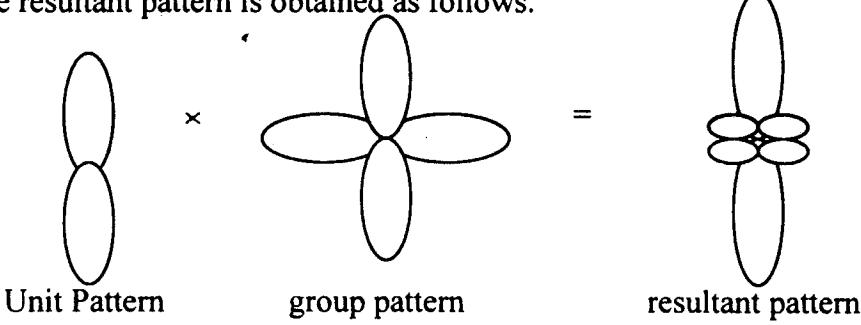

- (b) The array is replaced by \oplus
where + stands for

Thus the resultant pattern is obtained as shown.

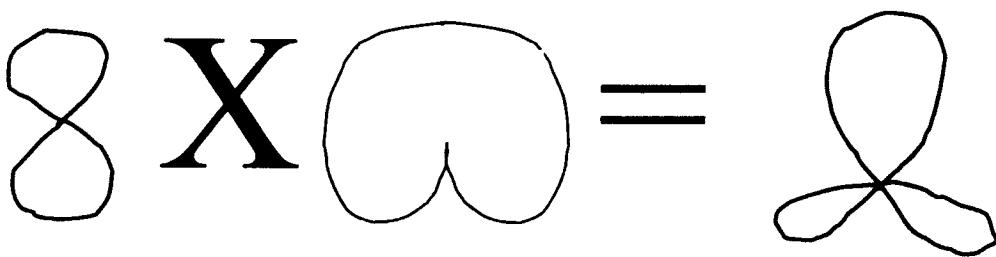**Prob. 13.31**

$$A_e = \frac{\lambda^2}{4\pi} G_d$$

where $G_d = \frac{4\pi u}{U_{ave}} = \frac{4\pi U}{P_{rad}}$

But $E_{\phi s} = \frac{\eta \pi I_o S}{r \lambda^2} \sin \theta e^{-j\beta r}$

$$U = r^2 P_{ave} = \frac{r^2 |E_{\phi s}|^2}{2\eta} = \frac{\eta \pi^2 I_o^2 S^2 \sin^2 \theta}{\lambda^4}$$

$$P_{rad} = \int P_{ave} dS = \frac{\eta \pi^2 I_o^2 S^2}{\lambda^4} \int \int \sin^3 \theta \partial \theta \partial \phi$$

$$= \frac{\eta \pi^2 I_o^2 S^2}{\lambda^4} \cdot (2\pi) \left(\frac{4}{3}\right)$$

$$G_d = 4\pi \frac{\frac{\lambda^4}{\eta \pi^2 I_o^2 S^2} \cdot \frac{8\pi}{3}}{\lambda^4} = \frac{3}{2} \sin^2 \theta$$

$$\lambda = \frac{c}{f} = \frac{3 \times 10^8}{10^8} = 3m,$$

$$A_e = \frac{3\lambda^2}{8\pi} \sin^2 \theta = \frac{3 \times 9}{8\pi} \left(\frac{1}{2}\right)^2 = \underline{\underline{0.2686}}$$

Prob. 13.32

$$A_e = \frac{P_r}{P_{ave}} = \frac{P_r}{E_r / 2\eta} = \frac{2\eta P_r}{E_r}$$

$$= \frac{2 \times 120\pi \times 2 \times 10^{-6}}{25 \times 10^2 \times 10^{-6}} = \frac{48\pi}{250} = \underline{\underline{0.6031}}$$

Prob. 13.33

$$(a) \quad A_{cr} = \frac{\lambda^2}{4\pi} G_{dr}, \quad A_{ct} = \frac{\lambda^2}{4\pi} G_{dt}$$

$$P_r = G_{dr} G_{dt} \left(\frac{\lambda^2}{4\pi r} \right) P_t = \left(\frac{4\pi}{\lambda^2} A_{er} \right) \left(\frac{4\pi}{\lambda^2} A_{et} \right) \left(\frac{\lambda^2}{4\pi r} \right) P_t$$

$$\text{or } \frac{P_r}{P_t} = \frac{A_{er} A_{et}}{\lambda^2 r^2}$$

$$(b) \quad P_{r,\max} = \frac{A_{cr} A_{ct}}{\lambda^2 r^2} P_t, \quad A_{cr} = A_{ct} = \frac{\lambda^2}{4\pi} (1.68)$$

$$\lambda = \frac{c}{f} = \frac{3 \times 10^8}{100 \times 10^6} = 3m,$$

$$P_{r,\max} = \frac{(0.13\lambda^2)^2 (80)}{\lambda^2 (10^3)^2} = \underline{\underline{12.8 \mu W}}$$

Prob. 13.34

$$P_r = P_t A_e = P_t \frac{\lambda^2}{4\pi} G_d$$

$$P_{r,\max} = P_t \frac{\lambda^2}{4\pi} G_{d,\max}$$

But $G_{d,\max} = D = 1.64$ and

$$P_t = \frac{E^2}{2\eta}, \quad \lambda = \frac{c}{f} = \frac{3 \times 10^8}{60 \times 10^6} = 5m$$

$$P_{r,\max} = \frac{E^2 \lambda^2 D}{8\pi\eta} = \frac{9 \times 10^{-6} \times 25 \times 1.64}{8\pi(120\pi)}$$

$$= \underline{\underline{38.9 \text{ nW}}}$$

Prob. 13.38

$$G_{dt} = 25 = 10 \log_{10} G_{dt} \rightarrow G_{dt} = 10^{2.5} = 316.23$$

$$G_{dr} = 10^3 = 1000$$

$$P_r = 316.23 \times 10^3 \left(\frac{1}{4\pi \times 1.5 \times 10^3} \cdot \frac{3 \times 10^8}{1.5 \times 10^9} \right) = \underline{\underline{7.12 \text{ mW}}}$$

Prob. 13.39

$$(a) P_i = \frac{|E|^2}{2\eta_o} = \frac{P_{rad}G_d}{4\pi r^2} \rightarrow |E_i| = \sqrt{\frac{240\pi P_{rad}G_d}{4\pi r^2}}$$

$$|E_i| = \frac{1}{r} \sqrt{60 P_{rad} G_d} = \frac{1}{120 \times 10^6} \sqrt{60 \times 200 \times 10^3 \times 3500}$$

$$= \underline{\underline{1.708 \text{ V/m}}}$$

$$(b) |E_s| = \sqrt{\frac{|E_i|^2 \sigma}{4\pi r^2}} = \sqrt{\frac{1.708^2 \times 8}{4\pi \times 14400 \times 10^6}} = \underline{\underline{11.36 \mu\text{V/m}}}$$

$$(c) P_c = P_i \sigma = \frac{1.708^2}{240\pi} (8) = \underline{\underline{30.95 \text{ mW}}}$$

$$(d) P_i = \frac{|E|^2}{2\eta_o} = \frac{(11.36)^2 \times 10^{-12}}{240\pi} = 1.712 \times 10^{-13} \text{ W/m}^2$$

$$\lambda = \frac{3 \times 10^8}{15 \times 10^8} = 0.2 \text{ m}, A_{2r} = \frac{\lambda^2 G}{4\pi} = \frac{0.04 \times 3500}{4\pi}$$

$$P_r = P_a A_{er} = 1.712 \times 10^{-13} \times 11.14 = 1.907 \times 10^{-12}$$

$$\text{or } P_r = \frac{(\lambda G_d)^2 \sigma P_{rad}}{(4\pi)^3 r^4} = \frac{(0.2 \times 3500)^2 \times 8 \times 2 \times 10^5}{(4\pi)^3 \times 12^4 \times 10^{16}}$$

$$= \underline{\underline{1.91 \times 10^{-12} \text{ W}}}$$

Prob. 13.40

$$\lambda = \frac{c}{f} = \frac{3 \times 10^8}{6 \times 10^6} = 0.5 \text{ m}$$

$$P_r = G_{dr} G_{dt} \left(\frac{\lambda}{4\pi r} \right)^2 P_t = (I)(I) \left(\frac{0.5}{4\pi \times 10^3} \right)^2 (80)$$

$$= \underline{0.1267 \mu W}$$

Prob. 13.41

$$P_r = \frac{(\lambda G_d)^2 \sigma P_{rad}}{(4\pi)^3 r^4} \rightarrow P_{rad} = \frac{(4\pi)^3 r^4 P_r}{(\lambda G_d)^2 \sigma}$$

$$\lambda = \frac{c}{f} = \frac{3 \times 10^8}{6 \times 10^9} = \frac{1}{20} \quad (r = 250m)$$

$$40 = \log_{10} G_d \rightarrow G_d = 10^4$$

$$P_{rad} = \frac{(4\pi)^3 (0.25 \times 10^3)^4 \times 2 \times 10^{-6}}{\left(\frac{1}{20} \times 10^4 \right)^2 \times 0.8} = \underline{7.52 W}$$

Prob. 13.42

$$P_{rad} = \frac{4\pi}{G_{dt} G_{dr}} \left(\frac{4\pi r_1 r_2}{\lambda} \right)^2 \frac{P_r}{\sigma}$$

$$\text{But } G_{dt} = 36 dB = 10^{3.6} = 3981.1$$

$$G_{dt} = 20 dB = 10^2 = 100$$

$$\lambda = \frac{c}{f} = \frac{3 \times 10^8}{5 \times 10^9} = 0.06$$

$$r_1 = 3 km, r_2 = 5 km$$

$$P_{rad} = \frac{4\pi}{3981.1 \times 100} \left(\frac{4\pi \times 15 \times 10^6}{6 \times 10^{-2}} \right)^2 \frac{8 \times 10^{-12}}{2.4}$$

$$= \underline{1.038 kW}$$

CHAPTER 14**P. E. 14.1**

$$S_i = \frac{1+0.4}{1-0.4} = \frac{1.4}{0.6} = \underline{\underline{2.333}}$$

$$S_o = \frac{1+0.2}{1-0.2} = \frac{1.2}{0.8} = \underline{\underline{1.5}}$$

P. E. 14.2

(a) By Snell's law, $n_1 \sin \theta_1 = n_2 \sin \theta_2$. Thus

$$\theta_2 = 90^\circ \quad \longrightarrow \quad \sin \theta_2 = 1$$

$$\sin \theta_1 = n_2/n_1, \quad \theta_1 = \sin^{-1} n_2/n_1 = \sin^{-1} 1.465/1.48 = \underline{\underline{81.83^\circ}}$$

$$(b) NA = \sqrt{n_1^2 - n_2^2} = \sqrt{1.48^2 - 1.465^2} = \underline{\underline{0.21}}$$

P. E. 14.3

$$\alpha l = 10 \log P(0)/P(l) = 0.2 \times 10 = 2$$

$$P(0)/P(l) = 10^{0.2}, \text{ i.e. } P(l) = P(0) 10^{-0.2} = 0.631 P(0)$$

$$\text{i.e. } \underline{\underline{63.1\%}}$$

Prob. 14.1 Microwave is used:

- (1) For surveying land with a piece of equipment called the *tellurometer*. This radar system can precisely measure the distance between two points.
- (2) For guidance. The guidance of missiles, the launching and homing guidance of space vehicles, and the control of ships are performed with the aid of microwaves.
- (3) In semiconductor devices. A large number of new microwave semiconductor devices have been developed for the purpose of microwave oscillator, amplification, mixing/detection, frequency multiplication, and switching. Without such achievement, the majority of today's microwave systems could not exist.

Prob. 14.2 (a) In terms of the S-parameters, the T-parameters are given by

$$T_{11} = 1/S_{21}, \quad T_{12} = -S_{22}/S_{21}, \quad T_{21} = S_{11}/S_{21}, \quad T_{22} = S_{12} - S_{11} S_{22}/S_{21}$$

$$(b) \quad T_{11} = 1/0.4 = 2.5, \quad T_{12} = -0.2/0.4,$$

$$T_{21} = 0.2/0.4, \quad T_{22} = 0.4 - 0.2 \times 0.2/0.4 = 0.3$$

Hence,

$$T = \begin{bmatrix} 2.5 & 0.5 \\ -0.5 & 0.3 \end{bmatrix}$$

Prob. 14.3 Since $Z_L = Z_0$, $\Gamma_L = 0$.

$$\Gamma_i = S_{11} = 0.33 - j0.15$$

$$\Gamma_g = (Z_g - Z_0) / (Z_g + Z_0) = (2 - 1) / (2 + 1) = 1/3$$


$$\begin{aligned}\Gamma_o &= S_{22} + S_{12}S_{21}\Gamma_g \cdot (1 - S_{11} - \Gamma_g) \\ &= 0.44 - j0.62 + 0.56 \times 0.56 \times (1/3) / [1 - (0.11 - j0.05)] \\ &= 0.5571 - j0.6266\end{aligned}$$

Prob. 14.4 The microwave wavelengths are of the same magnitude as the circuit components. The wavelength in air at a microwave frequency of 300 GHz, for example, is 1 mm. The physical dimension of the lumped element must be in this range to avoid interference. Also, the leads connecting the lumped element probably have much more inductance and capacitance than is needed.

Prob. 14.5

$$\lambda = c/f = \frac{3 \times 10^8}{8.4 \times 10^9} = 3.571 \text{ mm}$$

Prob. 14.6



$$i_c + i_R = 0; \text{ hence } Cdv/dt + v/R = 0$$


$$\text{or } dv/v = -dt/RC$$

$$\text{so that } \ln v = -t/\tau + \ln v_0, \quad \tau = RC = 125 \times 10^{-12} \times 2 \times 10^3 = 0.5 \mu s$$

$$v = v_0 e^{-t/\tau}, \quad v(0) = v_0 = 1500$$

$$i_c = C \frac{dv}{dt} = C (-1/\tau) v_0 e^{-v/\tau} = \frac{-125 \times 10^{-12}}{0.5 \times 10^{-6}} \times 1500 e^{-v/\tau}$$

$$= -0.375 e^{-v/\tau} A, \quad \underline{\underline{\tau = 0.5 \mu s}}$$

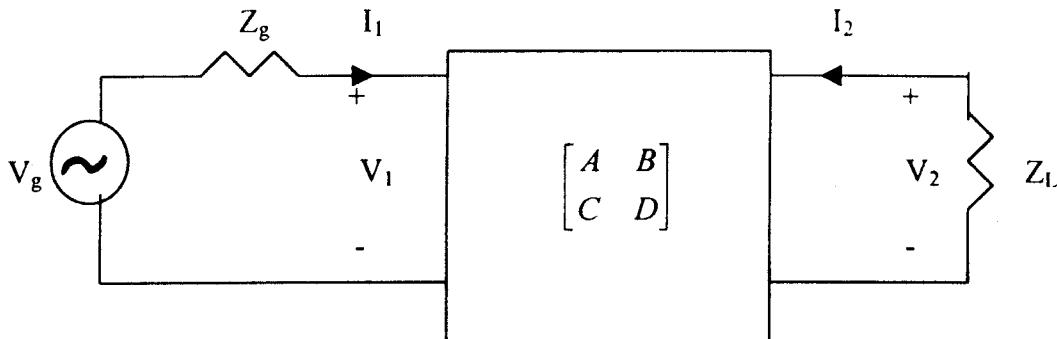Prob. 14.7

By definition .

$$V_1 = AV_2 - BI_2 \quad (1)$$

$$I_1 = CV_2 - DI_2 \quad (2)$$

We eliminate I_1 and I_2 .

$$V_g = V_1 + Z_g I_1 \quad \text{or} \quad I_1 = (V_g - V_1)/Z_g \quad (3)$$

$$V_2 = -Z_L I_2 \quad \text{or} \quad I_2 = -V_2/Z_L \quad (4)$$

Substituting (3) and (4) into (1) and (2) and expressing V_1 and V_2 in terms of V_g , we obtain

$$IL = 20 \log \frac{V_1}{V_2} = 20 \log_{10} \left| \frac{AZ_L + B + CZ_g Z_L + DZ_g}{Z_g + Z_L} \right|$$

Prob. 14.8

$$(a) R_{dc} = \frac{l}{\sigma S} = \frac{10^3}{0.96 \times 10^{-4} \times 6.1 \times 10^7} = \underline{\underline{16.73 \text{ m}\Omega / \text{km}}}$$

$$(b) R_{ac} = \frac{l}{\delta w \sigma}, \quad \pi a^2 = 0.8 \times 1.2 = 0.96 \quad \text{or} \quad a = 0.5528$$

$$\delta = \frac{1}{\sqrt{\pi f \mu \sigma}} = \frac{1}{\sqrt{\pi \times 6 \times 10^6 \times 4 \pi \times 10^{-7} \times 6.1 \times 10^7}} = \frac{1}{12 \pi \times 10^3}$$

$$R_{ac} = \frac{1000 \times 12 \pi \times 10^3}{1.2 \times 10^{-2} \times 6.1 \times 10^7} = \underline{\underline{51.5 \Omega}}$$

Prob. 14.9

$$n = c/u_m = \frac{3 \times 10^8}{2.1 \times 10^8} = \underline{1.428}$$

Prob. 14.10 When an optical fiber is used as the transmission medium, cable radiation is eliminated. Thus, optical fibers offer total EMI isolation because they neither emit nor pick up EM waves.

Prob. 14.11

$$(a) NA = \sqrt{n_1^2 - n_2^2} = \sqrt{1.62^2 - 1.604^2} = \underline{0.2271}$$

$$(b) NA = \sin \theta_a = 0.2271 \text{ or } \theta_a = \sin^{-1} 0.2271 = \underline{13.13^\circ}$$

$$(c) V = \frac{\pi d}{\lambda} NA = \frac{\pi \times 50 \times 10^{-6} \times 0.2271}{1300 \times 10^{-9}} = 27.441$$

$$N = V^2/2 = \underline{376 \text{ modes}}$$

Prob. 14.12

$$(a) V = \frac{\pi d}{\lambda} \sqrt{n_1^2 - n_2^2} = \frac{\pi \times 2.5 \times 10^{-6} \times 2}{1.3 \times 10^{-9}} \sqrt{1.45^2 - 1^2} = \underline{12.69}$$

$$(b) NA = \sqrt{n_1^2 - n_2^2} = \sqrt{1.45^2 - 1^2} = \underline{1.05}$$

$$(c) N = V^2/2 = \underline{80 \text{ modes}}$$

Prob. 14.13

$$(a) NA = \sin \theta_a = \sqrt{n_1^2 - n_2^2} = \sqrt{1.53^2 - 1.45^2} = 0.4883 \\ \theta_a = \sin^{-1} 0.4883 = \underline{29.23^\circ}$$

$$(b) P(l)/P(0) = 10^{-\alpha l / 10} = 10^{-0.4 \times 5 / 10} = 0.631$$

$$\text{i.e. } \underline{63.1 \%}$$

Prob. 14.14

$$P(l) = P(0) e^{-\alpha l / 10} = 10 e^{-0.5 \times 0.85 / 10} \text{ mW} = \underline{9.584 \text{ mW}}$$

Prob. 14.15 As shown in Eq. (10.35), $\log_{10} P_1/P_2 = 0.434 \ln P_1/P_2$,

$$1 \text{ Np} = 20 \log_{10} e = 8.686 \text{ dB} \text{ or } 1 \text{ Np/km} = 8.686 \text{ dB/km.}$$

or $1\text{Np/m} = 8686 \text{ dB/km}$. Thus,

$$\alpha_{10} = \underline{\underline{8686}} \alpha_{14}$$

Prob. 14.16

$$P(0) = P(l) e^{\alpha l/10} = 0.2 e^{0.4 \times 30/10} \text{ mW} = \underline{\underline{0.664 \text{ mW}}}$$

Prob. 14.17 See text.

CHAPTER 15

P. E. 15.1 The program in Fig. 15.3 was used to obtain the plot in Fig. 15.5.

P. E. 15.2 For the exact solution,

$$(D^2 + 1)y = 0 \rightarrow y = A \cos x + B \sin x$$

$$y(0) = 0 \rightarrow A = 0$$

$$y(1) = 1 \rightarrow 1 = B \sin 1 \text{ or } B = 1/\sin 1$$

$$\text{Thus, } y = \sin x / \sin 1$$

For the finite difference solution,

$$y'' + y = 0 \rightarrow \frac{y(x + \Delta) - 2y(x) + y(x - \Delta)}{\Delta^2} + y = 0$$

or

$$y(x) = \frac{y(x + \Delta) + y(x - \Delta)}{2 - \Delta^2}, y(0) = 0, y(1) = 1, \Delta = 1/4$$

With the Fortran program shown below, we obtain the exact result y_e and FD result y .

```


DIMENSION
Y(0)=0.0
Y(4)=1.0
DEL=0.25
DO 10 N=1,20 ! N = NO. OF ITERATIONS
DO 10 I=1,3
Y(I)=(Y(I+1)+Y(I-1))/(2.0-DEL*DEL)
X=FLOAT(I)*DEL
YE=SIN(X)/SIN(1.0)
PRINT *, N, I, Y(I), YE
10 CONTINUE
STOP
END

```

The results are listed below.

y(x)	N=5	N=10	N=15	N=20	Exact $y_e(x)$
y(0.25)	0.2498	0.2924	0.2942	0.2943	0.2941
y(0.5)	0.5242	0.5682	0.5701	0.5701	0.5697
y(0.75)	0.7867	0.8094	0.8104	0.8104	0.8101

P. E. 14.3 By applying eq. (15.16) to each node as shown below, we obtain the following results after 5 iterations.

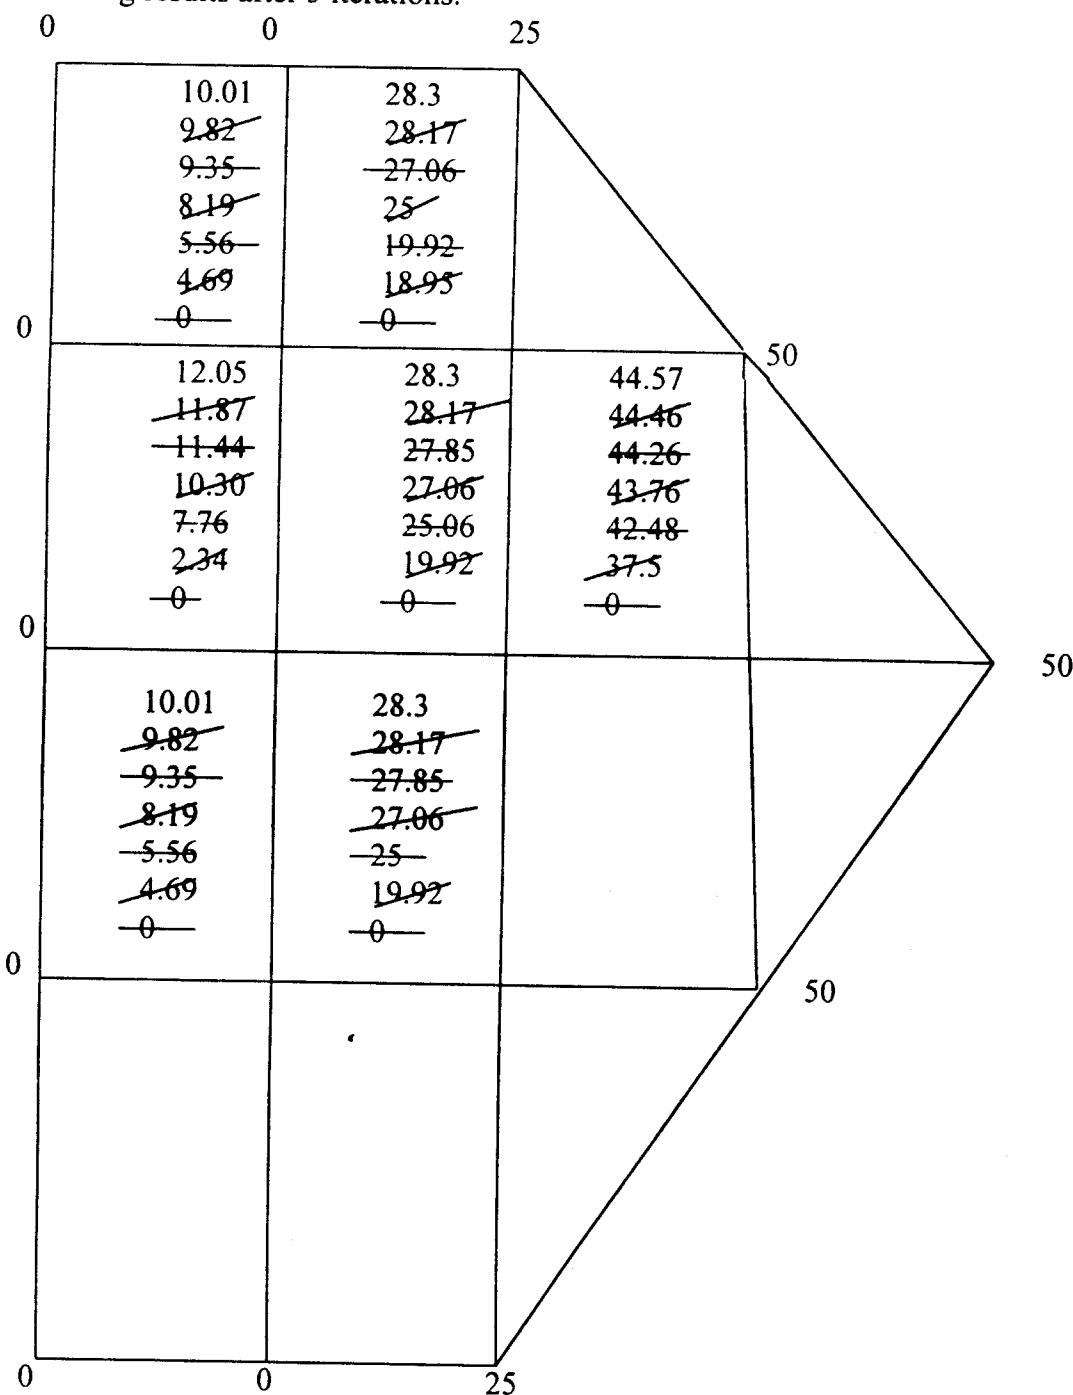

P. E. 15.4 (a) Using the program in Fig. 15.16 with $NX = 4$ and $NY = 8$, we obtain the potential at center as

$$V(2,4) = \underline{23.80} \text{ V}$$


(b) Using the same program with $NX = 12$ and $NY = 24$, the potential at the center is

$$V(6,12) = \underline{23.89} \text{ V}$$

P. E. 15.5 By combining the ideas in Figs. 15.21 and 15.25, and dividing each wire into N segments, the results listed in Table 14.2 is obtained.

P. E. 15.6

(a)

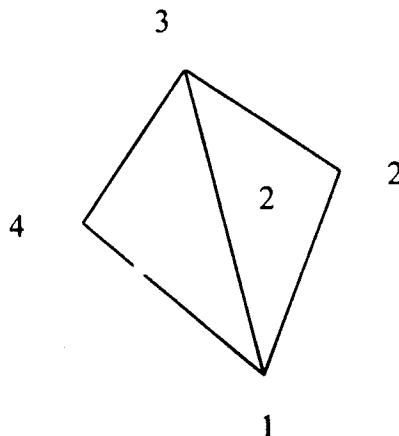

For element 1, local 1-2-3 corresponds with global 1-3-4 so that $A_1 = 0.35$,

$$P_1 = 0.8, P_2 = 0.6, P_3 = -1.4, Q_1 = -0.5, Q_2 = 0.5, Q_3 = 0$$

$$C^{(1)} = \begin{bmatrix} 0.6357 & 0.1643 & -0.8 \\ 0.1643 & 0.4357 & -0.6 \\ -0.8 & -0.6 & 1.4 \end{bmatrix}$$

For element 2, local 1-2-3 corresponds with global 1-2-3 so that $A_2 = 0.7$,

$$P_1 = 0.1, P_2 = 1.4, P_3 = -1.5, Q_1 = -1, Q_2 = 0, Q_3 = 1$$


$$C^{(2)} = \begin{bmatrix} 0.3607 & 0.05 & -0.4107 \\ 0.05 & 0.7 & -0.75 \\ -0.4107 & -0.75 & 1.1607 \end{bmatrix}$$

The global coefficient matrix is given by

$$C = \begin{bmatrix} C_{11}^{(1)} + C_{11}^{(2)} & C_{12}^{(2)} & C_{12}^{(1)} + C_{13}^{(2)} & C_{13}^{(1)} \\ C_{21}^{(2)} & C_{22}^{(2)} & C_{23}^{(2)} & 0 \\ C_{21}^{(1)} + C_{31}^{(2)} & C_{32}^{(2)} & C_{22}^{(1)} + C_{33}^{(2)} & C_{23}^{(1)} \\ C_{31}^{(1)} & 0 & C_{32}^{(2)} & C_{33}^{(1)} \end{bmatrix}$$

$$= \begin{bmatrix} 0.9964 & 0.05 & -0.2464 & -0.8 \\ 0.05 & 0.7 & 0.75 & 0 \\ -0.2464 & 0.75 & 1.596 & -0.6 \\ -0.8 & 0 & -0.6 & 1.4 \end{bmatrix}$$

(b)

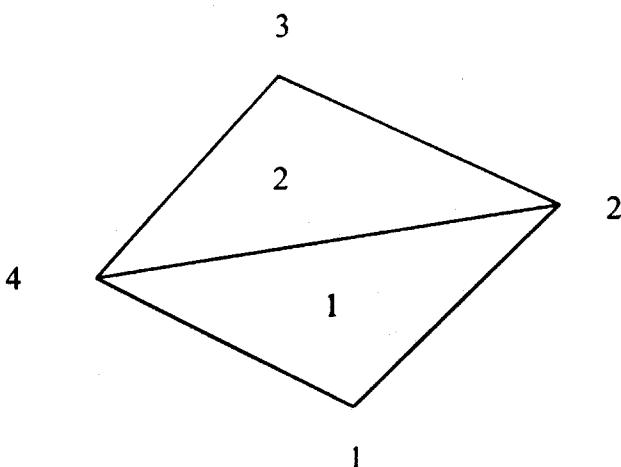

For element 1, local 1-2-3 corresponds with global 1-2-4 and $A_1 = 0.675$,

$$P_1 = 0.8, P_2 = -0.9, P_3 = 0.4, Q_1 = -0.5, Q_2 = 1.5, Q_3 = -1.0$$

$$C^{(2)} = \begin{bmatrix} 0.5933 & -0.9800 & 0.3867 \\ -0.9800 & 2.040 & -1.060 \\ 0.3867 & -1.060 & 0.6733 \end{bmatrix}$$

For element 2, local 1-2-3 corresponds with global 2-3-4 and $A_2 = 0.375$,

$$P_1 = 0.1, P_2 = 1.4, P_3 = -1.5, Q_1 = -1, Q_2 = 0, Q_3 = 1$$

$$C^{(1)} = \begin{bmatrix} 0.3607 & 0.05 & -0.4107 \\ 0.05 & 0.7 & -0.75 \\ -0.4107 & -0.75 & 1.1607 \end{bmatrix}$$

The global coefficient matrix is

$$C = \begin{bmatrix} C_{11}^{(1)} & C_{12}^{(1)} & 0 & C_{13}^{(1)} \\ C_{21}^{(1)} & C_{22}^{(1)} + C_{11}^{(2)} & C_{12}^{(2)} & C_{23}^{(1)} + C_{13}^{(2)} \\ 0 & C_{12}^{(2)} & C_{22}^{(2)} & C_{23}^{(2)} \\ C_{31}^{(1)} & C_{32}^{(1)} + C_{31}^{(2)} & C_{32}^{(2)} & C_{33}^{(1)} + C_{33}^{(2)} \end{bmatrix}$$

$$= \begin{bmatrix} 1.333 & -0.0777 & 0 & -1.056 \\ -0.0777 & 0.8192 & -0.98 & 0.2386 \\ 0 & -0.98 & 2.04 & -01.06 \\ -1.056 & 0.2386 & -1.06 & 1.877 \end{bmatrix}$$

P. E. 15.7 We use the FORTRAN program in Fig. 15.34. The input data for the region in Fig. 14.35 is as follows:

NE = 32; ND = 26; NP = 18;

NL = [1 2 5

2 4 5
2 3 5
3 6 5
4 5 9
5 10 9
5 6 10
6 11 10
7 8 12
8 13 12
8 9 13
9 14 13
9 10 14
10 15 15
10 11 14
11 16 15
12 13 17
13 18 17
13 14 18
14 19 18
14 15 19
15 20 19
15 16 20
16 21 20
17 18 22

18 23 22
 18 19 22
 19 24 23
 19 20 24
 20 25 24
 20 21 25
 21 26 25];

$X = [1.0 \ 2.5 \ 2.0 \ 1.0 \ 1.5 \ 2.0 \ 0.0 \ 0.5 \ 1.0 \ 1.5 \ 2.0 \ 0.0 \ 0.5 \ 1.0 \ 1.5 \ 2.0 \ 0.0 \ 0.5 \ 1.0 \ 1.5 \ 1.5 \ 0.0 \ 0.5 \ 1.0 \ 1.5 \ 2.0];$

$Y = [0.0 \ 0.0 \ 0.0 \ 0.5 \ 0.5 \ 0.5 \ 1.0 \ 1.0 \ 1.0 \ 1.0 \ 1.0 \ 1.5 \ 1.5 \ 1.5 \ 1.5 \ 1.5 \ 2.0 \ 2.0 \ 2.0 \ 2.0 \ 2.5 \ 2.5 \ 2.5 \ 2.5 \ 2.5 \ 2.5];$

$NDP = [1 \ 2 \ 3 \ 6 \ 11 \ 16 \ 21 \ 26 \ 25 \ 24 \ 23 \ 22 \ 17 \ 12 \ 7 \ 8 \ 9 \ 4];$

$VAL = [0.0 \ 0.0 \ 15.0 \ 30.0 \ 30.0 \ 30.0 \ 30.0 \ 20.0 \ 20.0 \ 20.0 \ 10.0 \ 0.0 \ 0.0 \ 0.0 \ 0.0 \ 0.0];$


With this data, the finite element (FEM) solution is compared with the finite difference (FD) solution as shown below.

Node #	x	y	FEM	FD
5	1.5	0.5	11.265	11.25
10	1.5	1.0	15.06	15.02
13	0.5	1.5	4.958	4.705
14	1.0	1.5	9.788	9.545
15	1.0	1.5	18.97	18.84
18	0.5	2.0	10.04	9.659
19	1.0	2.0	15.22	14.85
20	1.5	2.0	21.05	20.87

Prob. 15.1 (a) Using the Matlab code in Fig. 15.3, we input the data as:

```
>> plotit( [-1 2 1], [-1 0; 0 2; 1 0], 1, 1, 0.01, 0.01, 8, 2, 5 )
```


and the plot is shown below.

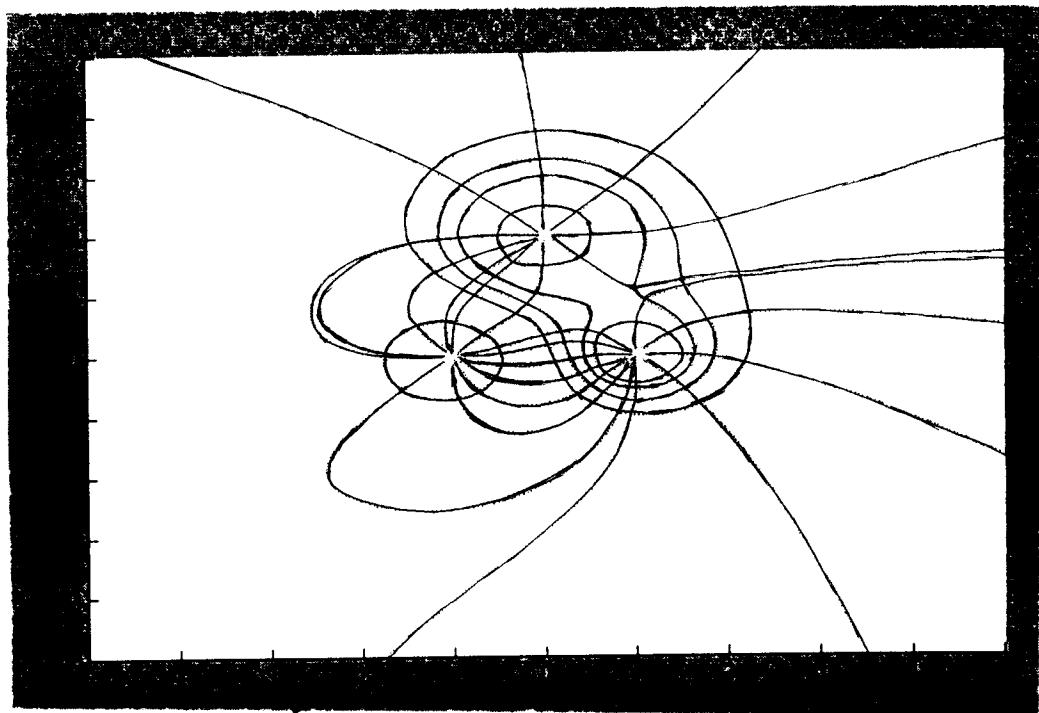

(b) Using the Matlab code in Fig. 15.3, we input the required data as:

```
>> plotit( [1 1 1 1 1], [-1 -1; -1 1; 1 -1; 1 1; 0 0], 1, 1, 0.02, 0.01, 6, 2, 5 )
```

and obtain the plot shown below.

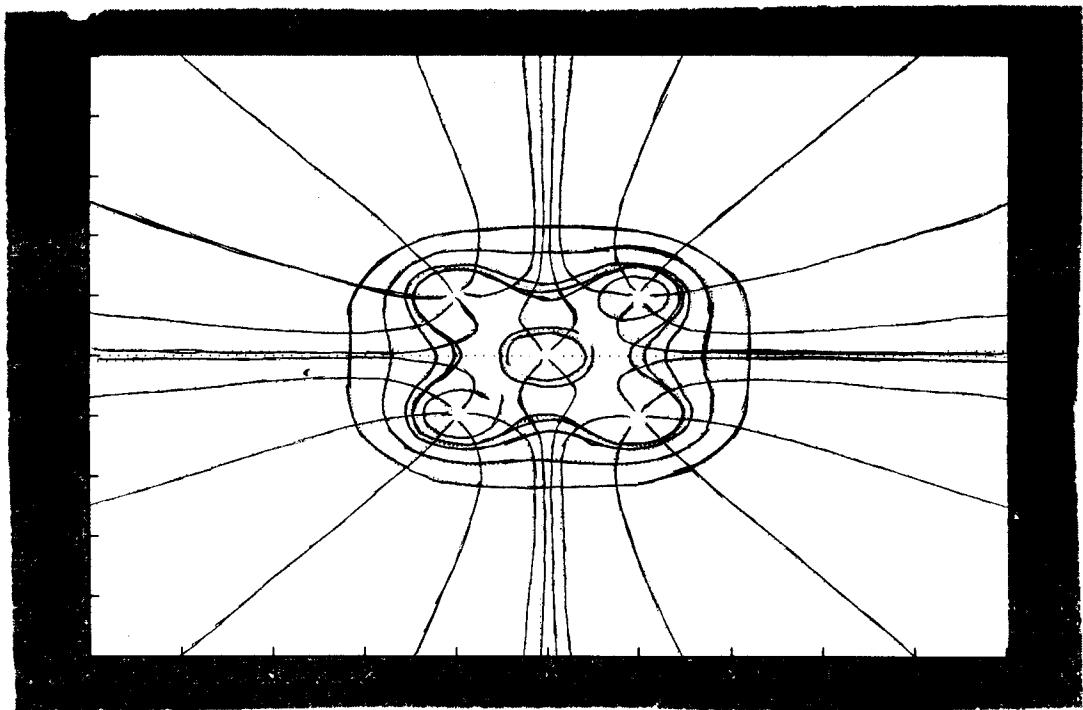

Prob. 15.2

Exact solution: $y = Ax + B$

$$x = 0, y = 0 \longrightarrow B = 0; \quad x = 1, y = 10 \longrightarrow A = 10$$

$$y = 10x; \quad y(0.25) = \underline{2.5}$$

Finite difference solution:

$$\frac{d^2y}{dx^2} \approx \frac{y(x + \Delta) - 2y(x) + y(x - \Delta)}{\Delta^2} = 0$$

or

$$y(x) = \frac{1}{2}[y(x + \Delta) + y(x - \Delta)], \Delta = 0.25$$

Using this scheme, we obtain the result shown below.

Iteration	0	0.25	0.5	0.75	1.0
0	0	0	0	0	10
1	0	0	0	5	10
2	0	0	2.5	7.5	10
3	0	1.25	5.0	8.75	10
4	0	2.5	5.625	7.5	10
5	0	2.8125	5.0	7.8125	10
6	0	2.5	5.3125	7.5	10
...

From this, we obtain $y(0.25) = \underline{2.5}$.

Prob. 15.3 (a)

$$\frac{dV}{dx} = \frac{V(x_o + \Delta x) - V(x_o - \Delta x)}{2\Delta x}$$

For $\Delta x = 0.05$ and at $x = 0.15$,

$$\frac{dV}{dx} = \frac{2.0134 - 1.00}{0.05 \times 2} = \underline{\underline{10.117}}$$

$$\frac{d^2V}{dx^2} = \frac{V(x + \Delta x) - 2V(x_o) + V(x_o - \Delta x)}{(\Delta x)^2} = \frac{2.0134 + 1.0017 - 2 \times 1.5056}{(0.05)^2} = \underline{\underline{1.56}}$$

(b) $V = 10 \sinh x$, $dV/dx = 10 \cosh x$. At $x = 0.15$, $dV/dx = \underline{\underline{10.113}}$

which is close to the numerical estimate.

$$d^2V/dx^2 = 10 \sinh x. \text{ At } x = 0.15, d^2V/dx^2 = \underline{\underline{1.5056}}$$

which is lower than the numerical value.

Prob. 15.4

$$\nabla^2 V = \frac{\partial^2 V}{\partial \rho^2} + \frac{1}{\rho} \frac{\partial V}{\partial \rho} + \frac{\partial^2 V}{\partial z^2} = 0$$

The equivalent finite difference expression is

$$\begin{aligned} & \frac{V(\rho_o + \Delta \rho, z_o) - 2V(\rho_o, z_o) + V(\rho_o - \Delta \rho, z_o)}{(\Delta \rho)^2} + \frac{1}{\rho_o} \frac{V(\rho_o + \Delta \rho, z_o) - V(\rho_o - \Delta \rho, z_o)}{2\Delta \rho} \\ & + \frac{V(\rho_o, z_o + \Delta z) - 2V(\rho_o, z_o) + V(\rho_o, z_o - \Delta z)}{(\Delta z)^2} = 0 \end{aligned}$$

If $\Delta z = \Delta \rho = h$, rearranging terms gives

$$\begin{aligned} V(\rho_o, z_o) &= \frac{1}{4}V(\rho_o, z_o + h) + \frac{1}{4}V(\rho_o, z_o - h) + \left(1 + \frac{h}{2\rho_o}\right)V(\rho_o + h, z_o) \\ &+ \left(1 - \frac{h}{2\rho_o}\right)V(\rho_o - h, z_o) \end{aligned}$$

as expected.

Prob. 15.5

$$\nabla^2 V = \frac{\hat{c}^2 V}{\hat{\rho}^2} + \frac{1}{\hat{\rho}} \frac{\hat{c} V}{\hat{c} \hat{\rho}} + \frac{1}{\hat{\rho}^2} \frac{\hat{c}^2 V}{\hat{c} \hat{\phi}^2} = 0. \quad (1)$$

as expected.

Prob. 15.5

$$\nabla^2 V = \frac{\partial^2 V}{\partial \rho^2} + \frac{1}{\rho} \frac{\partial V}{\partial \rho} + \frac{1}{\rho^2} \frac{\partial^2 V}{\partial \phi^2} = 0, \quad (1)$$

$$\frac{\partial^2 V}{\partial \rho^2} = \frac{V_{m+1}^n - 2V_m^n + V_{m-1}^n}{(\Delta \rho)^2}, \quad (2)$$

$$\frac{\partial^2 V}{\partial \phi^2} = \frac{V_m^{n+1} - 2V_m^n + V_m^{n-1}}{(\Delta \phi)^2}, \quad (3)$$

$$\left. \frac{\partial V}{\partial \rho} \right|_{m,n} = \frac{V_{m+1}^n - V_{m-1}^n}{2\Delta \rho}. \quad (4)$$

Substituting (2) to (4) into (1) gives

$$\begin{aligned} \nabla^2 V &= \frac{V_{m+1}^n - V_{m-1}^n}{m\Delta \rho(2\Delta \rho)} + \frac{V_{m+1}^n - 2V_m^n + V_{m-1}^n}{(\Delta \rho)^2} + \frac{V_m^{n+1} - 2V_m^n + V_m^{n-1}}{(m\Delta \rho\Delta \phi)^2} \\ &= \frac{1}{(\Delta \rho)^2} \left[\left(1 - \frac{1}{2m}\right)V_{m-1}^n - 2V_m^n + \left(1 + \frac{1}{2m}\right)V_{m-1}^n + \frac{1}{(m\Delta \phi)^2} (V_m^{n+1} - 2V_m^n + V_m^{n-1}) \right] \end{aligned}$$

as required.

Prob. 15.6

$$V_o = \frac{V_1 + V_2 + V_3 + V_4}{4} = \frac{-10 + 0 + 30 + 60}{4} = \underline{20 \text{ V}}$$

Prob. 15.7

$$V_1 = 0.25(V_2 + 30 + 0 - 20) = V_2/4 + 2.5 \quad (1)$$

$$V_2 = 0.25(V_1 + 20 + 0 + 30) = V_1/4 + 12.5 \quad (2)$$

Substituting (2) into (1),

$$V_1 = 2.5 + V_1/16 + 3.125 \quad \longrightarrow \quad V_1 = \underline{6 \text{ V}}$$

$$\frac{\partial^2 V}{\partial \rho^2} = \frac{V_{m+1}^{n+1} - 2V_m^n + V_{m-1}^n}{(\Delta \rho)^2}, \quad (2)$$

$$\frac{\partial^2 V}{\partial \phi^2} = \frac{V_m^{n+1} - 2V_m^n + V_m^{n-1}}{(\Delta \phi)^2}, \quad (3)$$

$$\left. \frac{\partial V}{\partial \rho} \right|_{m,n} = \frac{V_{m+1}^n - V_{m-1}^n}{2\Delta \rho}. \quad (4)$$

Substituting (2) to (4) into (1) gives

$$\begin{aligned} \nabla^2 V &= \frac{V_{m+1}^n - V_{m-1}^n}{m\Delta\rho(2\Delta\rho)} + \frac{V_{m+1}^{n+1} - 2V_m^n + V_{m-1}^n}{(\Delta\rho)^2} + \frac{V_m^{n+1} - 2V_m^n + V_m^{n-1}}{(m\Delta\rho\Delta\phi)^2} \\ &= \frac{1}{(\Delta\rho)^2} \left[\left(1 - \frac{1}{2m}\right)V_{m-1}^n - 2V_m^n + \left(1 + \frac{1}{2m}\right)V_{m+1}^n + \frac{1}{(m\Delta\phi)^2}(V_m^{n+1} - 2V_m^n + V_m^{n-1}) \right] \end{aligned}$$

as required.

Prob. 15.6

$$V_o = \frac{V_1 + V_2 + V_3 + V_4}{4} = \frac{-10 + 0 + 30 + 60}{4} = \underline{\underline{20}} \text{ V}$$

Prob. 15.7

$$V_1 = 0.25(V_2 + 30 + 0 - 20) = V_2/4 + 2.5 \quad (1)$$

$$V_2 = 0.25(V_1 + 20 + 0 + 30) = V_1/4 + 12.5 \quad (2)$$

Substituting (2) into (1),

$$V_1 = 2.5 + V_1/16 + 3.125 \quad \longrightarrow \quad V_1 = \underline{\underline{6}} \text{ V}$$

$$V_2 = V_1/4 + 12.5 = \underline{\underline{14}} \text{ V}$$

Prob. 15.8

$$k = \frac{h^2 \rho_o}{\epsilon_o} = \frac{10^{-2} \times \frac{100}{\pi} \times 10^{-9}}{\frac{10^{-9}}{36\pi}} = 36$$

$$V_1 = \frac{1}{4} (V_2 + 30 + 0 + 20 + k) = V_2/4 + 11.5 \quad (1)$$

$$V_2 = \frac{1}{4} (V_1 + 20 + 0 + 30 + k) = V_1/4 + 21.5 \quad (2)$$

Substituting (2) into (1) gives

$$V_1 = 11.5 + V_1/16 + 5.375 \longrightarrow V_1 = \underline{18 \text{ V}}$$

$$V_2 = V_1/4 + 12.5 = \underline{26 \text{ V}}$$

Prob. 15.9 (a)

$$V_1 = \frac{1}{4} (0 + 100 + V_3 + V_2), \quad V_2 = \frac{1}{4} (0 + 100 + V_1 + V_4),$$

$$V_3 = \frac{1}{4} (0 + 0 + V_1 + V_4), \quad V_4 = \frac{1}{4} (0 + 0 + V_2 + V_3)$$

We apply these iteratively n=5 times and obtain the result below.

n	0	1	2	3	4	5
V ₁	0	25	34.375	36.72	37.305	37.45
V ₂	0	31.25	35.937	37.11	37.403	37.475
V ₃	0	6.25	10.937	12.11	12.403	12.475
V ₄	0	9.375	11.917	12.305	12.45	12.487

(b) By band matrix method,

$$4V_1 - V_2 - V_3 = 100$$

$$-V_1 + 4V_2 - V_4 = 100$$

$$-V_1 + 4V_3 - V_4 = 0$$

$$-V_2 - V_3 + 4V_3 = 0$$

Prob. 15.11 (a) Matrix [A] remains the same. To each term of matrix [B], we add

$$-h^2 \rho_s / \varepsilon.$$

(b) Let $\Delta x = \Delta y = h = 0.05$ so that $NX = 20 = NY$.

$$\frac{\rho_s}{\varepsilon} = \frac{x(y-1)10^{-9}}{10^{-9} / 36\pi} = 36\pi x(y-1)$$

Modify the program in Fig. 15.16 as follows.

```

DO 40 I=1, NX -1
DO 40 J=1, NY-1
SAVE = V(I,J)
X = H*FLOAT(I)
Y=H*FLOAT(J)
RO = 36.0*PIE*X*(Y-1)
V(I,J) = 0.25*( V(I+1,J) + V(I-1,J) + V(I,J+1) + V(I,J-1) + H*H* - C )
40 CONTINUE

```

This is the major change. However, in addition to this, we must set

```

V1 = 0.0
V2 = 10.0
V3 = 20.0
V4 = -10.0
NX = 20
NY = 20

```

The results are:

$$V_a = 4.276, V_b = 9.577, V_c = 11.126, V_d = -2.013, V_e = 2.919,$$

$$V_f = 6.069, V_g = -3.424, V_h = -0.109, V_i = 2.909$$

Prob. 15.12

$$\begin{aligned} \frac{1}{c^2} \frac{\Phi'^{+1}_{m,n} + \Phi'^{-1}_{m,n} - 2\Phi'_{m,n}}{(\Delta t)^2} &= \frac{\Phi'_{m+1,n} + \Phi'_{m-1,n} - 2\Phi'_{m,n}}{(\Delta x)^2} \\ &+ \frac{\Phi'_{m,n+1} + \Phi'_{m,n-1} - 2\Phi'_{m,n}}{(\Delta z)^2} \end{aligned}$$

If $h = \Delta x = \Delta z$, then after rearranging we obtain

$$\begin{aligned}\Phi^{J+1}_{m,n} &= 2\Phi^{J+1}_{m,n} - \Phi^{J-1}_{m,n} + \alpha(\Phi^J_{m,n} + \Phi^J_{m-1,n} - 2\Phi^J_{m,n}) \\ &\quad \alpha(\Phi^J_{m,n+1} + \Phi^J_{m,n-1} - 2\Phi^{J+1}_{m,n})\end{aligned}$$

where $\alpha = (c\Delta t / h)^2$.

Prob. 15.13 Applying the finite difference formula derived above, the following programs was developed.

```
DIMENSION V(0:50,0:50)

U = 1.0
DT = 0.1
DX = 0.1
NT = 4/DT
NX = 1/DX
ALPHA = (U*DT/DX)**2
DO 10 I=0,NX-1
DO 10 J=0,NT-1
10   V(I,J) = 0.0
      DO 20 J=0,NT-1
      V(0,J) = 0
      V(10,J) = 0
20   CONTINUE
      DO 30 I=0,NT-1
      V(I,0) = SIN(FLOAT(I-1)*3.142/10.0)
      V(I,1) = V(I,0)
30   CONTINUE
      DO 40 J=1,NT-2
      DO 40 I=1,NX-2
      V(I,J+1) = ALPHA*( V(I-1,J) + V(I+1,J) ) + 2*(1.0 - ALPHA)*V(I,J)
      1 - V(I,J-1)
40   CONTINUE
      ...
      WRITE(6,*) V(I,J)
      ...
      STOP
END
```

The results of the finite difference algorithm agree perfectly with the exact solution as shown below.

Prob. 15.16 To determine V and E at (-1,4,5), we use the program in Fig. 15.21.

$$V = \int_0^L \frac{\rho_L dl}{4\pi\epsilon_0 R}, \text{ where } R = \sqrt{26 + (4 - y')^2}$$

$$V = \frac{\Delta}{4\pi\epsilon} \sum_{k=1}^N \frac{\rho_k}{\sqrt{26 + (y - y_k)^2}}$$

$$E = \int_0^L \frac{\rho_L dl R}{4\pi\epsilon_0 R^3}$$

where $\mathbf{R} = \mathbf{r} - \mathbf{r}' = (-1, 4-y', 5)$, $R = |\mathbf{R}|$

$$E_x \approx \frac{\Delta}{4\pi\epsilon} \sum_{k=1}^N \frac{(-1)\rho_k}{[26 + (4 - y_k)^2]^{3/2}}$$

$$E_y \approx \frac{\Delta}{4\pi\epsilon} \sum_{k=1}^N \frac{(4 - y_k)\rho_k}{[26 + (4 - y_k)^2]^{3/2}}$$

$$E_z = -5E_x$$

For $N = 20$, $V_0 = 1V$, $L = 1m$, $a = 1mm$, the following lines are added to the program in the Fortran version of Fig. 15.21 after 90 CONTINUE statement. (See second edition.)


```

V = 0.0
EX = 0.0
EY = 0.0
FACTOR = DELTA/(4.0*PIE*EO)
DO 100 K=1,N
R = SQRT(26.0 + (4.0 - YY(K))**2)
V=V + RO(K)/R
EX = EX - R0(K)/R**3
EY = EY + (4.0 - YY(K))*RO(K)/R**3
100 CONTINUE
V = V*FACTOR
EX = EX*FACTOR
EY= EY*FACTOR
EZ = -5.0*EX
PRINT *, V, EX, EY, EZ
...
```

The result is:

$$V = 12.47 \text{ mV}, \mathbf{E} = -0.3266 \mathbf{a}_x + 1.1353 \mathbf{a}_y + 1.6331 \mathbf{a}_z \text{ mV/m}$$

Prob. 15.17

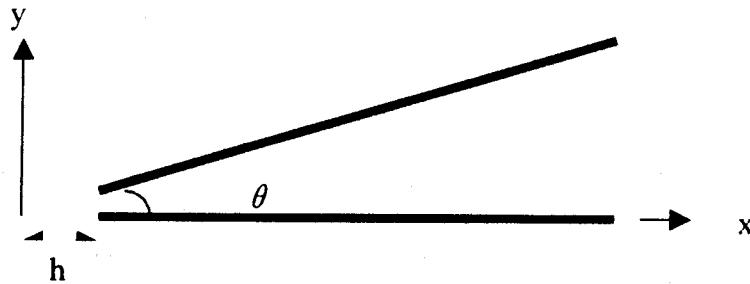

To find C, take the following steps:

- (1) Divide each line into N equal segments. Number the segments in the lower conductor as 1, 2, ..., N and segments in the upper conductor as N+1, N+2, ..., 2N,
- (2) Determine the coordinate (x_k, y_k) for the center of each segment.

For the lower conductor, $y_k = 0, k=1, \dots, N, x_k = h + \Delta (k-1/2), k = 1, 2, \dots, N$

For the upper conductor, $x_k = [h + \Delta (k-1/2)] \sin \theta, k=N+1, N+2, \dots, 2N$,

$$x_k = [h + \Delta (k-1/2)] \cos \theta, k = N+1, N+2, \dots, 2N$$

where h is determined from the gap g as

$$h = \frac{g}{2 \sin \theta / 2}$$

- (3) Calculate the matrices $[V]$ and $[A]$ with the following elements

$$V_k = \begin{cases} V_o, k = 1, \dots, N \\ -V_o, k = N+1, \dots, 2N \end{cases}$$

$$A_{ij} = \begin{cases} \frac{\Delta}{4\pi\epsilon R_y}, i \neq j \\ 2 \ln \Delta / a, i = j \end{cases}$$

$$\text{where } R_y = \sqrt{(x_i - x_j)^2 + (y_i - y_j)^2}$$

- (4) Invert matrix $[A]$ and find $[\rho] = [A]^{-1} [V]$.

(5) Find the charge Q on one conductor

$$Q = \sum \rho_k \Delta = \Delta \sum_{k=1}^N \rho_k$$

(6) Find $C = |Q|/V_0$

Taking $N = 10$, $V_0 = 1.0$, a program was developed to obtain the following result.

θ	C (in pF)
10	8.5483
20	9.0677
30	8.893
40	8.606
50	13.004
60	8.5505
70	9.3711
80	8.7762
90	8.665
100	8.665
110	10.179
120	8.544
130	9.892
140	8.7449
150	9.5106
160	8.5488
170	11.32
180	8.6278

Prob. 15.18 We may modify the program in Fig. 15.25 and obtain $Z_0 \approx 50\Omega$. For details, see M. N. O. Sadiku, "Numerical Techniques in Electromagnetics," (CRC Press, 1992), pp. 338-340.

Prob. 15.19 (a) Exact solution yields

$$C = 2\pi\epsilon / In(\Delta / a) = 8.02607 \times 10^{-11} \text{ F/m and } Z_0 = 41.559\Omega$$

where $a = 1\text{cm}$ and $\Delta = 2\text{cm}$. The numerical solution is shown below.

$$C = 17.02 \text{ pF}$$

Prob. 15.21 From given figure, we obtain

$$\alpha_1 = \frac{A_1}{A} = \frac{1}{2A} \begin{vmatrix} 1 & x & y \\ 1 & x_2 & y_2 \\ 1 & x_3 & y_3 \end{vmatrix} = \frac{1}{2A} [(x_2y_3 - x_3y_2) + (y_2 - y_3)x + (x_3 - x_2)y]$$

as expected. The same applies for α_2 and α_3 .

Prob. 15.22 (a) For the element in (a),

$$A = \frac{1}{2} (1 - 0.5 \times 0.25) = 0.4375$$

$$\alpha_1 = \frac{1}{2A} [0.875 - 0.75x - 0.5y] = 1 - 0.8571x - 0.5714y$$

$$\alpha_2 = \frac{1}{2A} [0 + x - 0.5y] = 1.1428x - 0.5714y$$

$$\alpha_3 = \frac{1}{2A} [0 - 0.25x + y] = -0.2857x + 1.1429y$$

For the element in (b),

$$A = \frac{1}{2} [0.5 \times 1.6 - (-1) \times 1.6] = 1.2$$

$$\alpha_1 = 1.25 - 0.625y$$

$$\alpha_2 = -1.5 + 0.667x + 0.4167y$$

$$\alpha_3 = 1.25 - 0.667x + 0.2083y$$

(b) For the element in (a),

$$P_1 = -0.75, P_2 = 1.0, P_3 = -0.25, Q_1 = -0.5 = Q_2, Q_3 = 1.0$$

$$C_{\eta} = \frac{1}{4A} [P_i P_i + Q_j Q_j] = (\nabla \alpha_1 \cdot \nabla \alpha_2) A$$

Hence,

Along side 23, $y = -3x/2 + 5$

$$20 = 15x/2 - 15 + 50 + 15/4 \rightarrow x = -5/2 \text{ (not possible)}$$

Hence intersection occurs at

(1.5, 0.5) along 12 and (0.9286, 0.9286) along 13

(b) At (2,1),

$$\alpha_1 = \frac{4}{15}, \quad \alpha_2 = \frac{6}{15}, \quad \alpha_3 = \frac{5}{15}$$

$$V(1,2) = \alpha_1 V_1 + \alpha_2 V_2 + \alpha_3 V_3 = (400 + 300 + 150)/15 = \underline{\underline{56.67 \text{ V}}}$$

Prob. 15.24

$$2A = \begin{vmatrix} 1 & 0 & 0 \\ 1 & 2 & -1 \\ 1 & 1 & 4 \end{vmatrix} = 9$$

$$\alpha_1 = \frac{1}{9}[(0-0) + (4-0)x + (0-1)y] = \frac{1}{9}(4x - y)$$

$$\alpha_2 = \frac{1}{9}[(0-0) + (0+1)x + (2-0)y] = \frac{1}{9}(x + 2y)$$

$$\alpha_3 = \frac{1}{9}[(8+1) + (-1-4)x + (1-2)y] = \frac{1}{9}(9 - 5x - y)$$

$$V_e = \alpha_1 V_{e1} + \alpha_2 V_{e2} + \alpha_3 V_{e3}$$



$$V(1,2) = 8(4-2)/9 + 12(1+4)/9 + 10(9-5-1)/9 = 96/9 = \underline{\underline{10.667 \text{ V}}}$$

At the center $\alpha_1 = \alpha_2 = \alpha_3 = 1/3$ so that

$$V(\text{center}) = (8 + 12 + 10)/3 = 10$$

$$\text{Or at the center, } (x, y) = (0 + 1 + 2, 0 + 4 - 1)/3 = (1,1)$$

$$V(1,1) = 8(3)/9 + 12(3)/9 + 10(3)/9 = 10 \text{ V}$$

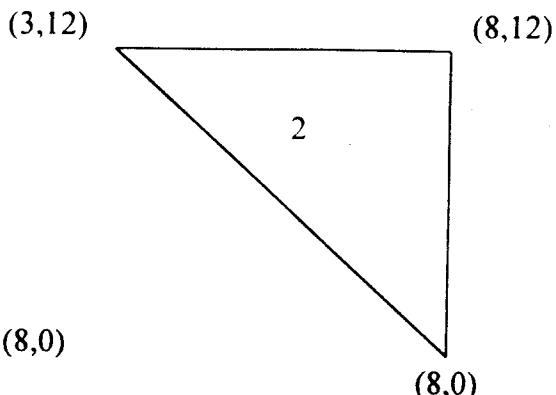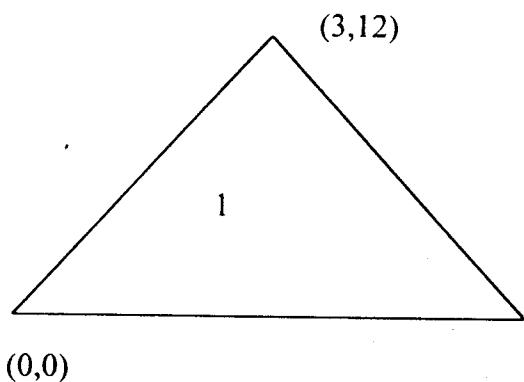Prob. 15.25

For element 1, local numbering 1-2-3 corresponds to global numbering 4-2-1.

$$P_1 = 12, P_2 = 0, P_3 = -12, Q_1 = -3, Q_2 = 8, Q_3 = -5,$$

$$A = (0 + 12 \times 8)/2 = 48$$

$$C_y = \frac{1}{4 \times 48} [P_j P_i + Q_j Q_i]$$

$$C^{(1)} = \begin{bmatrix} 0.7956 & -0.1248 & -0.6708 \\ -0.1248 & 0.3328 & -0.208 \\ -0.6708 & -0.208 & 0.8788 \end{bmatrix}$$

For element 2, local numbering 1-2-3 corresponds to global numbering 2-4-3.

$$P_1 = -12, P_2 = 0, P_3 = 12, Q_1 = 0, Q_2 = -5, Q_3 = 5,$$


$$A = (0 + 60)/2 = 30$$

$$C_y = \frac{1}{4 \times 48} [P_j P_i + Q_j Q_i]$$

$$C^{(1)} = \begin{bmatrix} 1.2 & 0 & -1.2 \\ 0 & 0.208 & -0.208 \\ -1.2 & -0.208 & 1.408 \end{bmatrix}$$

$$C = \begin{bmatrix} C_{33}^{(1)} & C_{23}^{(1)} & 0 & C_{31}^{(1)} \\ C_{23}^{(1)} & C_{22}^{(1)} + C_{11}^{(2)} & C_{13}^{(2)} & C_{21}^{(1)} + C_{12}^{(2)} \\ 0 & C_{31}^{(2)} & C_{33}^{(2)} & C_{32}^{(2)} \\ C_{13}^{(1)} & C_{21}^{(1)} + C_{21}^{(2)} & C_{23}^{(2)} & C_{22}^{(2)} + C_{11}^{(1)} \end{bmatrix}$$

$$= \begin{bmatrix} 0.8788 & -0.208 & 0 & -0.6708 \\ -0.208 & 1.528 & -1.2 & -0.1248 \\ 0 & -1.2 & 1.408 & -0.206 \\ -0.6708 & -0.1248 & -0.208 & 1.0036 \end{bmatrix}$$

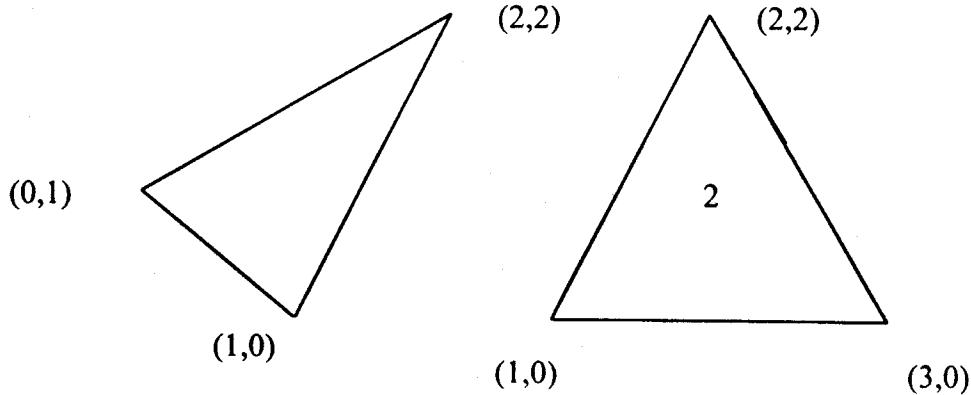Prob. 15.26

For element 1, local numbering 1-2-3 corresponds to global numbering 1-2-4.

$$P_1 = -2, P_2 = 1, P_3 = -1; Q_1 = 1, Q_2 = -2, Q_3 = 1,$$

$$A = (P_2 Q_3 - P_3 Q_2)/2 = 3/2, \text{ i.e. } 4A = 6$$

$$C_y = \frac{1}{4A} [P_j P_i + Q_j Q_i]$$

$$C^{(1)} = \frac{1}{6} \begin{bmatrix} 5 & -4 & -1 \\ -4 & 5 & -1 \\ -1 & -1 & 2 \end{bmatrix}$$

For element 2, local numbering 1-2-3 corresponds to global numbering 4-2-3.

$$P_1 = 0, P_2 = -2, P_3 = 2, Q_1 = 2, Q_2 = -1, Q_3 = -1,$$

$$A = 2, \quad 4A = 8$$

$$C^{(2)} = \frac{1}{8} \begin{bmatrix} 4 & -2 & -2 \\ -2 & 5 & -3 \\ -2 & -3 & 5 \end{bmatrix}$$

The global coefficient matrix is

$$C = \begin{bmatrix} C_{11}^{(1)} & C_{12}^{(1)} & 0 & C_{13}^{(1)} \\ C_{12}^{(1)} & C_{22}^{(1)} + C_{22}^{(2)} & C_{23}^{(2)} & C_{23}^{(1)} + C_{21}^{(2)} \\ 0 & C_{23}^{(2)} & C_{33}^{(2)} & C_{31}^{(2)} \\ C_{13}^{(1)} & C_{23}^{(1)} + C_{21}^{(2)} & C_{31}^{(2)} & C_{33}^{(1)} + C_{11}^{(2)} \end{bmatrix}$$

$$= \begin{bmatrix} 0.8333 & -0.667 & 0 & -0.1667 \\ -0.6667 & 1.4583 & -0.375 & -0.4167 \\ 0 & -0.375 & 0.625 & -0.25 \\ -0.1667 & -0.4167 & -0.25 & 0.833 \end{bmatrix}$$

Prob. 15.27 We can do it by hand as in Example 15.6. However, it is easier to prepare an input files and use the program in Fig. 15.54. The Matlab input data is

```
NE = 2;
ND = 4;
NP = 2;
NL = [1 2 4
      2 3 4];
X = [ 0.0 1.0 3.0 2.0];
Y = [ 1.0 0.0 0.0 2.0];
NDP = [ 1 3 ];
VAL = [ 10.0 30.0]
```

The result is $V = \begin{bmatrix} 10 \\ 18 \\ 30 \\ 20 \end{bmatrix}$


From this,

$$V_2 = 18 \text{ V}, \quad V_4 = 20 \text{ V}$$

4	11	10
4	5	11
5	12	11
5	6	12
7	14	13
7	8	14
8	15	14
8	9	15
9	16	15
9	16	16
10	17	16
10	11	17
11	18	17
11	12	18
13	20	19
13	14	20
14	21	20
14	15	21
15	22	21
15	16	22
16	23	22
16	17	23
17	24	23
17	18	24
19	26	25
19	20	26
20	27	26
20	21	27
21	28	27
21	22	28
22	29	28
22	23	29
23	30	29
23	24	30
25	32	31
25	26	32
26	33	32
26	27	33
27	34	33
27	28	34
28	35	34
28	29	35
29	36	35
29	30	36];

$X = [0.0 \ 0.2 \ 0.4 \ 0.6 \ 0.8 \ 1.0 \ 0.0 \ 0.2 \ 0.4 \ 0.6 \ 0.8 \ 1.0 \ 0.0 \ 0.2 \ 0.4 \ 0.6 \ 0.8 \ 1.0 \ 0.0 \ 0.2 \ 0.4 \ 0.6 \ 0.8 \ 1.0]$
 $[0.0 \ 0.2 \ 0.4 \ 0.6 \ 0.8 \ 1.0 \ 0.0 \ 0.2 \ 0.4 \ 0.6 \ 0.8 \ 1.0 \ 0.2 \ 0.4 \ 0.6 \ 0.8 \ 1.0];$

Node no.	FEM Solution	Exact Solution
8	3.635	3.412
9	5.882	5.521
10	5.882	5.521
11	3.635	3.412
14	8.659	8.217
15	14.01	13.30
16	14.01	13.30
17	8.659	8.217
20	16.99	16.37
21	27.49	26.49
22	27.49	26.49
23	16.69	16.37
26	31.81	31.21
27	51.47	50.5
28	51.49	50.5
29	31.81	31.21

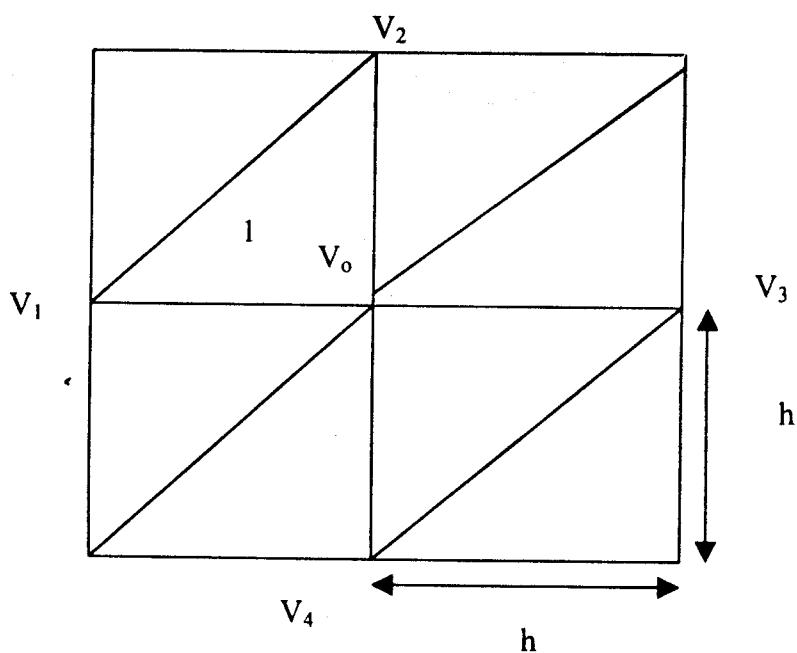Prob. 15.31

For element 1, the local numbering 1-2-3 corresponds with nodes with V_1 , V_2 , and V_3 .

$$V_o = -\frac{1}{C_{oo}} \sum_{i=1}^4 V_i C_{oi}$$

$$C_{\infty} = \sum_{j=1}^4 C_{o_j}^{(e)} = \frac{I}{4h^2/2}(hh + hh)x_2 + \frac{I}{4h^2/2}(hh + 0)x_4 = 4$$

$$C_{o1} = \frac{2x1}{2h^2}[P_3P_1 + Q_3Q_1] = \frac{2}{2h^2}[-hh - 0] = -1$$

$$C_{o2} = \frac{2x1}{2h^2}[P_1P_2 + Q_1Q_2] = \frac{2}{2h^2}[-hx0 + hx(-h)] = -1$$

Similarly, $C_{03} = -1 = C_{04}$. Thus

$$V_o = (V_1 + V_2 + V_3 + V_4)/4$$

which is the same result obtained using FDM.